

JVC

SERVICE MANUAL

COLOR TELEVISION


BASIC CHASSIS

GV


AV-27950 (US&CA)

AV-27980 (US&CA)

AV-27985 (US&CA)



(RM-C755) (RM-C752) (RM-C888)
[AV-27950] [AV-27980] [AV-27985]

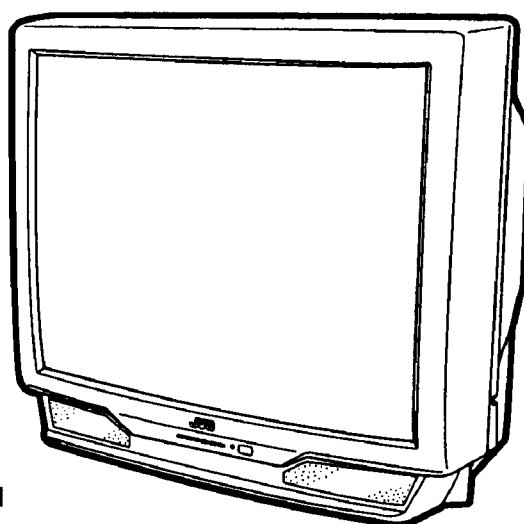

CONTENTS

■ SPECIFICATIONS	2
■ SAFETY PRECAUTIONS	3
■ FEATURES	4
■ MAIN DIFFERENCE LIST	4
■ FUNCTIONS	5
■ SPECIFIC SERVICE INSTRUCTIONS	6
■ SERVICE ADJUSTMENTS	11
★ STANDARD CIRCUIT DIAGRAM (APPENDED)	2-1
■ PARTS LIST	29

SPECIFICATIONS

Items	Contents		
	AV-27950 (US&CA)	AV-27980 (US&CA)	AV-27985 (US&CA)
Dimensions (W×H×D)	25-3/4"×23-3/8"×20-1/2" / 65.4cm×59.1cm×51.8cm		
Mass	67.8lbs / 30.8kg		
TV System and Color system			
TV RF System	CCIR(M)		
Color System	NTSC		
Sound System	BTSC (Multi Channel Sound)		
TV Receiving Channels and Frequency			
VL Band	(02~06) 54MHz~88MHz		
VH Band	(07~13) 174MHz~216MHz		
UHF Band	(14~69) 470MHz~806MHz		
CATV Receiving Channels and Frequency			
Low Band	(02~06, A-8) by (02~06&01)	} (54MHz~804MHz)	
High Band	(07~13) by (07~13)		
Mid Band	(A~1) by (14~22)		
Super Band	(J~W) by (23~36)		
Hyper Band	(W+1~W+28) by (37~64)		
Ultra Band	(W+29~W+84) by (65~125)		
Sub Mid Band	(A8, A4~A1) by (01, 96~99)		
TV/CATV Total Channel	180 Channels		
Intermediate Frequency			
Video IF Carrier	45.75 MHz		
Sound IF Carrier	41.25 MHz (4.5MHz)		
Color Sub Carrier	3.58 MHz		
Power Input	120V AC, 60Hz		
Power Consumption	120W(US) / 1.5A(CA)	126W(US) / 1.8A(CA)	←
Picture Tube	27" (68cm) measured diagonally, Full Square		
High Voltage	29kV±1.3kV (at zero beam current)		
Speaker	2"×4-3/4" / 5×12cm Oblong type×2		
Audio Power Output	3W+3W		
Input (1 / 2)	Video : 1Vp-p 75Ω (RCA pin jack) Audio : 500mVrms (-4dBs), High Impedance (RCA pin jack) S-Video Y : 1Vp-p positive (negative sync provided, when terminated with 75Ω) C : 0.286Vp-p (burst signal, when terminated with 75Ω)		
Audio Output (Variable / Fix : Selectable)	Variable : More then 0~1550mVrms (+6dBs) Low Impedance (400Hz when modulated 100%) (RCA pin jack) Fix : 500mVrms(-4dBs) Low Impedance (400Hz when modulated 100%) (RCA pin jack)		
IR mouse / G-Link Output	×	3.5mm mini jack	←
AV Compu link EX Input	3.5mm mini jack		
Antenna terminal	75Ω (VHF/UHF) Terminal, F-Type Connector		
Remote Control Unit	RM-C755-1C (AA/R6/UM-3 battery×2)	RM-C752-1C (AA/R6/UM-3 battery×2)	RM-C888-1A (AA/R6/UM-3 battery×2)

Design & specification are subject to change without notice.

SAFETY PRECAUTIONS

1. The design of this product contains special hardware, many circuits and components specially for safety purposes. For continued protection, no changes should be made to the original design unless authorized in writing by the manufacturer. Replacement parts must be identical to those used in the original circuits. Service should be performed by qualified personnel only.
2. Alterations of the design or circuitry of the products should not be made. Any design alterations or additions will void the manufacturer's warranty and will further relieve the manufacturer of responsibility for personal injury or property damage resulting therefrom.
3. Many electrical and mechanical parts in the products have special safety-related characteristics. These characteristics are often not evident from visual inspection nor can the protection afforded by them necessarily be obtained by using replacement components rated for higher voltage, wattage, etc. Replacement parts which have these special safety characteristics are identified in the parts list of Service manual. **Electrical components having such features are identified by shading on the schematics and by (Δ) on the parts list in Service manual.** The use of a substitute replacement which does not have the same safety characteristics as the recommended replacement part shown in the parts list of Service manual may cause shock, fire, or other hazards.
4. **Use isolation transformer when hot chassis.**
The chassis and any sub-chassis contained in some products are connected to one side of the AC power line. An isolation transformer of adequate capacity should be inserted between the product and the AC power supply point while performing any service on some products when the HOT chassis is exposed.
5. **Don't short between the LIVE side ground and ISOLATED (NEUTRAL) side ground or EARTH side ground when repairing.**
Some model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : (⊥) side GND, the ISOLATED(NEUTRAL) : (⌋) side GND and EARTH : (⊕) side GND. Don't short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND and never measure with a measuring apparatus (oscilloscope etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND or EARTH side GND at the same time.
If above note will not be kept, a fuse or any parts will be broken.
6. If any repair has been made to the chassis, it is recommended that the B1 setting should be checked or adjusted (See ADJUSTMENT OF B1 POWER SUPPLY).
7. The high voltage applied to the picture tube must conform with that specified in Service manual. Excessive high voltage can cause an increase in X-Ray emission, arcing and possible component damage, therefore operation under excessive high voltage conditions should be kept to a minimum, or should be prevented. If severe arcing occurs, remove the AC power immediately and determine the cause by visual inspection (incorrect installation, cracked or melted high voltage harness, poor soldering, etc.). To maintain the proper minimum level of soft X-Ray emission, components in the high voltage circuitry including the picture tube must be the exact replacements or alternatives approved by the manufacturer of the complete product.
8. Do not check high voltage by drawing an arc. Use a high voltage meter or a high voltage probe with a VTVM. Discharge the picture tube before attempting meter connection, by connecting a clip lead to the ground frame and connecting the other end of the lead through a 10kΩ 2W resistor to the anode button.
9. When service is required, observe the original lead dress. Extra precaution should be given to assure correct lead dress in the high voltage circuit area. Where a short circuit has occurred, those components that indicate evidence of overheating should be replaced. Always use the manufacturer's replacement components.

10. Isolation Check

(Safety for Electrical Shock Hazard)

After re-assembling the product, always perform an isolation check on the exposed metal parts of the cabinet (antenna terminals, video/audio input and output terminals, Control knobs, metal cabinet, screwheads, earphone jack, control shafts, etc.) to be sure the product is safe to operate without danger of electrical shock.

(1) Dielectric Strength Test

The isolation between the AC primary circuit and all metal parts exposed to the user, particularly any exposed metal part having a return path to the chassis should withstand a voltage of 1100V AC (r.m.s.) for a period of one second.

(... Withstand a voltage of 1100V AC (r.m.s.) to an appliance rated up to 120V, and 3000V AC (r.m.s.) to an appliance rated 200V or more, for a period of one second.)

This method of test requires a test equipment not generally found in the service trade.

(2) Leakage Current Check


Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Using a "Leakage Current Tester", measure the leakage current from each exposed metal part of the cabinet, particularly any exposed metal part having a return path to the chassis, to a known good earth ground (water pipe, etc.). Any leakage current must not exceed 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.2mA AC (r.m.s.).

● Alternate Check Method

Plug the AC line cord directly into the AC outlet (do not use a line isolation transformer during this check.). Use an AC voltmeter having 1000 ohms per volt or more sensitivity in the following manner. Connect a 1500Ω 10W resistor paralleled by a 0.15μF AC-type capacitor between an exposed metal part and a known good earth ground (water pipe, etc.). Measure the AC voltage across the resistor with the AC voltmeter. Move the resistor connection to each exposed metal part, particularly any exposed metal part having a return path to the chassis, and measure the AC voltage across the resistor. Now, reverse the plug in the AC outlet and repeat each measurement. Any voltage measured must not exceed 0.75V AC (r.m.s.). This corresponds to 0.5mA AC (r.m.s.).

However, in tropical area, this must not exceed 0.3V AC (r.m.s.). This corresponds to 0.2mA AC (r.m.s.).

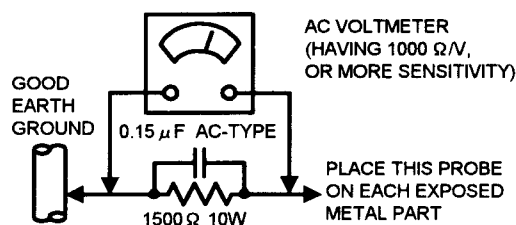

11. High voltage hold down circuit check.


After repair of the high voltage hold down circuit, this circuit shall be checked to operate correctly.

See item "How to check the high voltage hold down circuit".

This mark shows a fast operating fuse, the letters indicated below show the rating.



POWER CORD REPLACEMENT WARNING. Connecting the line side of power cord to "●" mark side.



FEATURES

- New chassis design enables use of a main board with simplified circuitry.
- Comb filter Improved picture quality.
- Provided with 2 tuner (TV/CATV, PIP).
- Full-square CRT (cathode ray tube) reproduces fine textured picture in every detail.
- With AV COMPU LINK EX terminal.
- Closed-caption broadcasts can be viewed.
- With AUDIO. VIDEO INPUT terminal.
- S-VIDEO input terminal for taking best advantage of Super VHS.
- Variable / Fix audio output terminal.
- Built-in PIP system.
- I²C bus control utilizes single chip ICs.
- Built-in TV GUIDE PLUS+ system. [AV-27980/AV-27985]
- Built-in HYPER SCAN system. [AV-27985]


MAIN DIFFERENCE LIST

△	Model	AV-27950 (US&CA)	AV-27980 (US&CA)	AV-27985 (US&CA)
△	Part name			
	MAIN PWB	SGV-1001A-M2	SGV-1005A-M2	←
	CRT SOCKET PWB	SGV-3001A-M2	SGV-3003A-M2	←
	FRONT CONTROL PWB	SGV-4001A-M2	←	←
	AV SELECTOR PWB	SGV-8001A-M2	SGV-8003A-M2	←
	PIP PWB	SGV0P001A-M2	←	←
	GUIDE PLUS + MODULE PWB	×	SGV0T001A-M2	←
	REMOTE CONTROL UNIT	RM-C755-1C	RM-C752-1C	RM-C888-1A
△	INST. BOOK (ENGLISH)	LCT0139-001A-A(US&CA)	LCT0135-001A-A(US&CA)	LCT0137-001A-A(US&CA)
△	INST. BOOK (FRENCH)	LCT0140-001A-A(CA)	LCT0136-001A-A(CA)	LCT0138-001A-A(CA)
	INPUT	INPUT1 (S-VIDEO/VIDEO/AUDIO (L/R)) INPUT2 (VIDEO / AUDIO (L/R))	INPUT1 / INPUT2 (S-VIDEO/VIDEO/AUDIO (L/R))	←
	IR MOUSE/G-LINK JACK	×	○	○
	HYPER SCAN	×	×	○


FUNCTIONS

■ REMOTE CONTROL UNIT


RM-C755-1C [AV-27950]

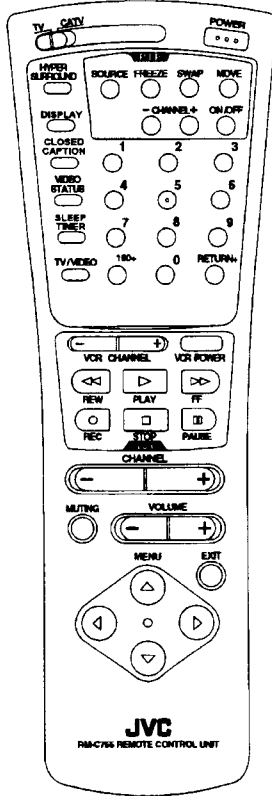


RM-C752-1C [AV-27980]

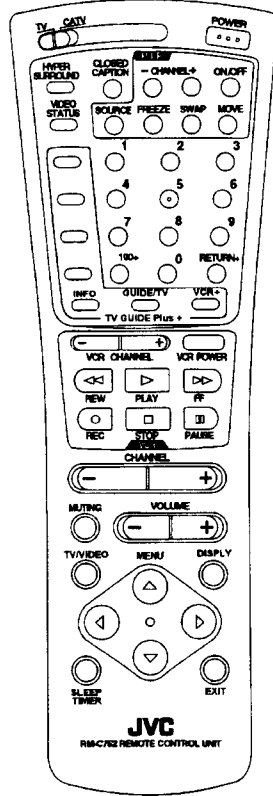

RM-C888-1A [AV-27985]

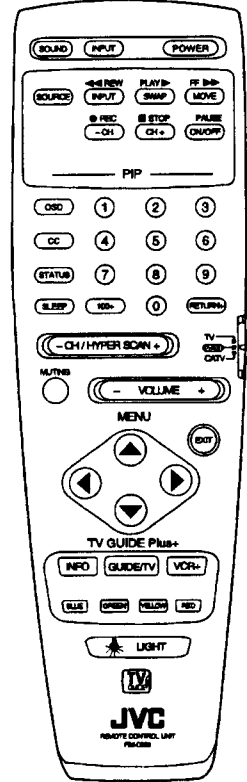


■ FRONT PANEL




■ REAR PANEL

[AV-27950]

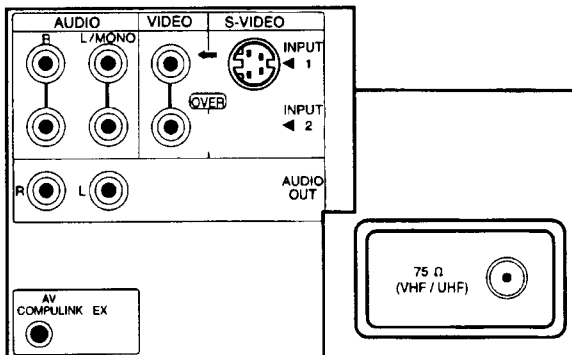

[AV-27980 / AV-27985]

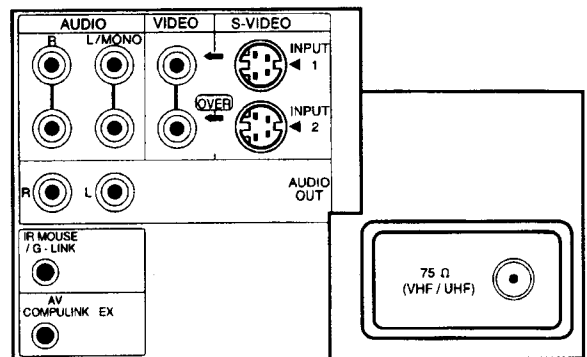

SPECIFIC SERVICE INSTRUCTION

DISASSEMBLY PROCEDURE

REMOVING THE REAR COVER

- Unplug the power supply cord.
 - 1. Remove the 9 screws marked ㉑ as shown in Fig.2.
 - 2. Remove the rear cover toward you.
- * When reinstalling the rear cover, carefully push it inward after inserting the chassis into the rear cover groove.

REMOVING THE CHASSIS

- After removing the rear cover.
 - 1. Slightly raise the both sides of the chassis by hand and remove the 2 claws under the both sides of the chassis from the front cabinet.
 - 2. Draw the chassis backward along the rail in the arrow direction marked ㉒ as shown in the Fig.2.
(If necessary, take off the wire clamp, connector's etc.)
- * When conducting a check with power supplied, be sure to confirm that the CRT earth wire is connected to the CRT SOCKET PWB and the MAIN PWB.

REMOVING THE TERMINAL BOARD

- After removing the rear cover.
- 1. Remove the 3 screws marked ㉓ as shown in Fig.2.
- 2. After removing the claw marked ㉔ in the direction of arrow mark as shown in Fig.1.
- 3. When you pull out the TERMINAL BOARD in the direction of arrow marked ㉕ as shown in Fig.1, it can be removed.
At that time, the connector of the ANTENNA SPLITTER and the TUNER comes out.
- 4. Thus the connector should be securely inserted when the TERMINAL BOARD is installed again.

REMOVING THE FRONT CONTROL PW BOARD

- After removing the rear cover and chassis.
- 1. Remove the 2 screws marked ㉖ as shown in Fig.2.
- 2. Then remove the FRONT CONTROL PWB.

REMOVING THE SPEAKER

- After removing the rear cover and chassis.
- 1. Remove the 2 screws marked ㉗ as shown in Fig.2.
- 2. Follow the same steps when removing the other hand speaker.

CHECKING THE MAIN PW BOARD

- To check the backside of the MAIN PW Board.
- 1. Pull out the chassis. (Refer to REMOVING THE CHASSIS).
- 2. Erect the chassis vertically so that you can easily check the backside of the MAIN PW Board.

[CAUTION]

- When erecting the chassis, be careful so that there will be no contacting with other PWB.
- Before turning on power, make sure that the CRT earth wire and other connectors are properly connected.

WIRE CLAMPING AND CABLE TYING

1. Be sure to clamp the wire.
2. Never remove the cable tie used for tying the wires together.
Should it be inadvertently removed, be sure to tie the wires with a new cable tie.

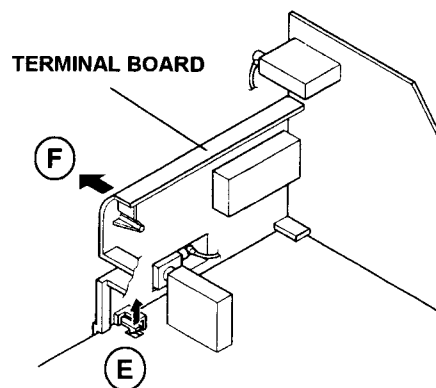


Fig. 1

This exploded view describes about AV-27980 / AV-27985. Although AV-27950 is slightly different from this figure, you can use the exploded view for disassembling the AV-27950 in the same step as for the AV-27980 / AV-27985.

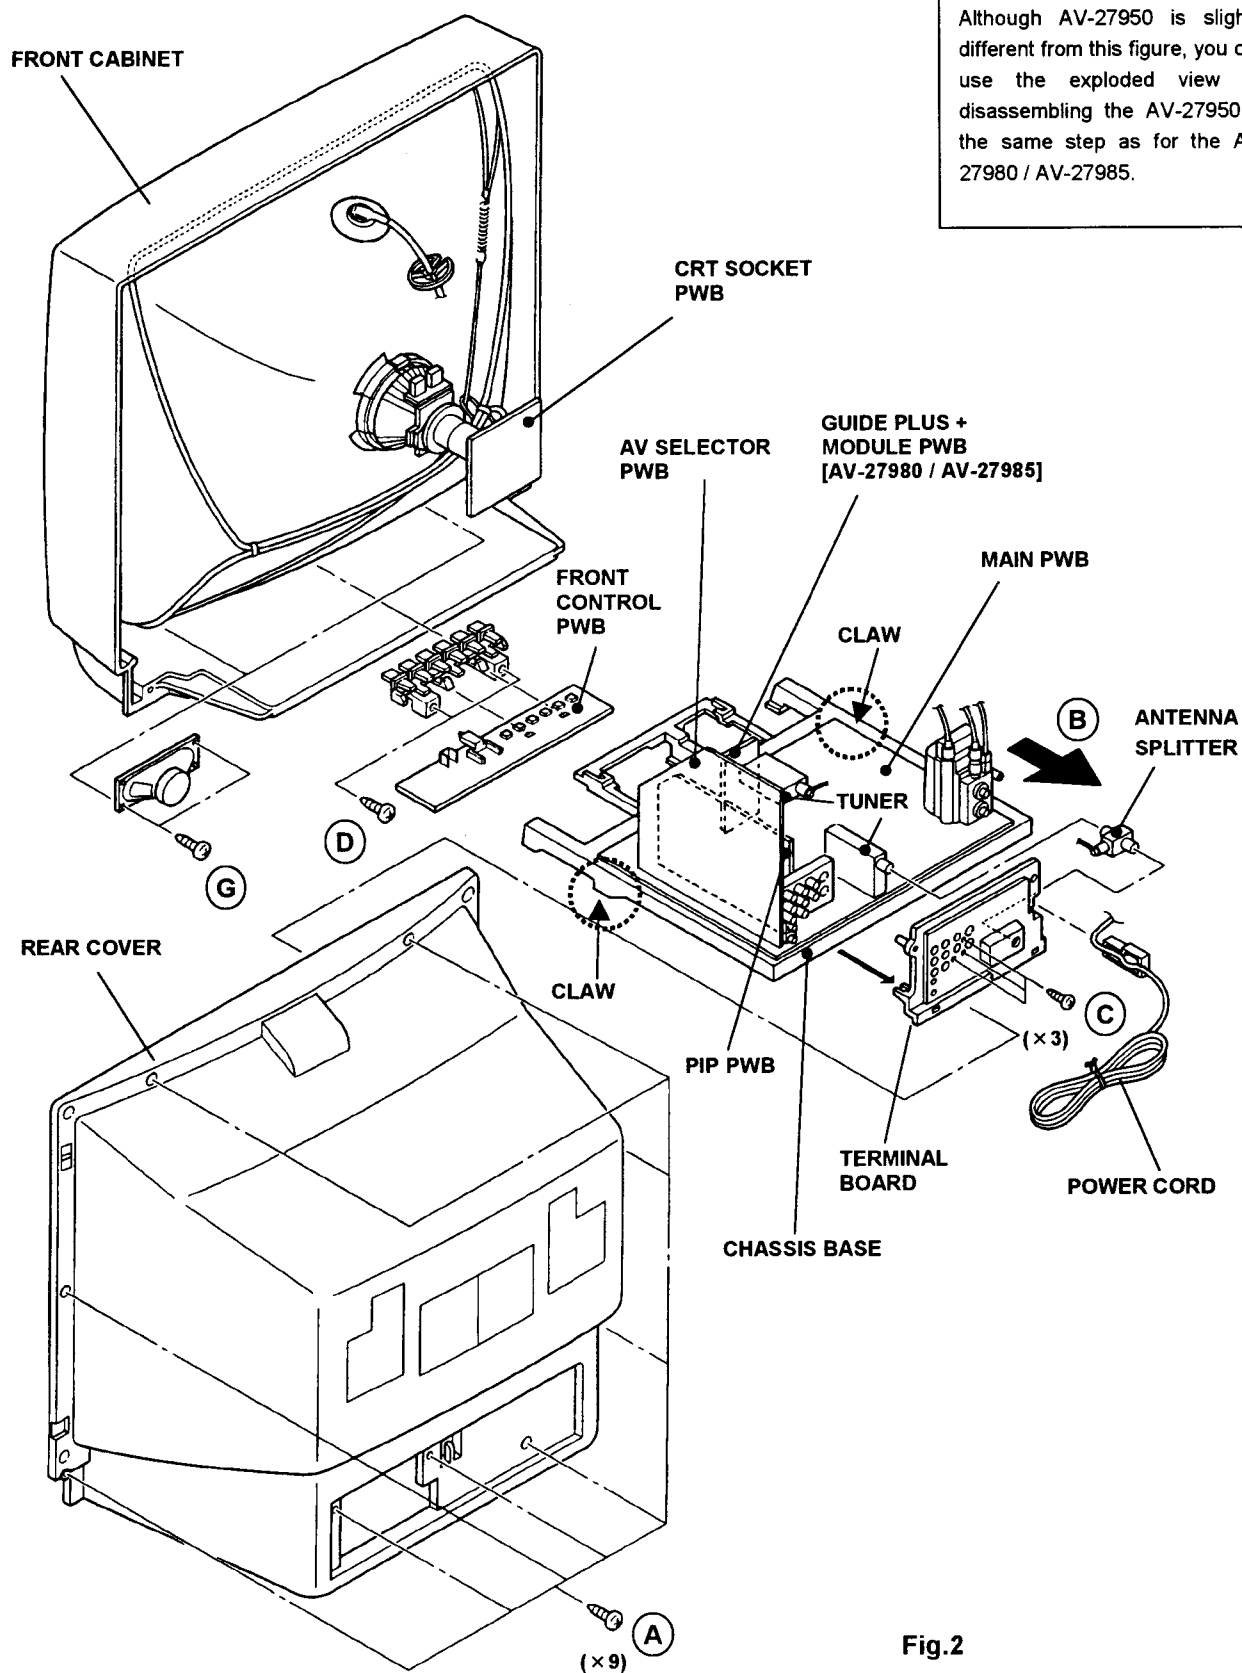


Fig.2

MEMORY IC REPLACEMENT

1. Memory IC

This model uses a memory IC.

This memory IC stores data for proper operation of the video and deflection circuits.

When replacing, be sure to use an IC containing this (initial value) data.

2. Memory IC replacement procedure

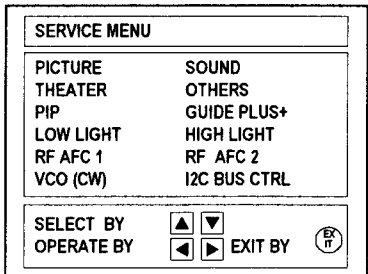
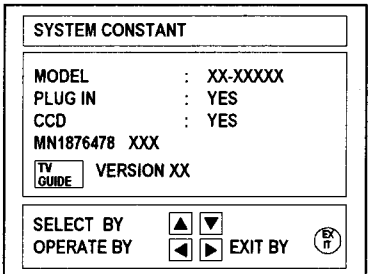
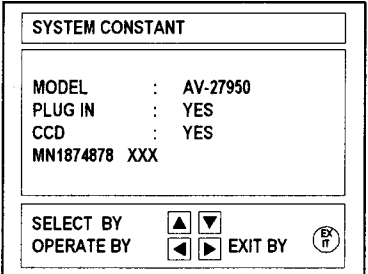
Procedure	Screen display						
(1) Power off Switch off the power and disconnect the power cord from the outlet.							
(2) Replace the memory IC Initial value must be entered into the new IC.							
(3) Power on Connect the power cord to the outlet and switch on the power.							
(4) System constant check and setting 1) Simultaneously press the DISPLAY key and VIDEO STATUS key of the remote control unit. 2) The SERVICE MENU screen of Fig.1 is displayed. 3) While the SERVICE MENU is displayed, again simultaneously press the DISPLAY and VIDEO STATUS keys to display the Fig.2 SYSTEM CONSTANT screen. 4) Refer to the SYSTEM CONSTANT table and check the setting items. Where these differ, select the setting item with the MENU UP/DOWN key and adjust the setting with the MENU LEFT/RIGHT keys. (The letters of the selected item are displayed in yellow.) 5) After adjusting, release the MENU LEFT/RIGHT key to store the setting value. 6) Press the EXIT key twice to return the normal screen. NOTE : <table border="1"> <thead> <tr> <th>Remote Control Unit [RM-C755 / RM-C752]</th><th>Remote Control Unit [RM-C888]</th></tr> </thead> <tbody> <tr> <td>DISPLAY key</td><td>OSD key</td></tr> <tr> <td>VIDEO STATUS key</td><td>STATUS key</td></tr> </tbody> </table>	Remote Control Unit [RM-C755 / RM-C752]	Remote Control Unit [RM-C888]	DISPLAY key	OSD key	VIDEO STATUS key	STATUS key	 Fig.1 [GUIDE PLUS + : Only AV-27980 / AV-27985]
Remote Control Unit [RM-C755 / RM-C752]	Remote Control Unit [RM-C888]						
DISPLAY key	OSD key						
VIDEO STATUS key	STATUS key						
(5) Receive channel setting Refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the receive channels (Channels Preset) as described.	 Fig.2 [The figures are about the model AV-27980 / AV-27985]						
(6) User settings Check the user setting items according to Table 2. Where these do not agree, refer to the OPERATING INSTRUCTIONS (USER'S GUIDE) and set the items as described.	 Fig.2 [The figures are about the model AV-27950]						
(7) SERVICE MENU setting Verify what to set in the SERVICE MENU, and set whatever is necessary. (Fig.1) Refer to the SERVICE ADJUSTMENT for setting.							

TABLE 1 (System Constant setting)
[AV-27950]

Setting item	Setting constant	Setting value
		AV-27950
MODEL		AV-27950
PLUG IN		YES
CCD		YES

[AV-27980 / AV-27985]

Setting item	Setting constant	Setting value	
		AV-27980	AV-27985
MODEL		AV-27980	AV-27985
PLUG IN		YES	YES
CCD		YES	YES

TABLE 2 (User setting)

Setting item	Setting value	Setting item	Setting value
1. Use remote controller keys			
POWER CHANNEL VOLUME TV/VIDEO CLOSED CAPTION HYPER SURROUND	OFF CH-02 Proper sound volume TV OFF(CC1/T1/BLACK) OFF	DISPLAY VIDEO STATUS SLEEP TIMER PIP SOURCE PIP POSITION	OFF STANDARD 0 CH-04 Lower left
2. Settings of MENU			
PICTURE ADJUST TINT COLOR PICTURE BRIGHT DETAIL NOTCH NOISE MUTING SET VIDEO STATUS	CENTER CENTER CENTER CENTER CENTER OFF ON ALL CENTER	INITIAL SETUP TV SPEAKER AUDIO OUT LANGUAGE CLOSED CAPTION TV GUIDE PLUS+ MENU [AV-27980 / AV-27985] TV GUIDE PLUS+ DEMO [AV-27980 / AV-27985] AUTO TUNER SET UP CHANNEL SUMMARY	ON FIX ENG CAPTION : CC1 TEXT : T1 BACKGROUND : BLACK Not to set Unnecessary to set Unnecessary to set Unnecessary to set
SOUND ADJUST BASS TREBLE BALANCE MTS CLOCK / TIMERS SET CLOCK ON/OFF TIMER SET LOCK CODE	CENTER CENTER CENTER STEREO Unnecessary to set NO Unnecessary to set		

REPLACEMENT OF CHIP COMPONENT

■ CAUTIONS

1. Avoid heating for more than 3 seconds.
2. Do not rub the electrodes and the resist parts of the pattern.
3. When removing a chip part, melt the solder adequately.
4. Do not reuse a chip part after removing it.

■ SOLDERING IRON


1. Use a high insulation soldering iron with a thin pointed end of it.
2. A 30w soldering iron is recommended for easily removing parts.

■ REPLACEMENT STEPS


1. How to remove Chip parts

◆ Resistors, capacitors, etc

- (1) As shown in the figure, push the part with tweezers and alternately melt the solder at each end.




- (2) Shift with tweezers and remove the chip part.




2. How to install Chip parts

◆ Resistors, capacitors, etc

- (1) Apply solder to the pattern as indicated in the figure.




- (2) Grasp the chip part with tweezers and place it on the solder. Then heat and melt the solder at both ends of the chip part.




◆ Transistors, diodes, variable resistors, etc

- (1) Apply extra solder to each lead.




- (2) As shown in the figure, push the part with tweezers and alternately melt the solder at each lead. Shift and remove the chip part.




◆ Transistors, diodes, variable resistors, etc

- (1) Apply solder to the pattern as indicated in the figure.
- (2) Grasp the chip part with tweezers and place it on the solder.
- (3) First solder lead A as indicated in the figure.



- (4) Then solder leads B and C.



Note : After removing the part, remove remaining solder from the pattern.

SERVICE ADJUSTMENTS

ADJUSTMENT PREPARATION:

1. You can make the necessary adjustments for this unit with either the remote control unit or with the adjustment equipment and parts as given below.
2. Adjustment with the remote control unit is made on the basis of the initial setting values, however, the new setting values which set the screen to its optimum condition may differ from the initial settings.
3. Turn on the power for the set and test equipment before use, and start the adjustment procedures after waiting at least 30 minutes.
4. Make sure that AC power is turned on correctly.
5. Unless otherwise specified, prepare the most suitable reception or input signal for adjustment.
6. Never touch any adjustment parts, which are not specified in the list for this adjustment-variable resistors, transformers, condensers, etc.
7. Presetting before adjustment.

Unless otherwise specified in the adjustment instructions, preset the following functions with the remote control unit.

(1) VIDEO STATUS	STANDARD
(2) NOTCH	OFF
(3) HYPER SURROUND	OFF
(4) BASS, TREBLE, BALANCE	CENTER


MEASURING INSTRUMENT

1. DC voltmeter(or digital voltmeter)
2. Oscilloscope
3. Signal generator (Pattern generator) [NTSC]
4. Remote control unit
5. TV audio multiplex signal generator
6. Frequency counter

ADJUSTMENT ITEMS


- Check of B1 POWER SUPPLY
- IF VCO adjustment
- RF AGC adjustment
- FOCUS adjustment
- DEFLECTION adjustment
 - V. CENTER, V. SIZE, V. POSITION adjustment
 - H. POSITION adjustment
- VIDEO / CHROMA adjustment
 - WHITE BALANCE (Low light) adjustment
 - WHITE BALANCE (High light) adjustment
 - SUB BRIGHT adjustment
 - SUB CONTRAST adjustment
 - SUB COLOR adjustment
 - SUB TINT adjustment
- PIP circuit adjustment
 - WHITE BALANCE adjustment
 - DISPLAY POSITION adjustment
 - SUB CONTRAST adjustment
 - SUB COLOR adjustment
 - SUB TINT adjustment
- MTS circuit adjustment
 - INPUT LEVEL adjustment
 - STEREO VCO adjustment
 - SAP VCO adjustment
 - FILTER check
 - SEPARATION adjustment
- GUIDE PLUS + circuit adjustment
 - GUIDE PLUS + SCREEN POSITION adjustment

ADJUSTMENT LOCATIONS

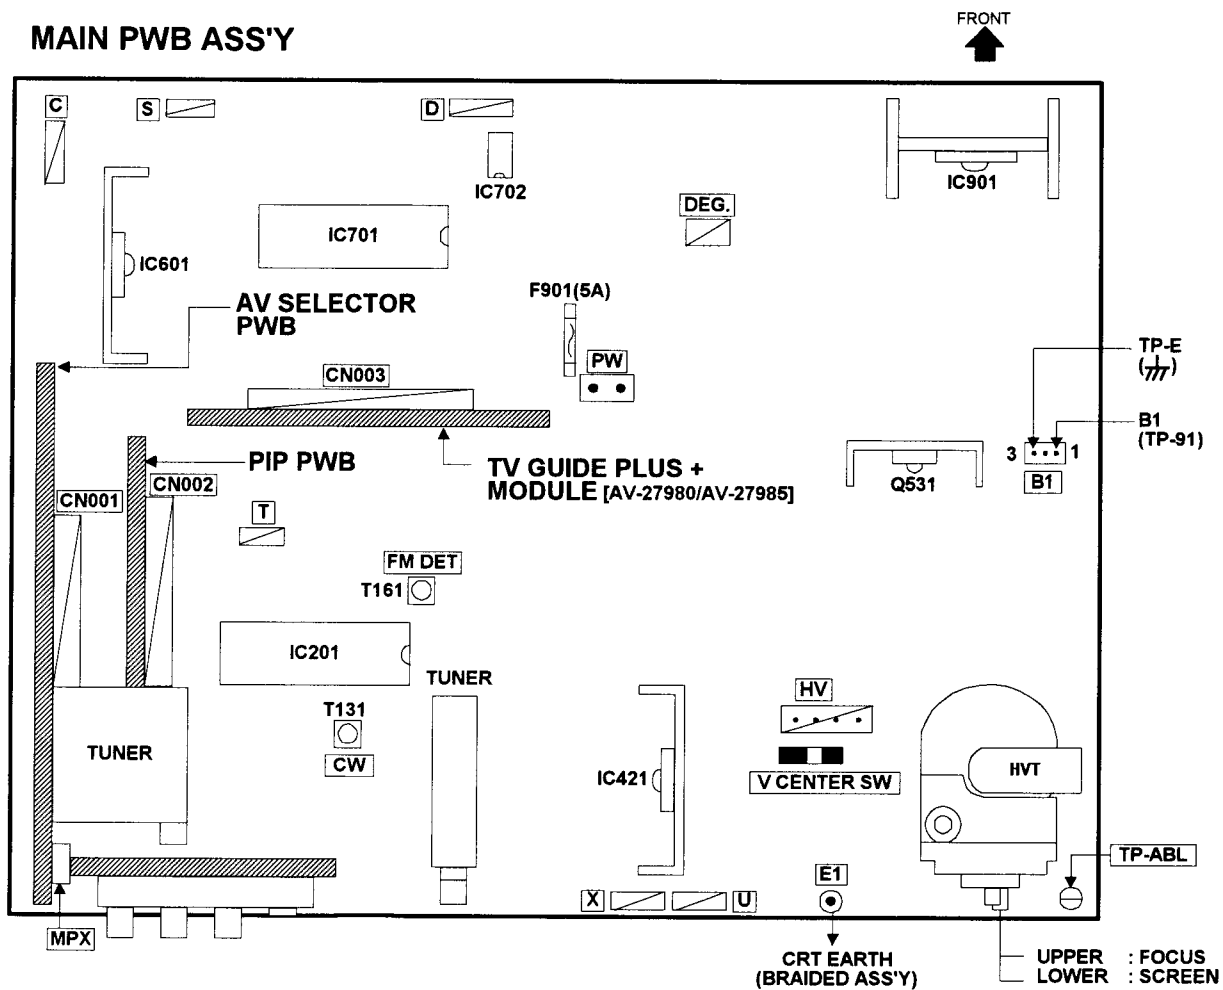


CRT SOCKET PWB ASS'Y
(SOLDER SIDE)

TOP ↑

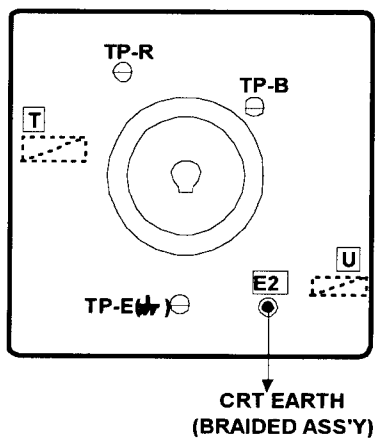

FRONT CONTROL PWB ASS'Y

FRONT ↑

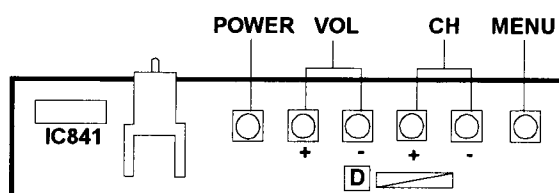

BASIC OPERATION OF SERVICE MENU

1. Operate the SERVICE MENU with the REMOTE CONTROL UNIT.

2. In general, basic setting (adjustments) items or verifications are performed in the SERVICE MENU.

- (1) PICTURE This set the setting values (adjustment values) of the VIDEO/CHROMA and DEFLECTION circuits.
- (2) SOUND This set the setting values (adjustment values) of the AUDIO circuit.
- (3) THEATER This is used when the THEATER MODE is adjusted.
- (4) OTHERS This is used when the OTHERS MODE is adjusted.
- (5) GUIDE PLUS + This sets the setting values (adjustment values) of the TV GUIDE PLUS + circuit.

[AV-27980 / AV-27985]

- (6) PIP This set the setting values (adjustment values) of the PICTURE-IN-PICTURE circuit.
(PIP is means as Picture in Picture)
- (7) LOW LIGHT This sets the setting values (adjustment values) of the WHITE BALANCE circuit.
- (8) HIGH LIGHT This sets the setting values (adjustment values) of the WHITE BALANCE circuit.
- (9) RF AFC 1 This is used when the RF AFC 1 MODE is verified. **[Do not adjust]**
- (10) RF AFC 2 This is used when the RF AFC 2 MODE is verified. **[Do not adjust]**
- (11) VCO (CW) This is used when the IF VCO is adjusted.
- (12) I²C BUS CTRL This is used when ON/OFF of the I²C BUS CTRL is set. **[Fixed ON]**

3. Basic Operations of the SERVICE MENU

(1) How to enter the SERVICE MENU.

Press the DISPLAY key and VIDEO STATUS key of the remote control unit at the same time to enter the SERVICE MENU screen ① shown in figure page later.

(2) SERVICE MENU screen selection

Press the UP / DOWN key of the MENU to select any of the following items.

(The letters of the selected items are displayed in yellow.)

- PICTURE
- SOUND
- THEATER
- OTHERS
- PIP
- GUIDE PLUS +
- LOW LIGHT
- HIGH LIGHT
- RF AFC 1
- RF AFC 2
- VCO (CW)
- I²C BUS CTRL

(3) Enter the any setting (adjustment) mode

● PICTURE, SOUND and OTHERS mode

- 1) If select any of PICTURE, SOUND or OTHERS items, and the LEFT / RIGHT key is pressed from SERVICE MENU (MAIN MENU), the screen ② will be displayed as shown in figure page later.
- 2) Then the UP / DOWN key is pressed, the PICTURE mode screen ③ or the SOUND mode screen ④ or the OTHERS mode screen ⑤ is displayed, and the PICTURE, SOUND or OTHERS setting can be performed.

● PIP mode


- 1) If select the PIP item, and the LEFT / RIGHT key is pressed from SERVICE MENU (MAIN MENU), the screen ⑥ will be displayed as shown in figure page later.
- 2) Then UP / DOWN key is pressed, the PIP mode screen ⑦ is displayed, and the PIP setting can be performed.

● GUIDE PLUS + mode

- 1) If select the GUIDE PLUS + item, and the LEFT / RIGHT key is pressed from SERVICE MENU (MAIN MENU), the screen ⑧ will be displayed as shown in figure page later.
- 2) Then UP / DOWN key is pressed, the GUIDE PLUS + mode screen ⑨ is displayed, and the GUIDE PLUS + setting can be performed.


● THEATER, LOW LIGHT, HIGH LIGHT, RF AFC1, RF AFC2, VCO (CW) and I²C BUS CTRL mode

- 1) If select any of THEATER / LOW LIGHT / HIGH LIGHT / RF AFC 1 / RF AFC 2 / VCO (CW) / I²C BUS CTRL items, and the LEFT / RIGHT key is pressed from SERVICE MENU (MAIN MENU), the screens ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ will be displayed as shown in figure page later.
- 2) Then the settings or verifications can be performed.

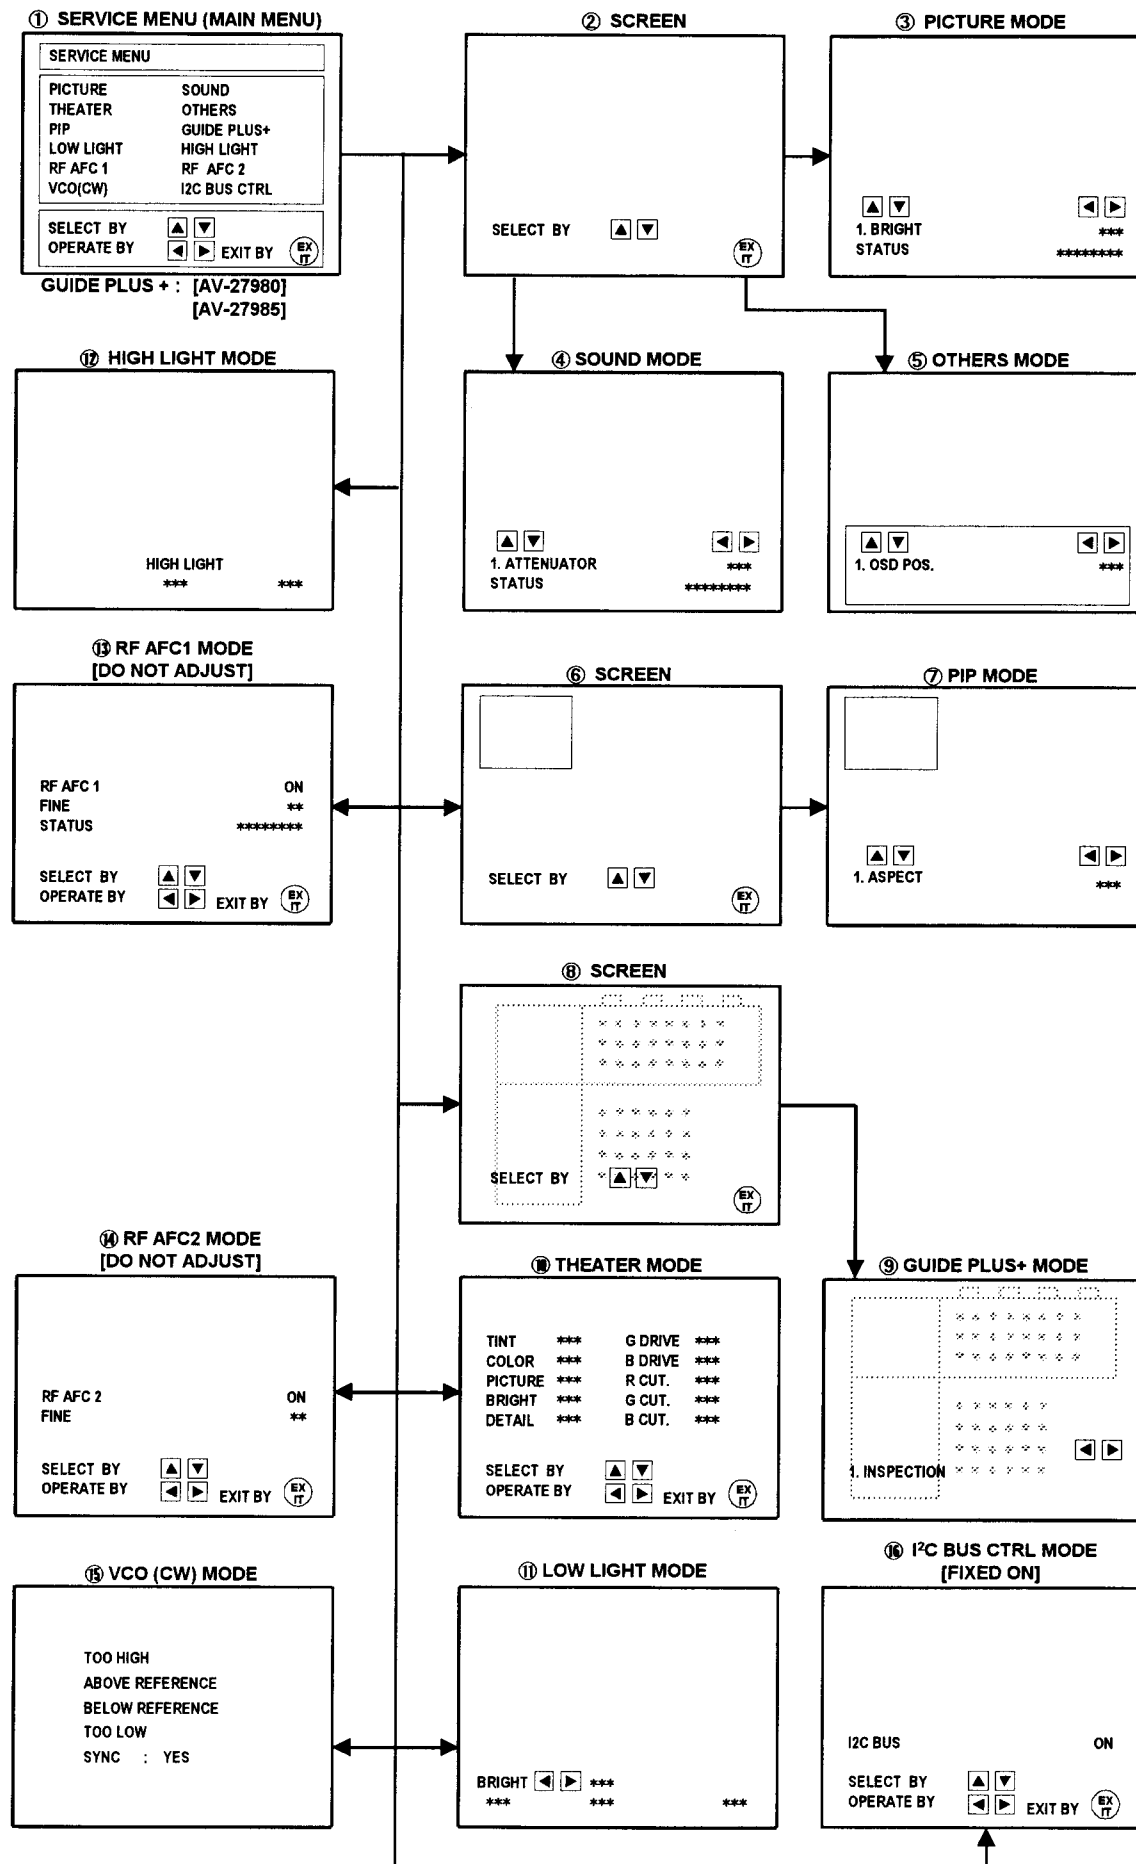

(3) Setting method

- 1) UP / DOWN key of the MENU
Select the SETTING ITEM.
- 2) LEFT / RIGHT key of the MENU
Setting (adjust) the SETTING VALUE of the SETTING ITEM.
When the key is released the SETTING VALUE will be stored (memorized).
- 3) EXIT key
Returns to the previous screen.

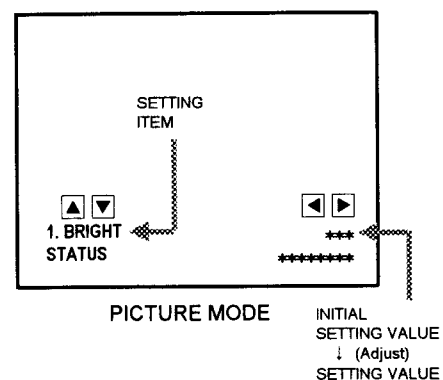


(4) Releasing SERVICE MENU


- 1) After returning to the SERVICE MENU upon completion of the setting (adjustment) work, press the EXIT key again.

★ The settings for LOW LIGHT and HIGH LIGHT are described in the WHITE BALANCE page of ADJUSTMENT.



★ The setting for VCO (CW) are described in the IF VCO page of ADJUSTMENT.

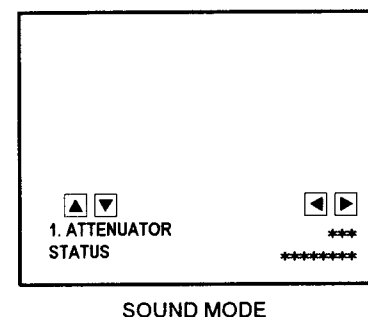


(The letters of the selected items are displayed in yellow.)

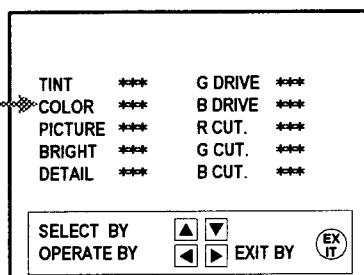

THEATER MODE

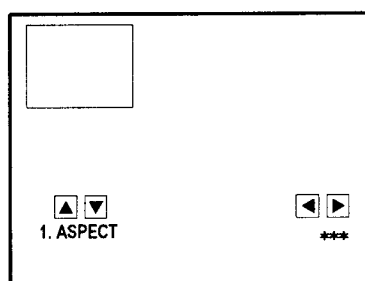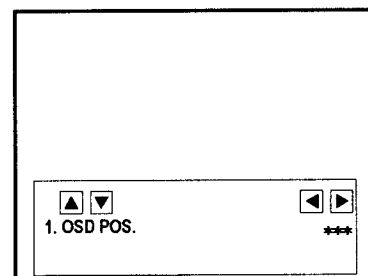

PIP MODE

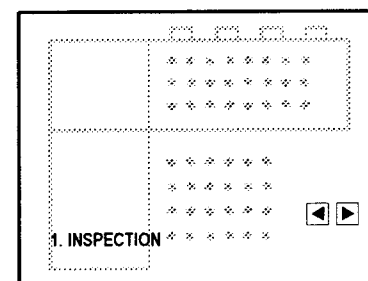

GUIDE PLUS + MODE

INITIAL SETTING VALUE OF SERVICE MENU

1. Adjustment of the SERVICE MENU is made on the basis of the initial setting values; however, the new setting values which set the screen in its optimum condition may differ from the initial setting.
2. Do not change the initial Setting Values of the Setting (Adjustment) items not listed in "ADJUSTMENT".

● PICTURE MODE

- ◇ The four setting items in the video mode No.8 EXT BRI., No.9 EXT PIC., No.12 EXT TINT and No.13 EXT COLOR are linked to the items in the TV MODE No.1 BRIGHT, No.2 PICTURE, No.6 TINT and No.7 COLOR, respectively. When the setting items in the TV mode are adjusted, the values in the setting items in the video mode are revised automatically to the same values in the TV mode. (The initial setting values given in () are off-set values.)
- ◇ When the four items (No.8, 9, 12 and 13) are adjusted in the video mode, the setting values in each item are revised independently.

No.	Setting (Adjustment) item	Variable range	Initial setting value
1.	BRIGHT	0~127	64
2.	PICTURE	0~127	75
3.	WPS (WHITE PEAK SUPPRESSOR)	0 / 1	1
4.	TV DETAIL	0~63	40
5.	TV BPF (TV B.P.FILTER)	0 / 1	1
6.	TINT	0~127	64
7.	COLOR	0~127	52
8.	EXT BRIGHT	±25	(+1)
9.	EXT PICT.	±25	(±0)
10.	EXT DETAIL	0~63	38
11.	EXT BPF (EXT B.P.FILTER)	0 / 1	1
12.	EXT TINT	±25	(+2)
13.	EXT COLOR	±25	(+3)
14.	V SIZE	0~63	32
15.	V CENTER	0~7	0
16.	H POSITION	0~31	22
17.	H AFC	0 / 1	0
18.	BLANKING	0 / 1	0
19.	RF AGC	0~63	35
20.	PIF VCO	0~127	64

● SOUND MODE

No.	Setting (Adjustment) item	Variable range	Initial setting value
1.	ATTENUATOR	0~63	50
2.	BALANCE	0~63	32
3.	NOISE DET.	0 / 1	1
4.	IN LEVEL (INPUT LEVEL)	0~63	27
5.	FH MONITOR	0 / 1	0
6.	STEREO VCO	0~63	23
7.	PILOT CAN. (PILOT CANCELER)	0 / 1	0
8.	FILTER	0~63	30
9.	LOW SEP. (LOW SEPARATION)	0~63	28
10.	HI SEP. (HIGH SEPARATION)	0~63	19
11.	5FH MON. (5FH MONITOR)	0 / 1	0
12.	SAP VCO	0~63	27
13.	IN GAIN (INPUT GAIN)	0 / 1	0
14.	FIL.OFFSET	0~10	0

● THEATER MODE

Setting (Adjustment) item	Variable range	Initial setting value
TINT	±20	±00
COLOR	±20	-2
PICTURE	±20	-15
BRIGHT	±20	±00
DETAIL	±15	-3
G DRIVE	-99~+50	-25
B DRIVE	-99~+50	-72
R CUT. (R CUTOFF)	±10	±00
G CUT. (G CUTOFF)	±10	±00
B CUT. (B CUTOFF)	±10	±00

● OTHERS MODE

No.	Setting (Adjustment) item	Variable range	Initial setting value
1.	OSD POS.	0~7	0
2.	CCD POS. (CLOSED CAPTION DECODER POS.)	0~15	2
3.	EOSEL	0 / 1	0
4.	F1 FIELD	0 / 1	0
5.	F1 LINE21	0~15	8
6.	F2 LINE21	0~15	8
7.	OSD STAB1	0 / 1	0
8.	SYNC SEP.	0 / 1	1

● PIP MODE

No.	Setting (Adjustment) item	Variable range	Initial setting value
1.	ASPECT	0~31	23
2.	V POSITION	0~127	20
3.	LOWER POS.	0~127	61
4.	H POSITION	0~127	40
5.	RIGHT POS.	0~127	81
6.	V AREA	0~3	2
7.	H AREA	0~3	2
8.	CLAMP POS.	0~3	1
9.	FRAME	0~3	3
10.	Y/C DELAY	0~7	4
11.	TINT	0~127	23
12.	COLOR	0~127	68
13.	CONTRAST	0~127	61
14.	G GAIN	0~127	80
15.	B GAIN	0~127	90

● GUIDE PLUS+ MODE [AV-27980 / AV-27985]

No.	Setting (Adjustment) item	Variable range	Initial setting value
1.	INSPECTION		
2.	MAIN H POS	0~255	31
3.	MAIN V POS	0~255	36
4.	FRAME SIZE	0~13	9
5.	PIP ASPECT	0~31	20
6.	PIP H POS.	0~127	32
7.	PIP V POS.	0~127	25
8.	INIT. DELAY	0~255	17
9.	INITIALIZE		

AV-27950
 AV-27980
 AV-27985

● LOW LIGHT MODE

Setting (Adjustment) item	Variable range	Initial setting value
R CUTOFF	0~255	20
G CUTOFF	0~255	20
B CUTOFF	0~255	20

● HIGH LIGHT MODE

Setting (Adjustment) item	Variable range	Initial setting value
G DRIVE	0~255	128
B DRIVE	0~255	128

● RF AFC 1 MODE

Setting (Adjustment) item	Variable range	Initial setting value
RF AFC 1 FINE	ON/OFF -77~+77	ON (DO NOT ± × × ADJUST)

● RF AFC 2 MODE

Setting (Adjustment) item	Variable range	Initial setting value
RF AFC 2 FINE	ON/OFF -77~+77	ON (DO NOT ± × × ADJUST)

● I2C BUS CTRL MODE

Setting (Adjustment) item	Variable range	Initial setting value
I2C BUS	ON/OFF	[Fixed ON]

■ ADJUSTMENTS

B1 POWER SUPPLY

Item	Measuring instrument	Test point	Adjustment part	Description
Check of B1 POWER SUPPLY	DC Voltmeter	B1 ([B1] Connector [1] pin) (TP-91) TP-E(⚡) ([B1] Connector [3] pin)		1. Receive a black-and-white signal. (Color off) 2. Connect the DC Voltmeter to [B1] connector [1] pin (TP-91) and TP-E(⚡) (B1 connector [3] pin). 3. Confirm that the voltage is $DC134V \pm 2V$.

ADJUSTMENT OF IF. VCO

Item	Measuring instrument	Test point	Adjustment part	Description
IF VCO adjustment	Signal generator		CW TRANSF. (T131) [VCO(CW)] MODE	- Under normal conditions, no adjustment is required. 1. Receive a NTSC broadcast. (Use channels without offset frequency). 2. Select the VCO (CW) mode from the SERVICE MENU. 3. Confirm the color change (yellow) from "TOO HIGH" to "TOO LOW" by CW TRANSF. and "SYNC : YES" being shown on the screen. Then, adjust CW TRANSF. until "BELOW REFERENCE" mark turns yellow and confirm again " SYNC : YES" being shown on the screen.

TOO HIGH
ABOVE REFERENCE
BELOW REFERENCE ← YELLOW
TOO LOW
SYNC : YES


ADJUSTMENT OF RF AGC

Item	Measuring instrument	Test point	Adjustment part	Description
RF. AGC adjustment			No.19 RF AGC	1. Receive a broadcast. 2. Select "No.19 RF AGC" of the PICTURE MODE. 3. Press the MUTE key and turn off color. 4. With the MENU LEFT key, get noise in the screen picture. (0 side of setting value) 5. Press the MENU RIGHT key and stop when noise disappears from the screen. 6. Change to other channels and make sure that there is no irregularity. 7. Press the MUTE key and get color out.

ADJUSTMENT OF FOCUS

Item	Measuring instrument	Test point	Adjustment part	Description
FOCUS adjustment	Signal generator		FOCUS VR [built-in HVT]	1. Receive a crosshatch signal. 2. While looking at the screen, adjust FOCUS VR so that the vertical and horizontal lines will be clear and in fine detail. 3. Make sure that the picture is in focus even when the screen gets darkened.


ADJUSTMENT OF DEFLECTION CIRCUIT

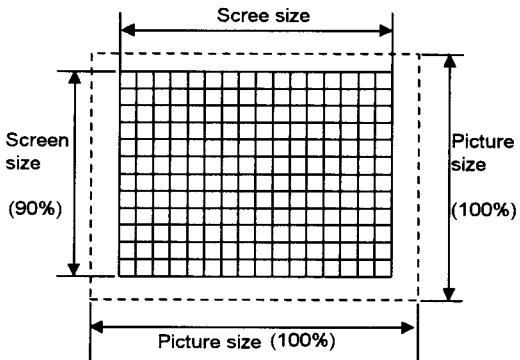Item	Measuring instrument	Test point	Adjustment part	Description
V.CENTER, V.SIZE and V.POSITION adjustment	Signal generator		No.14 V SIZE No.15 V CENTER V.CENTER SW (S1421)	1. Receive a crosshatch signal. 2. Make sure that the "No.15 V CENTER" of the PICTURE SERVICE MODE is 0. 3. Use the LEFT/RIGHT keys of the MENU to set the initial setting value for the No.14 V SIZE. 4. Adjust the vertical SCREEN size to 90% with the No.14 V SIZE and S1421 (V.CENTER SW).
				
H.POSITION adjustment	Signal generator		No.16 H POSITION	1. Receive a crosshatch signal. 2. Select the "No.16 H POSITION" of the PICTURE MODE. 3. Set the initial setting value of the "No.16 H POSITION" with the LEFT/RIGHT key of the MENU. 4. Adjust the "No.16 H POSITION" until the screen will be horizontally centered.


ADJUSTMENT OF VIDEO / CHROMA CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
WHITE BALANCE (Low Light) adjustment	Signal generator		BRIGHT R CUTOFF G CUTOFF B CUTOFF SCREEN VR	1. Receive a black-and-white signal. (Color off) 2. Select the [LOW LIGHT] MODE from the SERVICE MENU. 3. Set the initial setting value of "BRIGHT" with the LEFT/RIGHT key of the remote control unit. 4. Set the initial setting value of "R CUTOFF", "G CUTOFF" and "B CUTOFF" with the ④ to ⑨ keys of the remote control unit. 5. Display a single horizontal line by pressing the ① key of the remote control unit. 6. Turn the screen VR all the way to the left. 7. Turn the screen VR gradually to the right from the left until either one of the red, blue or green colors appears faintly. 8. Adjust the two colors which did not appear until the single horizontal line that is displayed becomes white using the ④ to ⑨ keys of the remote control unit. 9. Turn the screen VR until the single horizontal line is displayed faintly. 10. Press the ② key to return to the regular screen. * The ③ EXIT key is the cancel key for the WHITE BALANCE.
WHITE BALANCE (High Light) adjustment	Signal generator		G DRIVE B DRIVE	1. Receive a black-and-white signal. (Color off) 2. Select the [HIGH LIGHT] MODE in the SERVICE MENU. 3. Set the initial setting value of "G DRIVE" and "B DRIVE" with the ⑤, ⑥, ⑧ and ⑨ keys of the remote control unit. 4. Adjust the screen until it becomes white using the ⑤, ⑥, ⑧ and ⑨ keys of the remote control unit. * The ③ EXIT key is the cancel key for the WHITE BALANCE.


[LOW LIGHT] MODE

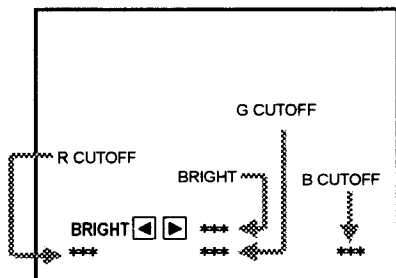

Remote Control Unit

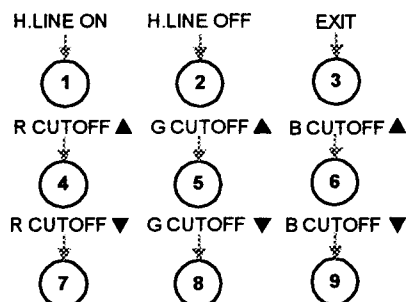

[HIGH LIGHT] MODE

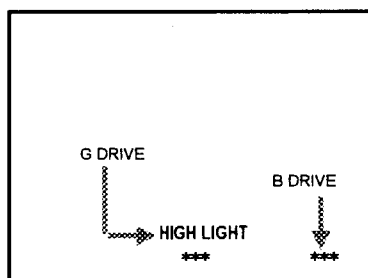

Remote Control Unit

- ①key : H.LINE ON
- ②key : H.LINE OFF
- ③key : EXIT
- ⑤key : G DRIVE ▲
- ⑥key : B DRIVE ▲
- ⑧key : G DRIVE ▼
- ⑨key : B DRIVE ▼

Item	Measuring instrument	Test point	Adjustment part	Description
SUB BRIGHT adjustment			No.1 BRIGHT	1. Receive a broadcast. 2. Select "No.1 BRIGHT" of the PICTURE MODE. 3. Set the initial setting value of the "No.1 BRIGHT" with the LEFT/RIGHT key of the MENU. 4. If the brightness is not the best with the initial setting value, make fine adjustment of the "No.1 BRIGHT" until you get the optimum brightness.
SUB CONTRAST adjustment			No.2 PICTURE	1. Receive a broadcast. 2. Select "No.2 PICTURE" of the PICTURE MODE. 3. Set the initial setting value of the "No.2 PICTURE" with the LEFT/RIGHT key of the MENU. 4. If the contrast is not the best with the initial setting value, make fine adjustment of the "No.2 PICTURE" until you get the optimum contrast.
SUB COLOR adjustment			No.7 COLOR	1. Receive a broadcast. 2. Select "No.7 COLOR" of the PICTURE MODE. 3. Set the initial setting value of the "No.7 COLOR" with the LEFT/RIGHT key of the MENU. 4. If the color is not the best with the initial setting value, make fine adjustment of the "No.7 COLOR" until you get the optimum color.
SUB TINT adjustment			No.6 TINT	1. Receive a broadcast. 2. Select "No.6 TINT" of the PICTURE MODE. 3. Set the initial setting value of the "No.6 TINT" with the LEFT/RIGHT key of the MENU. 4. If the tint is not the best with the initial setting value, make fine adjustment of the "No.6 TINT" until you get the optimum tint.

ADJUSTMENT OF PIP CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
PIP WHITE BALANCE adjustment	Signal generator		No.14 G GAIN No.15 B GAIN	1. Receive a black-and-white signal.(Color off) 2. Select the "No.14 G GAIN, No.15 B GAIN" of the PIP SERVICE MODE. 3. Set the corresponding initial setting values with the LEFT/RIGHT key of the menu. 4. Adjust the "No.14 G GAIN, No.15 B GAIN" until the screen becomes white.
PIP DISPLAY POSITION adjustment	Signal generator		No.2 V POSITION No.3 LOWER POS. No.4 H POSITION No.5 RIGHT POS.	1. Receive a black-and-white signal.(Color off) 2. Select the "No.2 V POSITION" of the PIP SERVICE MODE. 3. Set the initial setting value of the No.2 V POSITION" with the LEFT/RIGHT key of the menu. 4. Adjust the "No.2 V POSITION" so that the position of the PIP screen edge of upper will be at X1 as shown. 5. Adjust the corresponding modes of "No.3, No.4, No.5" with the same steps as 2~4 above.

PIP screen

PIP SERVICE MODE No.	Item	PIP Setting position
		Approx. (mm)
No.2	UPPER POSITION (X1)	30
No.3	LOWER POSITION (X2)	30
No.4	H POSITION (Y1)	40
No.5	RIGHT POSITION (Y2)	40

Item	Measuring instrument	Test point	Adjustment part	Description
PIP SUB CONTRAST adjustment			No.13 CONTRAST	1. Receive a broadcast. 2. Select "No.13 CONTRAST" of the PIP SERVICE MODE. 3. Set the initial setting value of the "No.13 CONTRAST" with the LEFT/RIGHT key of the menu. 4. If the contrast is not the best with the initial setting value, make fine adjustment of the "No.13 CONTRAST" until you get the optimum contrast.
PIP SUB COLOR adjustment			No.12 COLOR	1. Receive a broadcast. 2. Select "No.12 COLOR" of the PIP SERVICE MODE. 3. Set the initial setting value of the "No.12 COLOR" with the LEFT/RIGHT key of the menu. 4. If the color is not the best with the initial setting value, make fine adjustment of the "No.12 COLOR" until you get the optimum color.
PIP SUB TINT adjustment			No.11 TINT	1. Receive a broadcast. 2. Select "No.11 TINT" of the PIP SERVICE MODE. 3. Set the initial setting value of the "No.11 TINT" with the LEFT/RIGHT key of the menu. 4. If the tint is not the best with the initial setting value, make fine adjustment of the "No.11 TINT" until you get the optimum tint.

ADJUSTMENT OF MTS CIRCUIT

Item	Measuring instrument	Test point	Adjustment part	Description
MTS INPUT LEVEL check			No.4 IN LEVEL	1. Select the "No.4 IN LEVEL" of the SOUND MODE. 2. Verify that the "No.4 IN LEVEL" is set at its initial setting value.
MTS STEREO VCO adjustment	Signal generator Frequency counter	[MPX] Connector [2] pin RTV [AV SELECTOR PWB]	No.5 FH MONITOR No.6 STEREO VCO	1. Receive a RF signal (nonmodulated sound signal) from the antenna terminal. 2. Select the "No.5 FH MONITOR" of SOUND MODE, and change the setting value from 0 to 1. 3. Connect the Frequency Counter to pin [2] of [MPX] connector. 4. Select the "No.6 STEREO VCO". 5. Set the initial setting value of the "No.6 STEREO VCO" with the LEFT/RIGHT key of the menu. 6. Adjust the "No.6 STEREO VCO" so that the Frequency Counter will display $15.73\text{kHz} \pm 0.1\text{kHz}$. 7. Select the "No.5 FH MONITOR" of the SOUND MODE, and reset the setting value from 1 to 0.

Item	Measuring instrument	Test point	Adjustment part	Description
MTS SAP VCO adjustment	Signal generator	[MPX] Connector [4] pin SDA [3] pin GND [2] pin RTV [AV SELECTOR PWB]	No.11 5FH MON. No.12 SAP VCO	1. Receive a RF signal (non-modulated sound signal) from the antenna terminal. 2. Connect between pin [4] of [MPX] connector and GND (Pin [3] of [MPX] connector) through 1MΩ Resistor. 3. Select the "No.11 5FH MON." of the SOUND MODE, and reset the1 setting value from 0 to 1. 4. Connect the Frequency counter to pin [2] (R.OUT) of [MPX] connector. 5. Select the "No.12 SAP VCO". 6. Set the initial setting value of "No.12 SAP VCO" with the LEFT/RIGHT key of the menu. 7. Adjust the "No.12 SAP VCO" so that the Frequency Counter will display 78.67kHz$\pm$0.5kHz. 8. Select the "No.11 5FH MON." of the SOUND MODE, and reset the setting value from 1 to 0.
MTS FILTER check			No.8 FILTER	1. Select the "No.8 FILTER" of the SOUND MODE. 2. Verify that the "No.8 FILTER" is set at its initial setting value.
MTS SEPARATION adjustment	TV audio multiplex signal generator Oscilloscope	[MPX] Connector [1] pin LTV [2] pin RTV [AV SELECTOR PWB]	No.9 LOW SEP. No.10 HI SEP.	1. Input a stereo L signal (300Hz) from the TV audio multiplex signal generator to the antenna terminal. 2. Connect an oscilloscope to pin [1] (L OUT) of [MPX] connector, and display one cycle portion of the 300Hz signal. 3. Change the connection of the oscilloscope to pin [2] (R OUT) of [MPX] connector, and enlarge the voltage axis. 4. Select the "No.9 LOW SEP." of the SOUND MODE. 5. Set the initial setting value of the "No.9 LOW SEP." with the LEFT/RIGHT key of the menu. 6. Adjust the "No.9 LOW SEP." so that the stroke element of the 300Hz signal will become minimum. 7. Change the signal to 3kHz, and similarly adjust the "No.10 HI SEP."

L-Channel signal waveform


R-Channel crosstalk portion

1 cycle

Minimum

ADJUSTMENT OF GUIDE PLUS+ MODE [AV-27980 / AV-27985]

Item	Measuring instrument	Test point	Adjustment part	Description
GUIDE PLUS + SCREEN POSITION adjustment	Signal generator		No.6 PIP H POS.	1. Receive a black-and-white signal. (Color off) 2. Select the "No.6 PIP H POS." of the GUIDE PLUS+ MODE. 3. Set the initial setting value of the "No.6 PIP H POS." with the LEFT/RIGHT key of the MENU. 4. Adjust the "No.6 PIP H POS." so that the PIP screen comes into the position in the screen window of the GUIDE PLUS+. 5. Before exiting from the GUIDE PLUS + MODE, always select the "No.9 INITIALIZE" and press the LEFT/RIGHT key. (The screen will be turned into black and the word "INITIALIZE" will flash for about 10 seconds.) When the "No.9 INITIALIZE" is displayed on the screen again, exit from the GUIDE PLUS+ MODE.

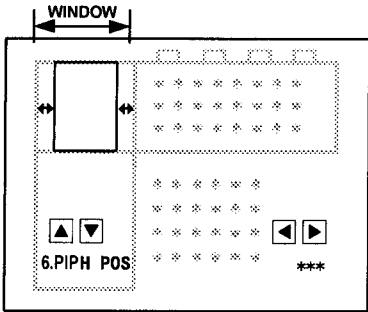

HOW TO CHECK THE HIGH VOLTAGE HOLD DOWN CIRCUIT

1. HIGH VOLTAGE HOLD DOWN CIRCUIT

After repairing the high voltage hold down circuit shown in Fig. 1.
This circuit shall be checked to operate correctly.

2. CHECKING OF THE HIGH VOLTAGE HOLD DOWN CIRCUIT

- (1) Turn the POWER SW ON.
- (2) As shown in Fig.2, set the resistor (between [X] connector [1] & [3]).
- (3) Make sure that the screen picture disappears.
- (4) Temporarily unplug the power cord.
- (5) Remove the resistor (between [X] connector [1] & [3]).
- (6) Again plug the power cord, make sure that the normal picture is displayed on the screen.

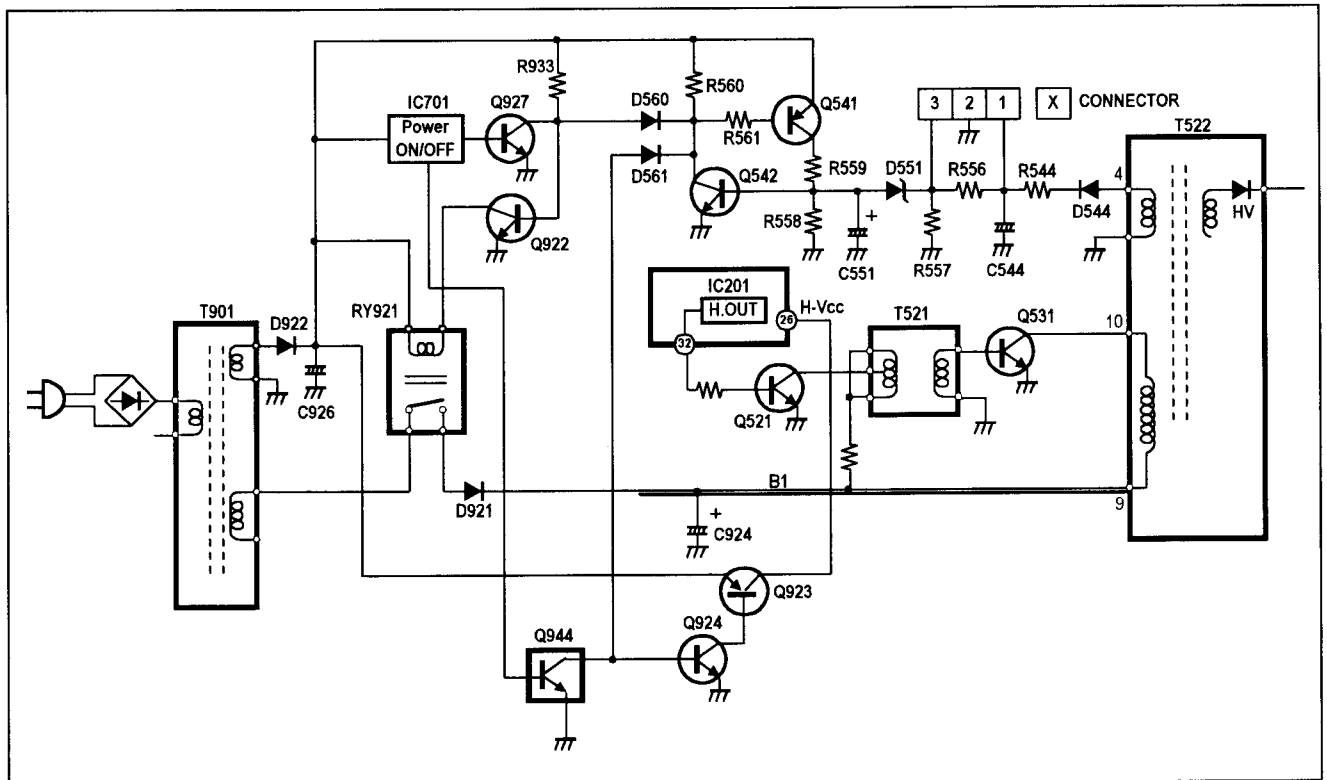


Fig.1

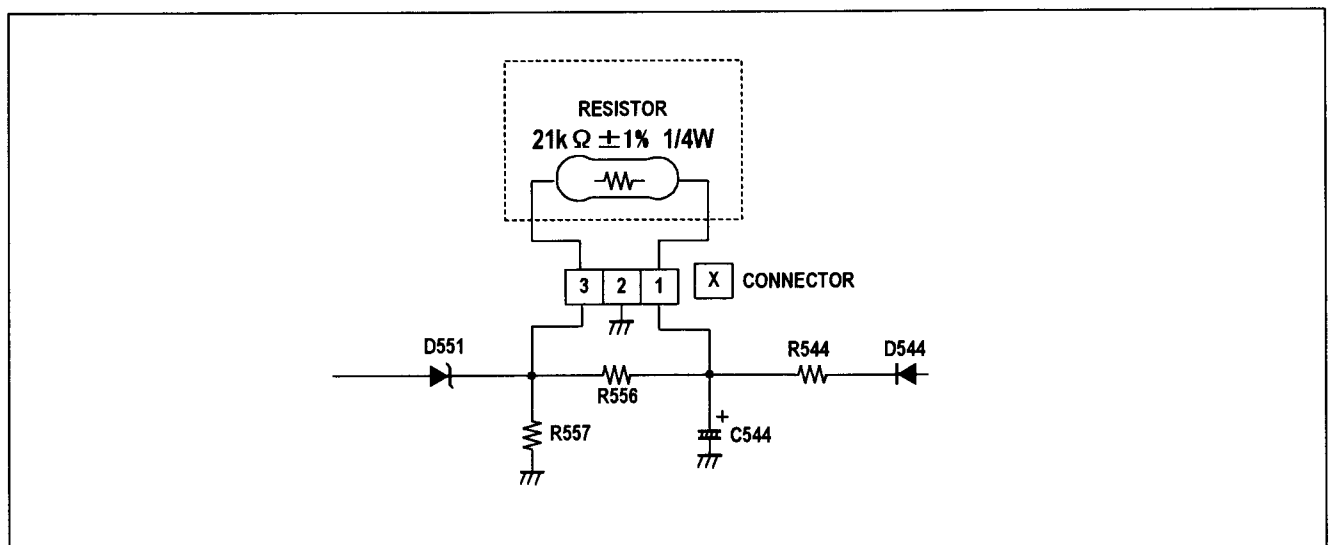


Fig.2

AV-27950
AV-27980
AV-27985

AV-27950 (US&CA)

AV-27980 (US&CA)

AV-27985 (US&CA)

AV-27950

AV-27980

AV-27985

STANDARD CIRCUIT DIAGRAM

NOTE ON USING CIRCUIT DIAGRAMS

1.SAFETY

The components identified by the Δ symbol and shading are critical for safety. For continued safety replace safety critical components only with manufactures recommended parts.

2.SPECIFIED VOLTAGE AND WAVEFORM VALUES

The voltage and waveform values have been measured under the following conditions.

- (1)Input signal : Color bar signal
- (2)Setting positions of each knob/button and variable resistor : Original setting position when shipped
- (3)Internal resistance of tester : DC 20k Ω /V
- (4)Oscilloscope sweeping time : H $\Rightarrow$ 20 μ S/div
: V $\Rightarrow$ 5mS/div
: Others $\Rightarrow$ Sweeping time is specified
- (5)Voltage values : All DC voltage values

* Since the voltage values of signal circuit vary to some extent according to adjustments, use them as reference values.

3.INDICATION OF PARTS SYMBOL [EXAMPLE]

- In the PW board : R1209 $\rightarrow$ R209

4.INDICATIONS ON THE CIRCUIT DIAGRAM

(1)Resistors

●Resistance value

- No unit : [Ω]
- K : [K Ω]
- M : [M Ω]

●Rated allowable power

- No indication : 1/10 [W]
- Others : As specified

●Type

- No indication : Carbon resistor
- OMR : Oxide metal film resistor
- MFR : Metal film resistor
- MPR : Metal plate resistor
- UNFR : Uninflammable resistor
- FR : Fusible resistor

*Composition resistor 1/2 [W] is specified as 1/2S or Comp.

(2)Capacitors

●Capacitance value

- 1 or higher : [pF]
- less than 1 : [μ F]

●Withstand voltage

- No indication : DC50[V]
- Others : DC withstand voltage [V]
- AC indicated : AC withstand voltage [V]

*Electrolytic Capacitors

47/50[Example]:Capacitance value [μ F]/withstand voltage[V]




●Type

- No indication : Ceramic capacitor
- MY : Mylar capacitor
- MM : Metalized mylar capacitor
- PP : Polypropylene capacitor
- MPP : Metalized polypropylene capacitor
- MF : Metalized film capacitor
- TF : Thin film capacitor
- BP : Bipolar electrolytic capacitor
- TAN : Tantalum capacitor

(3)Coils

- No unit : [μ H]
- Others : As specified

(4)Power Supply

-  : B1
-  : B2(12V)
-  : 9V
-  : 5V

*Respective voltage values are indicated

(5)Test point

-  : Test point
-  : Only test point display

(6)Connecting method

-  : Connector
-  : Wrapping or soldering
-  : Receptacle

(7)Ground symbol

-  : LIVE side ground
-  : ISOLATED(NEUTRAL) side ground
-  : EARTH ground
-  : DIGITAL ground

5.NOTE FOR REPAIRING SERVICE

This model's power circuit is partly different in the GND. The difference of the GND is shown by the LIVE : ($\perp$) side GND and the ISOLATED(NEUTRAL) : ($\perp$) side GND. Therefore, care must be taken for the following points.

- (1)Do not touch the LIVE side GND or the LIVE side GND and the ISOLATED(NEUTRAL) side GND simultaneously. If the above caution is not respected, an electric shock may be caused. Therefore, make sure that the power cord is surely removed from the receptacle when, for example, the chassis is pulled out.
- (2)Do not short between the LIVE side GND and ISOLATED(NEUTRAL) side GND or never measure with a measuring apparatus (oscilloscope, etc.) the LIVE side GND and ISOLATED(NEUTRAL) side GND at the same time. If the above precaution is not respected , a fuse or any parts will be broken.

◇ Since the circuit diagram is a standard one, the circuit and circuit constants may be subject to change for improvement without any notice.

CONTENTS

SEMICONDUCTOR SHAPES 2-2

BLOCK DIAGRAM [AV-27950] 2-3

BLOCK DIAGRAM [AV-27980/AV-27985] 2-5

CIRCUIT DIAGRAMS

MAIN PWB & FRONT CONTROL PWB CIRCUIT DIAGRAM	[AV-27950]	2-7
MAIN PWB & FRONT CONTROL PWB CIRCUIT DIAGRAM	[AV-27980/AV-27985]	2-9
MAIN PWB & CRT SOCKET PWB CIRCUIT DIAGRAM	[AV-27950/AV-27980/AV-27985]	2-11
AV SELECTOR PWB CIRCUIT DIAGRAM	[AV-27950]	2-13
AV SELECTOR PWB CIRCUIT DIAGRAM	[AV-27980/AV-27985]	2-15
PIP PWB CIRCUIT DIAGRAM		2-17
GUIDE PLUS + MODULE PWB CIRCUIT DIAGRAM	[AV-27980/AV-27985]	2-19

PATTERN DIAGRAMS

MAIN PWB PATTERN	2-21
AV SELECTOR PWB PATTERN	[AV-27950] 2-23
AV SELECTOR PWB PATTERN	[AV-27980/AV-27985] 2-25
PIP PWB PATTERN	2-27
FRONT CONTROL PWB PATTERN	2-28
CRT SOCKET PWB PATTERN	2-29
GUIDE PLUS + MODULE PWB PATTERN	2-30

CHANNEL CHART (US) 2-31

(CA) 2-32

SEMICONDUCTOR SHAPES

TRANSISTOR

BOTTOM VIEW	FRONT VIEW				TOP VIEW
					CHIP TR


IC


BOTTOM VIEW	FRONT VIEW			TOP VIEW

CHIP IC


TOP VIEW		


BLOCK DIAGRAM [AV-27950]

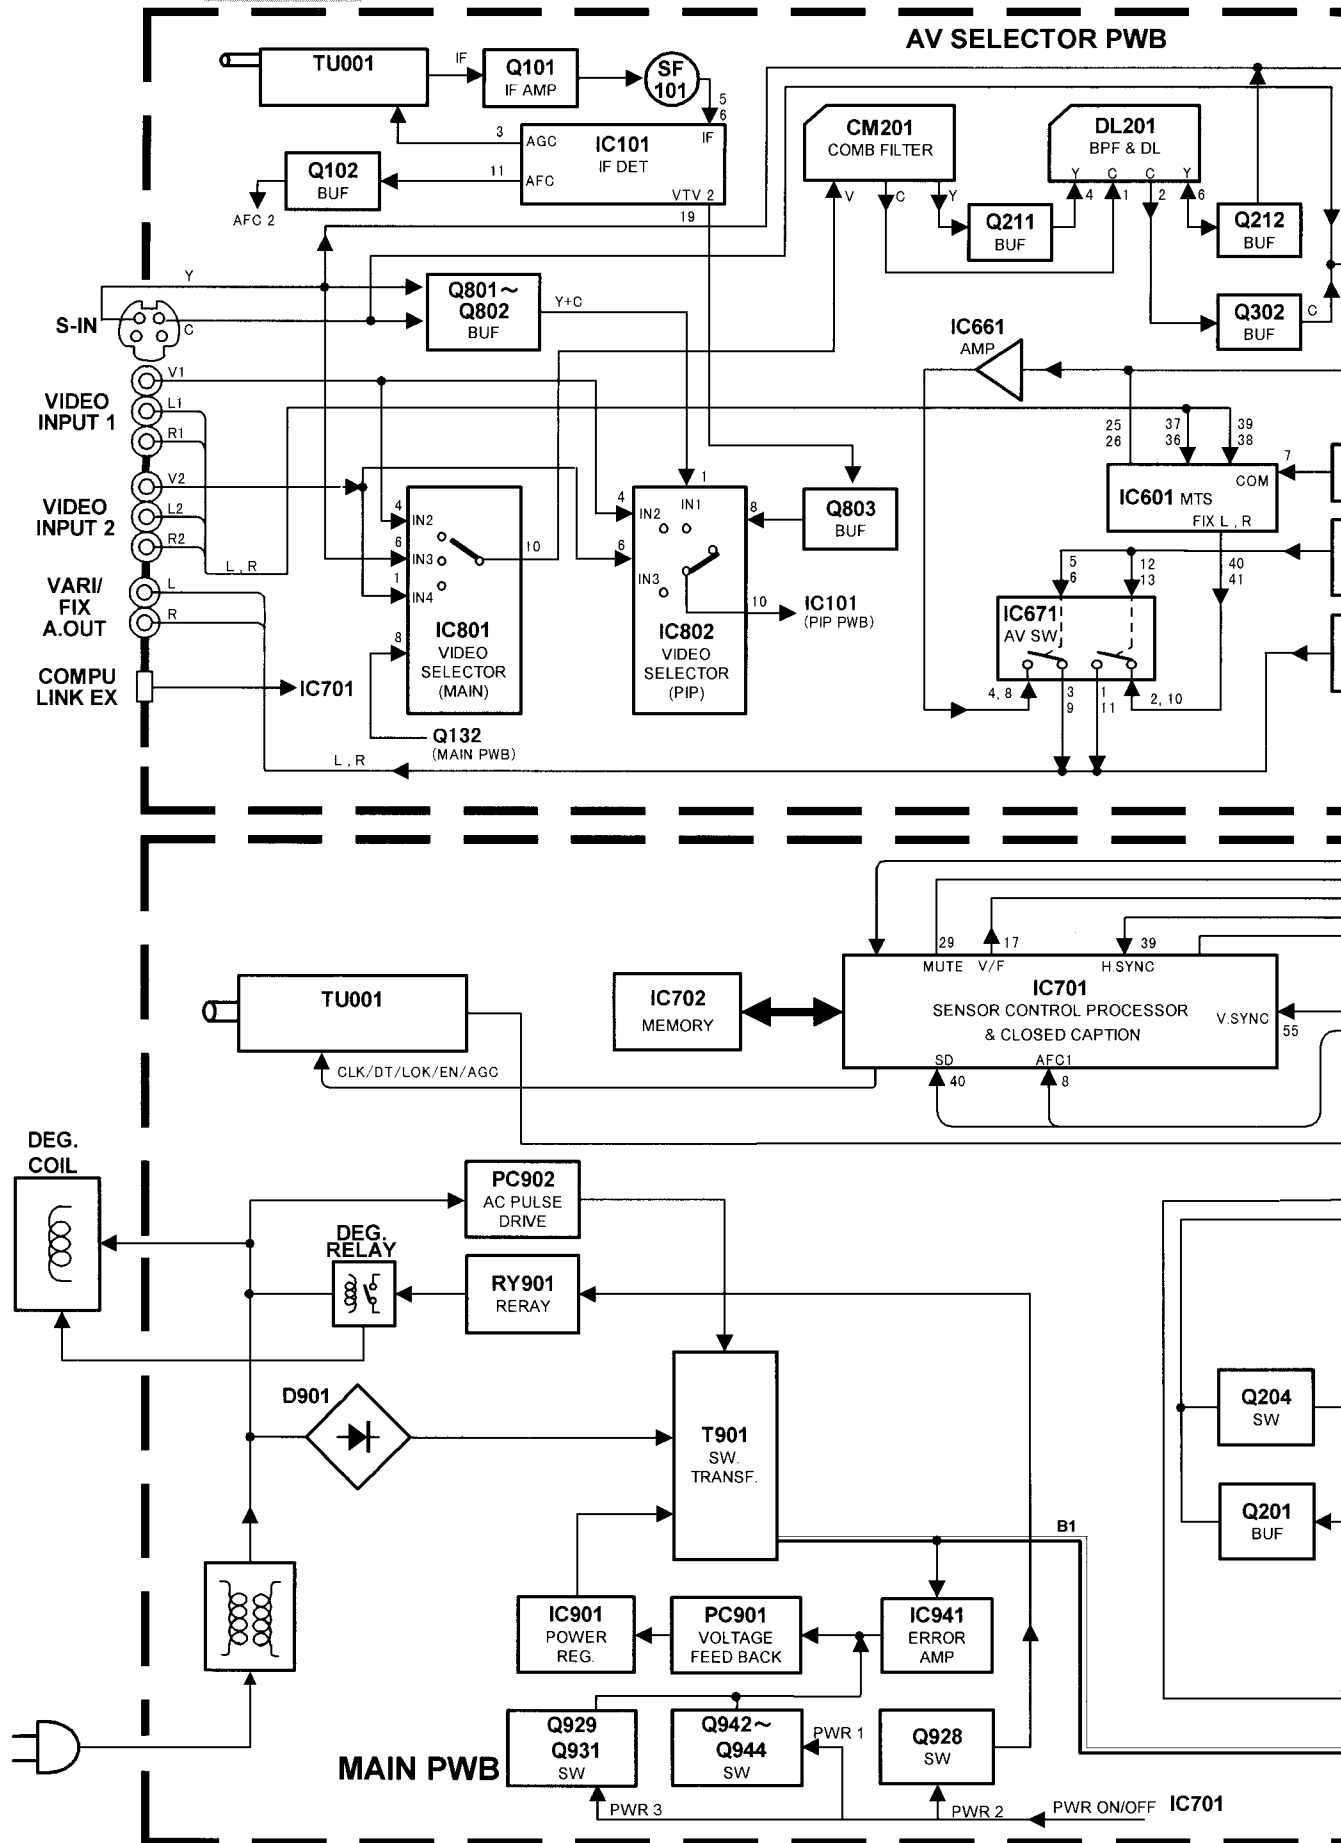

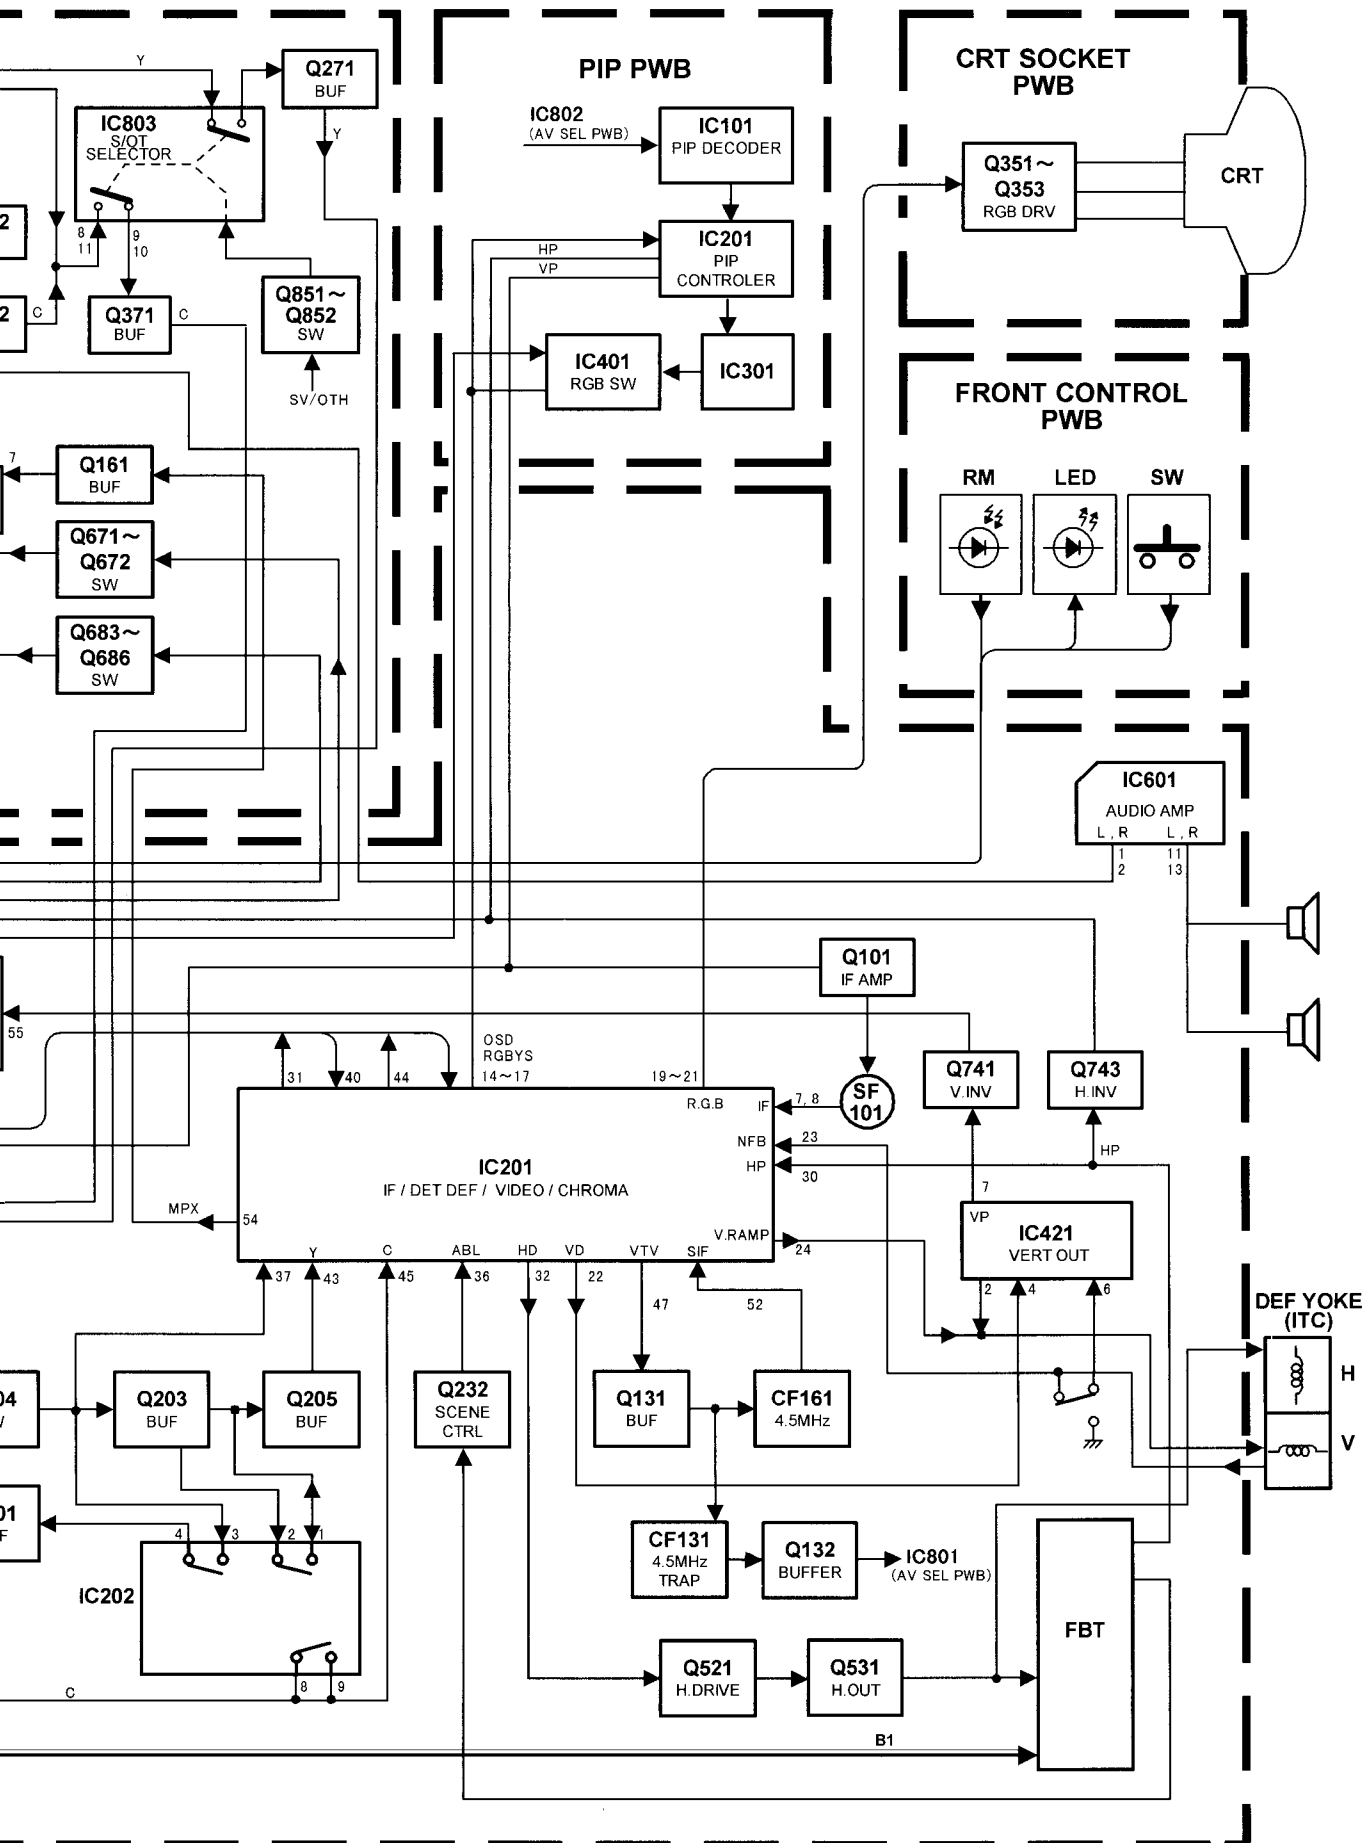


BLOCK DIAGRAM [AV-27980 / AV-27985]

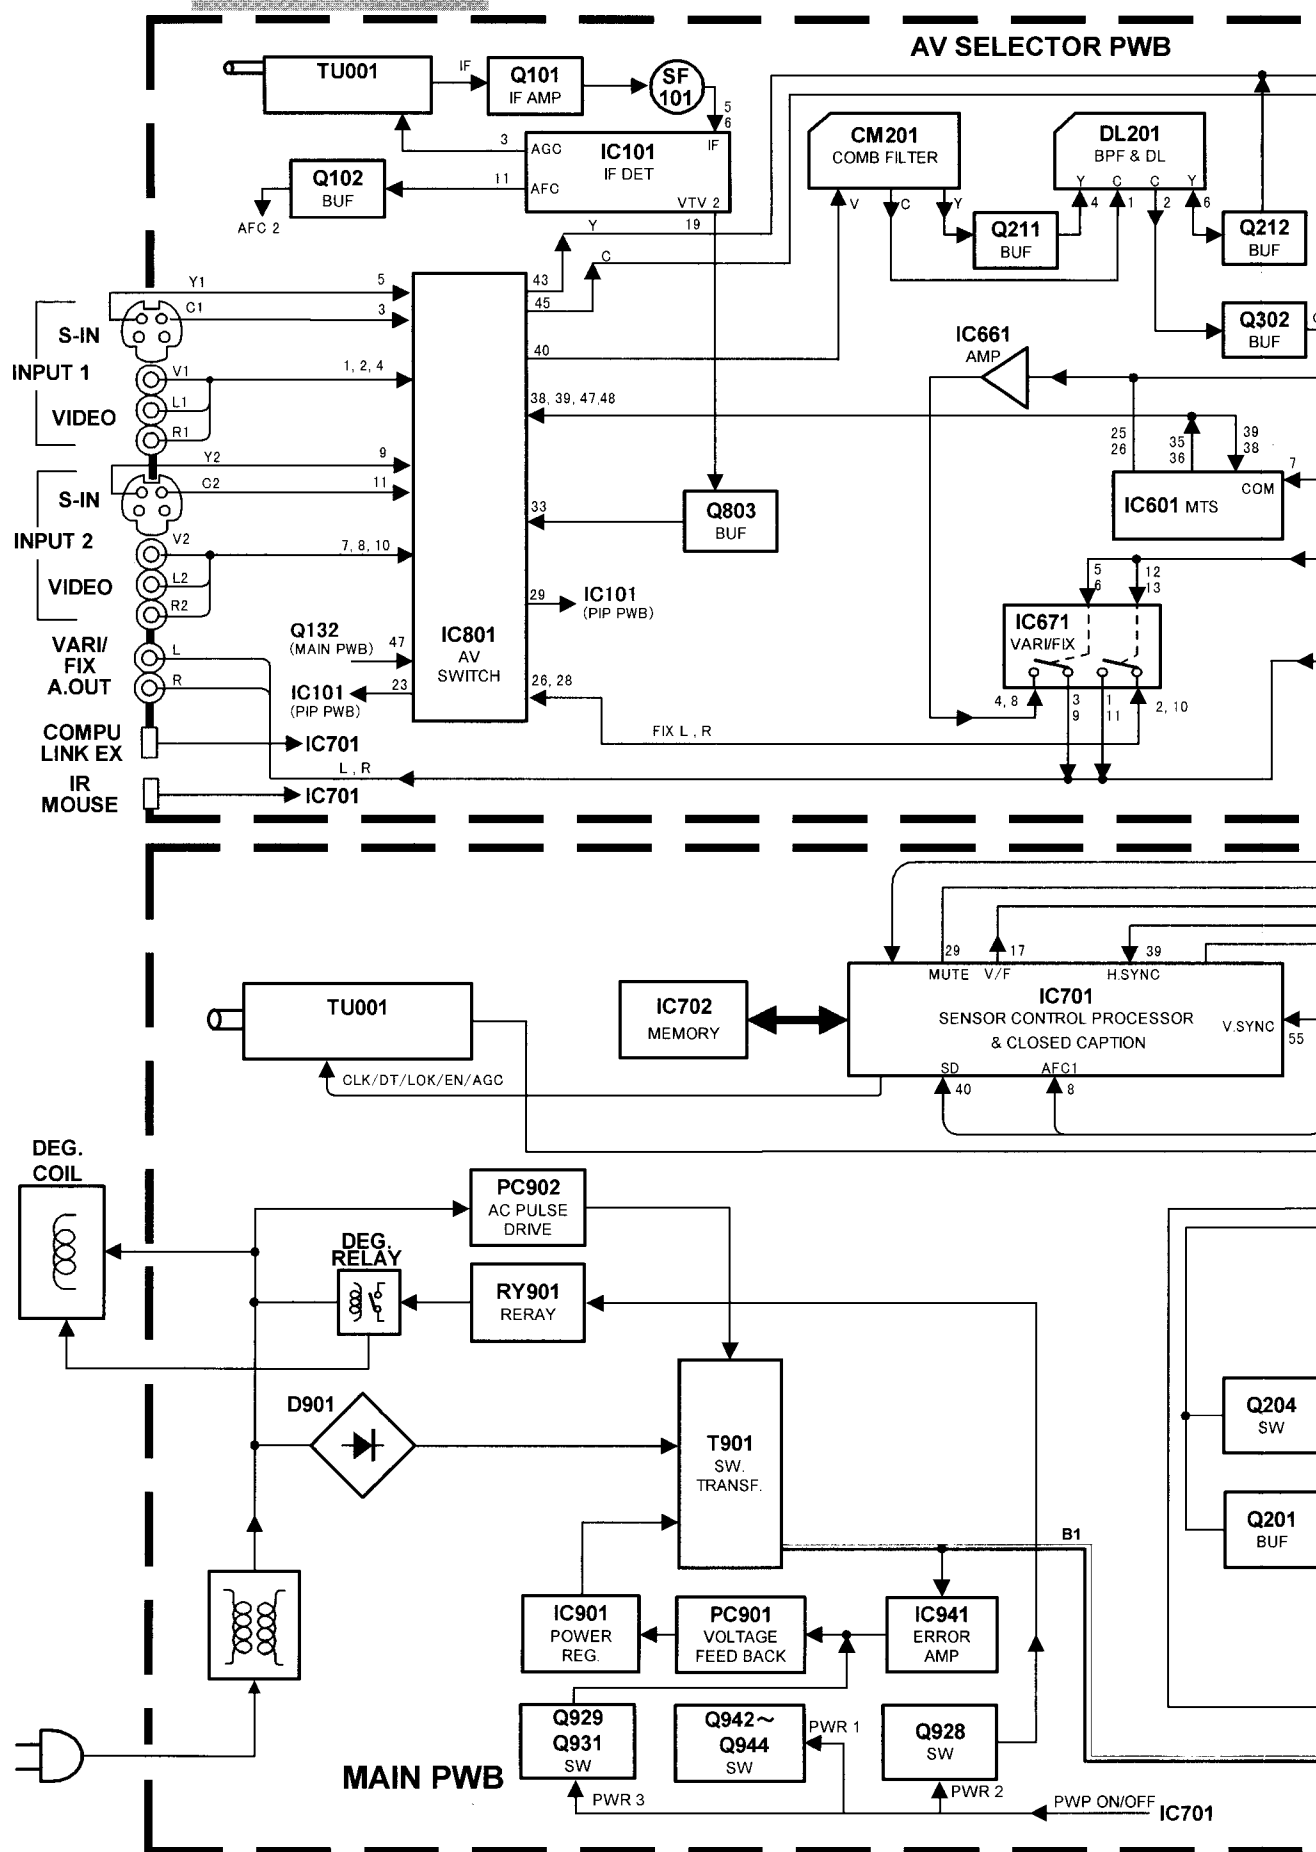


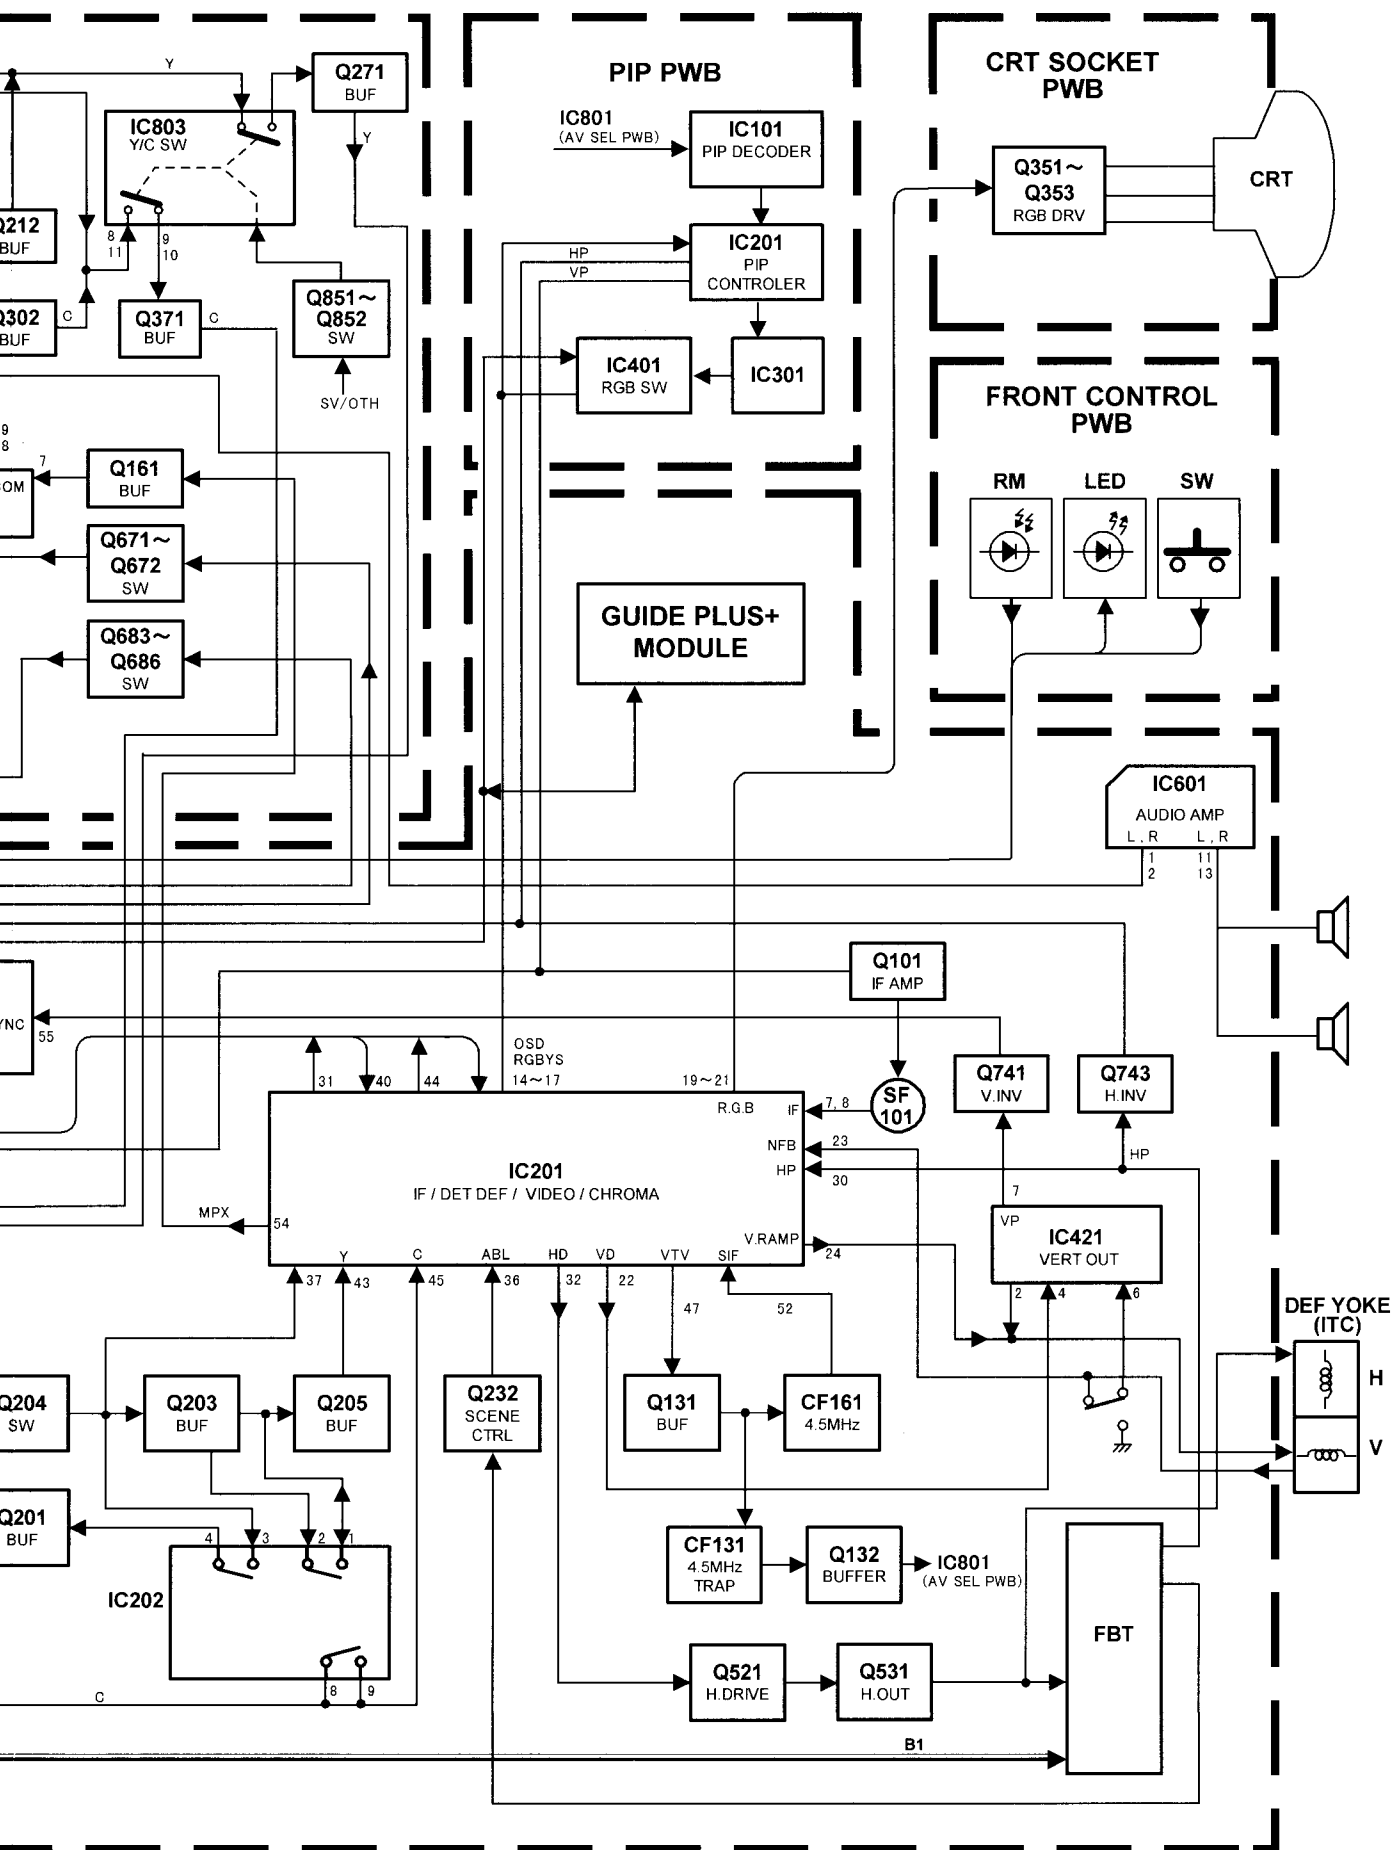




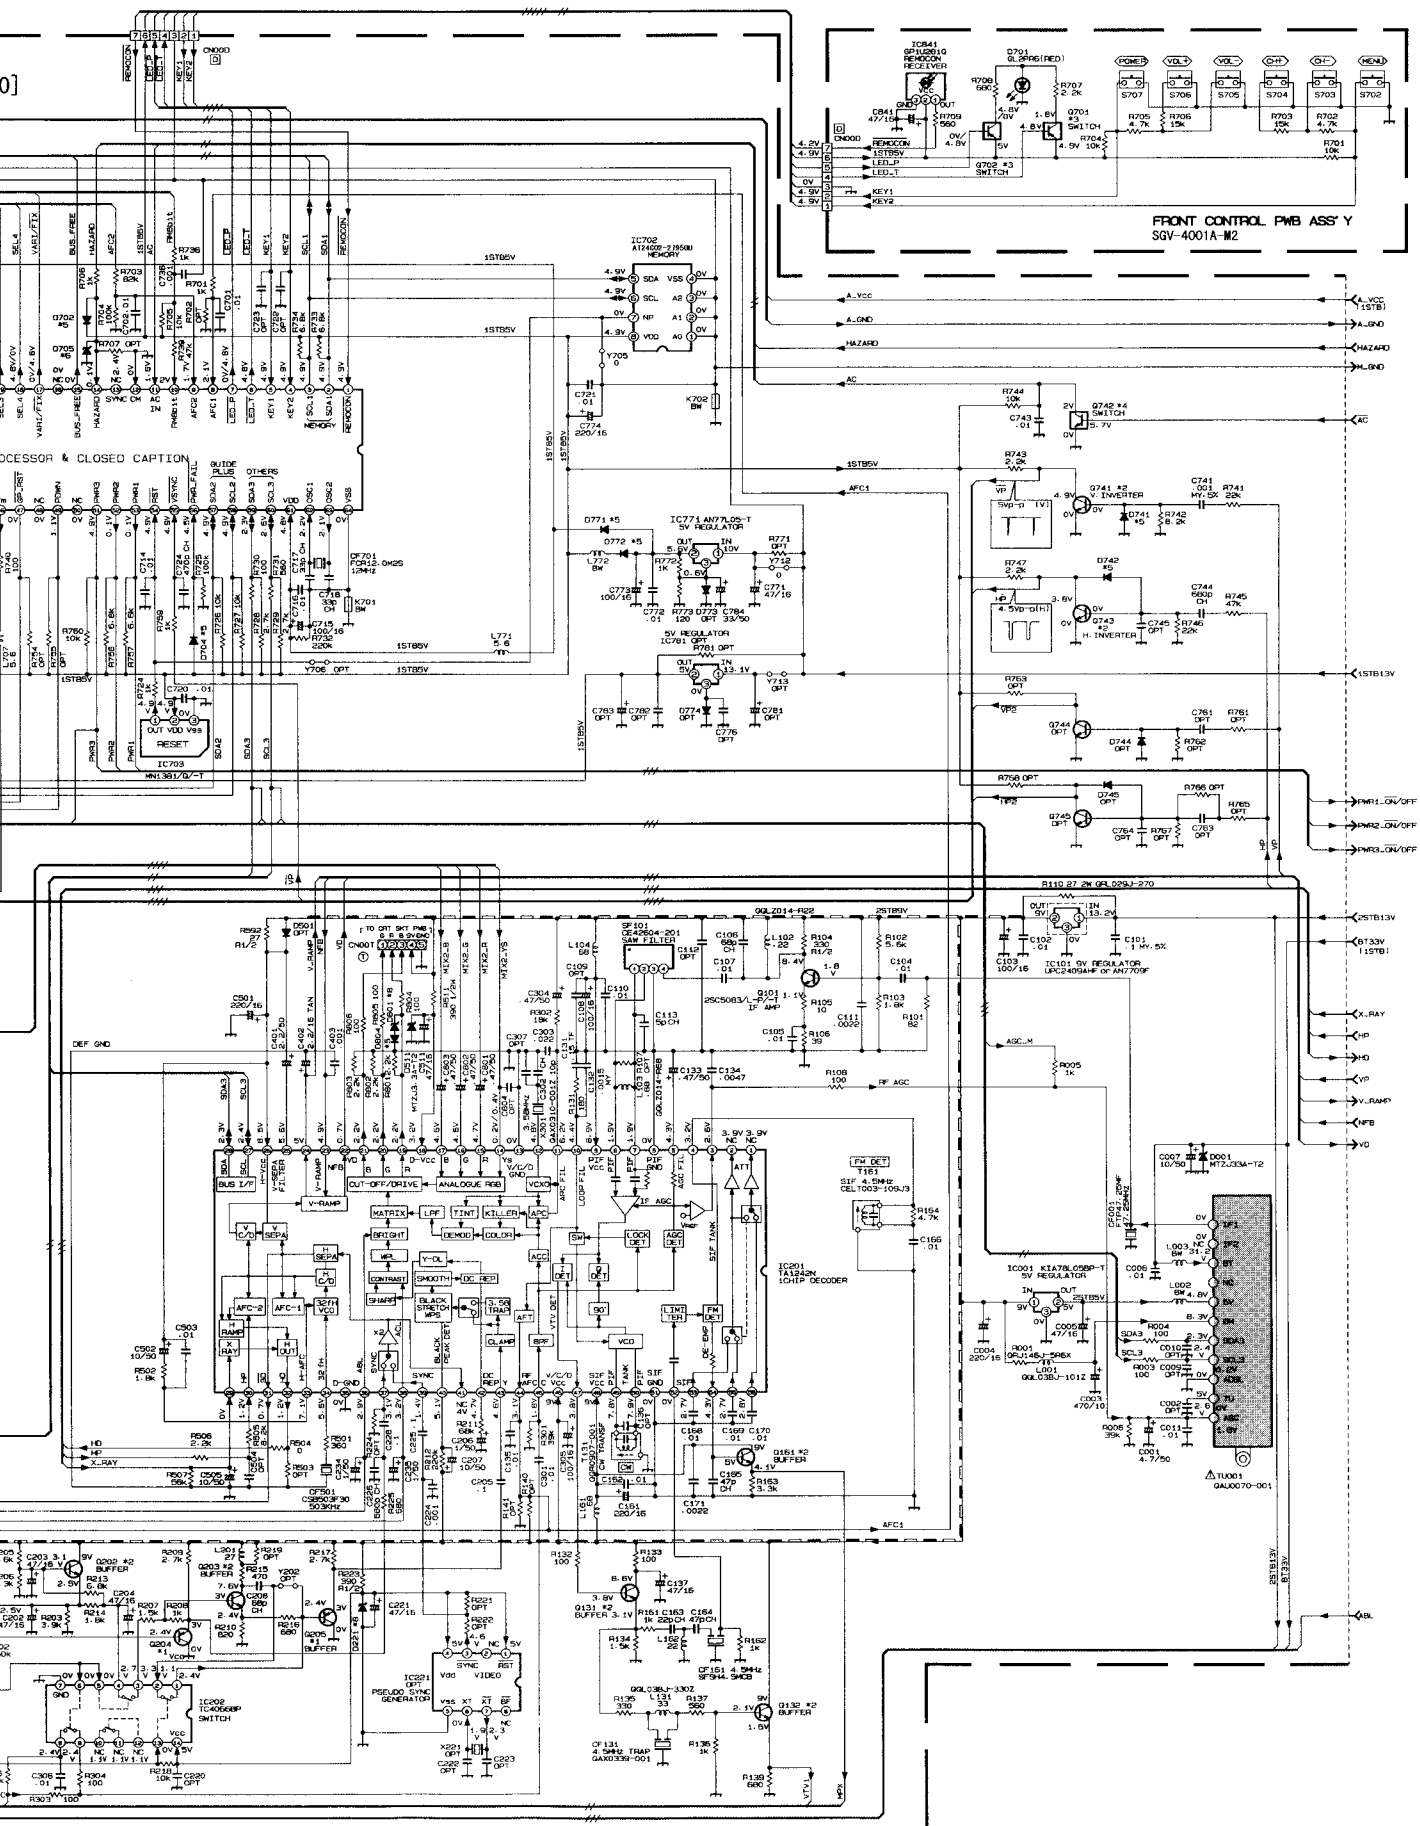


MAIN PWB & FRONT CONTROL PWB CIRCUIT DIAGRAM [AV-27980 / AV-27985]

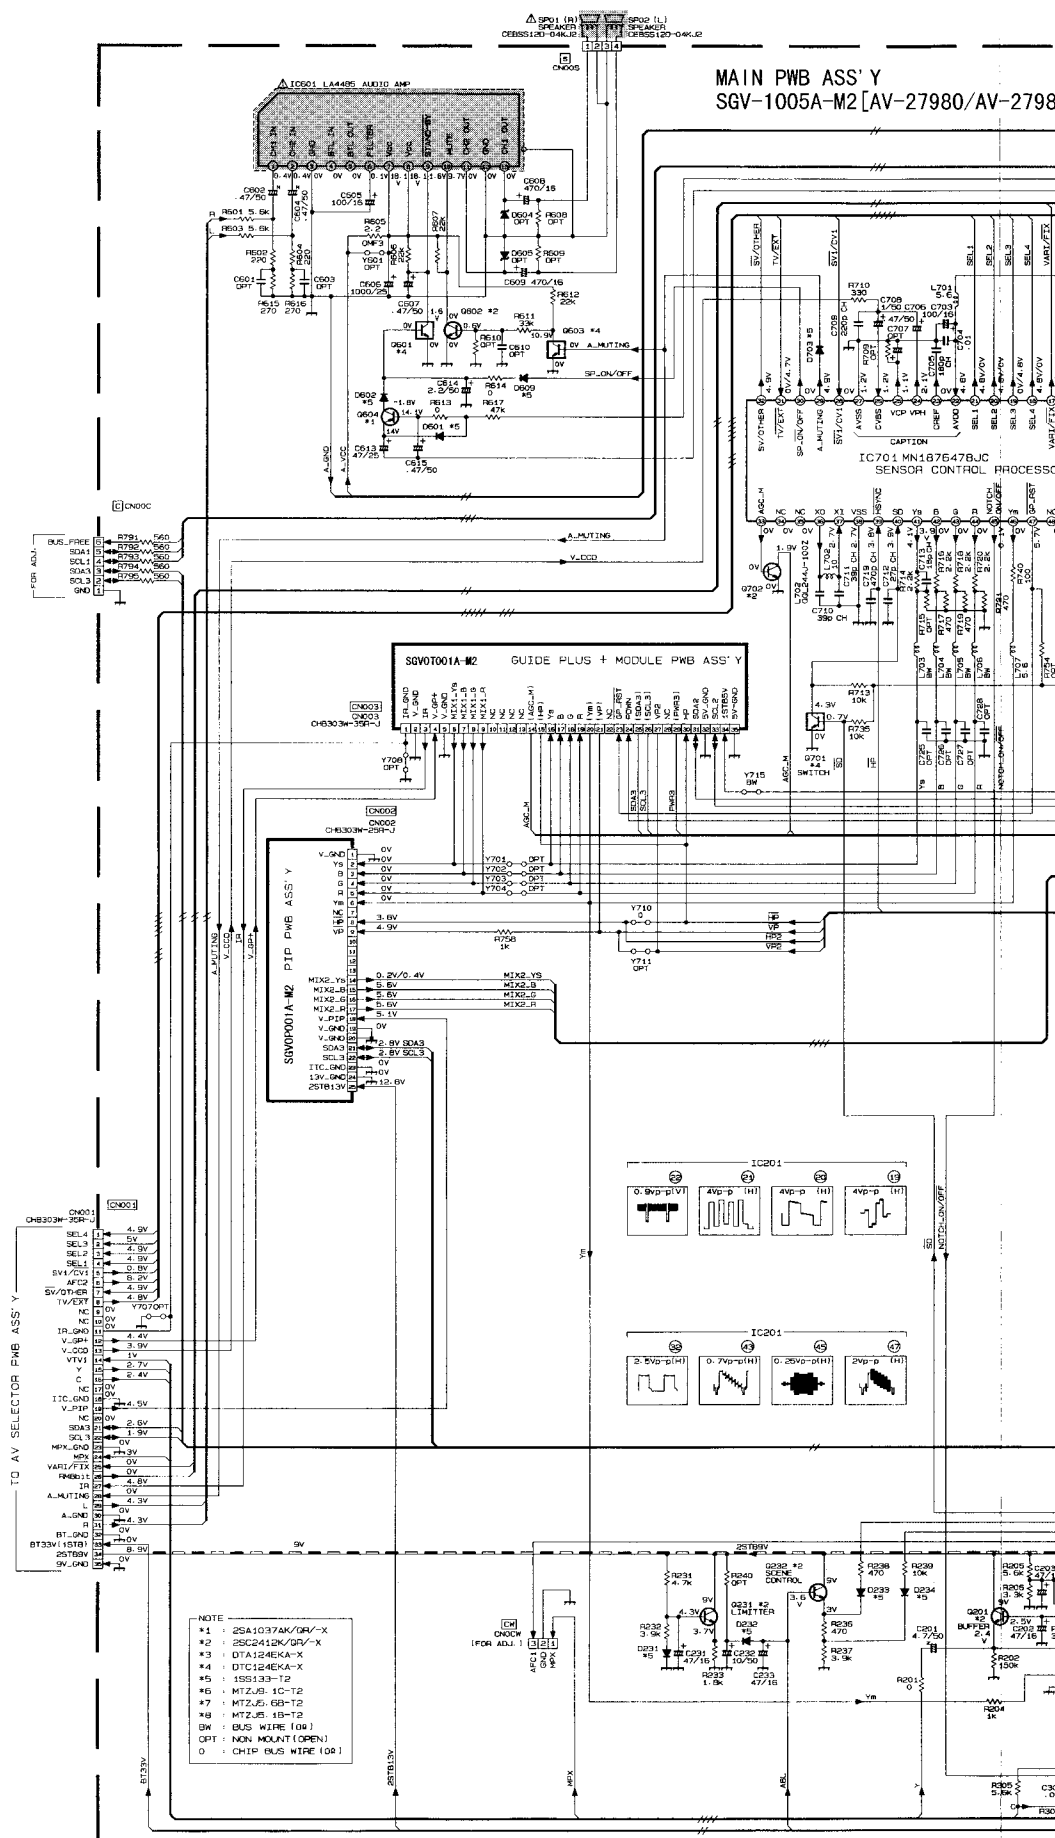

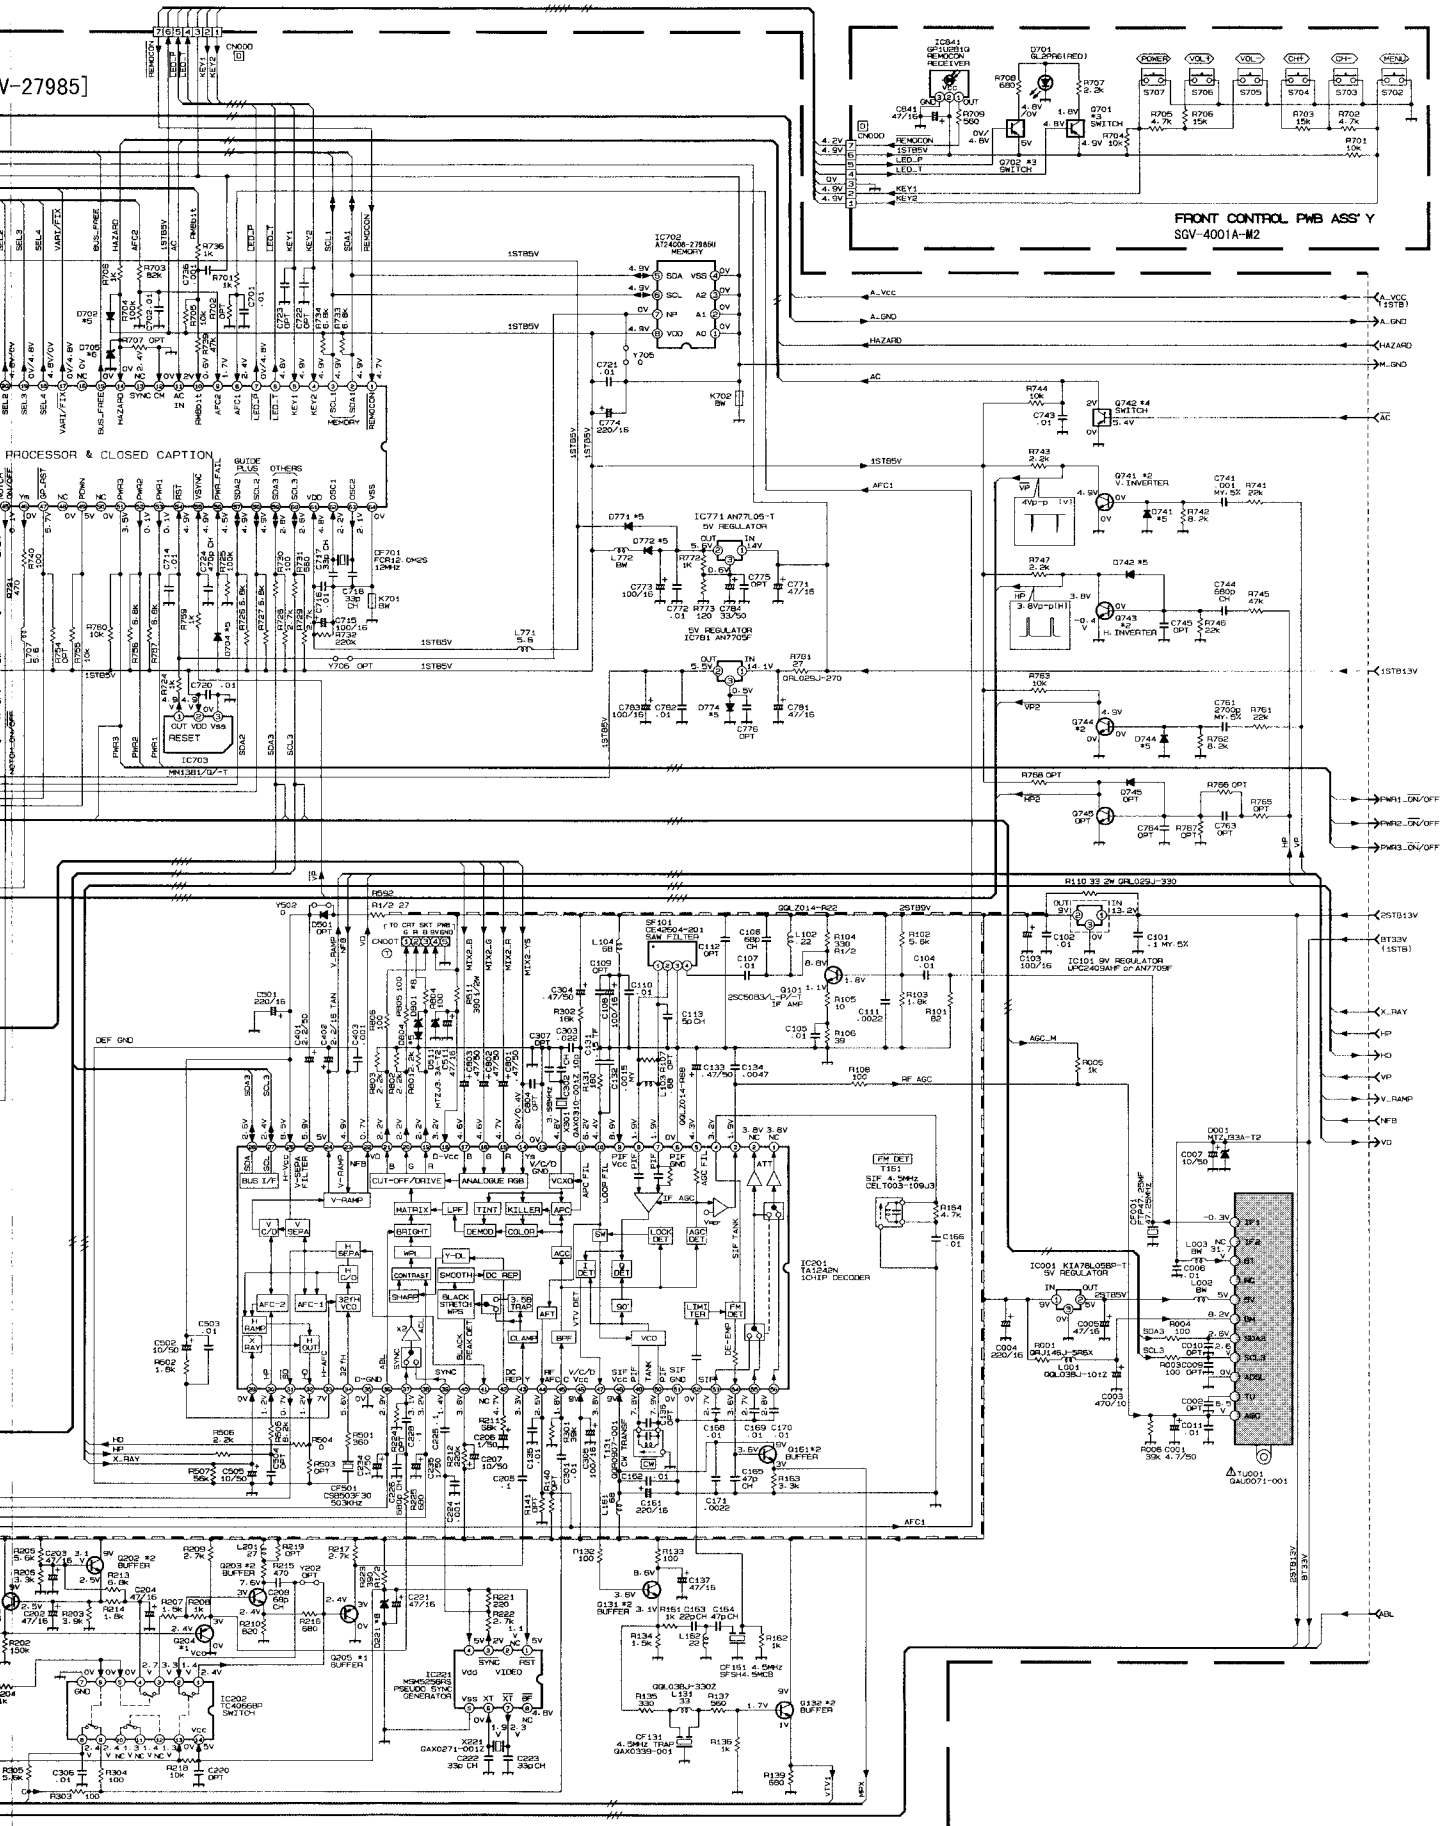

MAIN PWB & CRT SOCKET PWB CIRCUIT DIAGRAM [AV-27950 / AV-27980 / AV-27985]

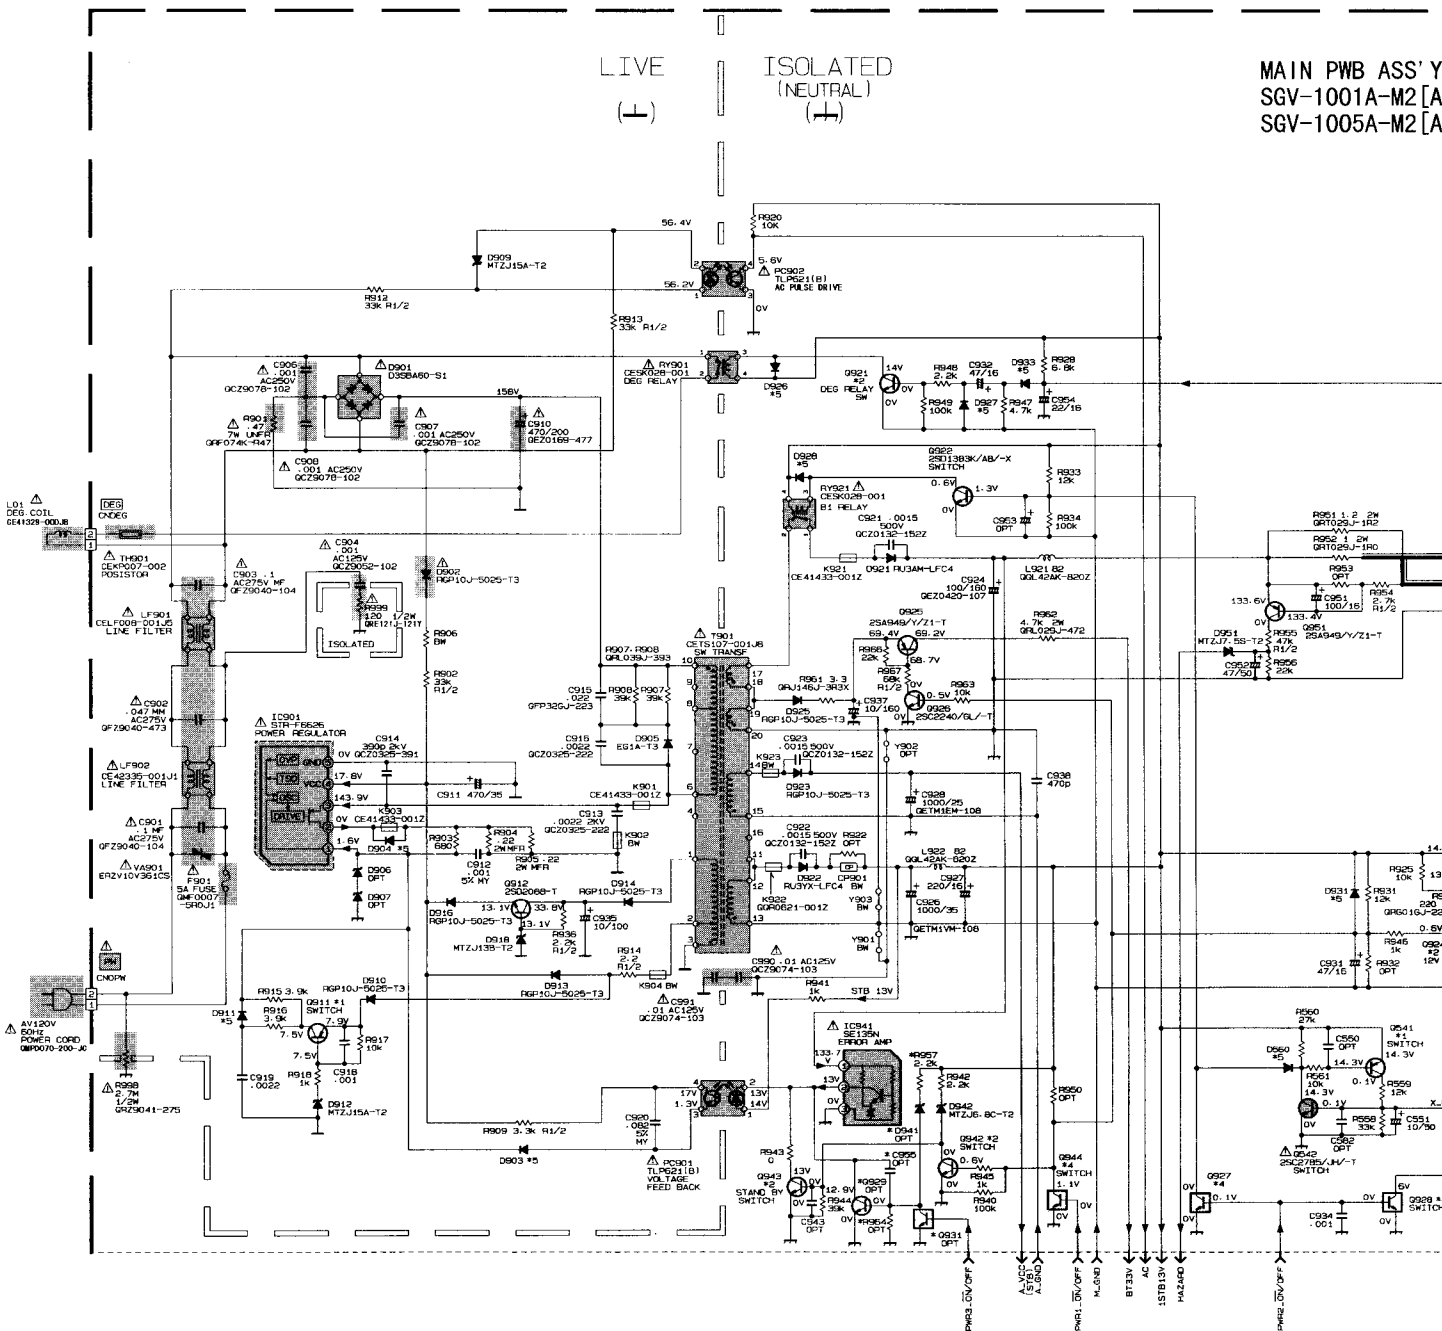

MAIN PWB ASS'Y

* DIFFERENCE LIST

MODEL	AV-27950	AV-27980	AV-27985
Q901	OPT	MTZJ15A-T2	MTZJ15A-T2
Q902	OPT	MTZJ15A-T2	MTZJ15A-T2
Q903	OPT	MTZJ15A-T2	MTZJ15A-T2
Q904	OPT	MTZJ15A-T2	MTZJ15A-T2
Q905	OPT	MTZJ15A-T2	MTZJ15A-T2
Q906	OPT	MTZJ15A-T2	MTZJ15A-T2
Q907	OPT	MTZJ15A-T2	MTZJ15A-T2
Q908	OPT	MTZJ15A-T2	MTZJ15A-T2
Q909	OPT	MTZJ15A-T2	MTZJ15A-T2
Q910	OPT	MTZJ15A-T2	MTZJ15A-T2
Q911	OPT	MTZJ15A-T2	MTZJ15A-T2
Q912	OPT	MTZJ15A-T2	MTZJ15A-T2
Q913	OPT	MTZJ15A-T2	MTZJ15A-T2
Q914	OPT	MTZJ15A-T2	MTZJ15A-T2
Q915	OPT	MTZJ15A-T2	MTZJ15A-T2
Q916	OPT	MTZJ15A-T2	MTZJ15A-T2
Q917	OPT	MTZJ15A-T2	MTZJ15A-T2
Q918	OPT	MTZJ15A-T2	MTZJ15A-T2
Q919	OPT	MTZJ15A-T2	MTZJ15A-T2
Q920	OPT	MTZJ15A-T2	MTZJ15A-T2
Q921	OPT	MTZJ15A-T2	MTZJ15A-T2
Q922	OPT	MTZJ15A-T2	MTZJ15A-T2
Q923	OPT	MTZJ15A-T2	MTZJ15A-T2
Q924	OPT	MTZJ15A-T2	MTZJ15A-T2
Q925	OPT	MTZJ15A-T2	MTZJ15A-T2
Q926	OPT	MTZJ15A-T2	MTZJ15A-T2
Q927	OPT	MTZJ15A-T2	MTZJ15A-T2
Q928	OPT	MTZJ15A-T2	MTZJ15A-T2
Q929	OPT	MTZJ15A-T2	MTZJ15A-T2
Q930	OPT	MTZJ15A-T2	MTZJ15A-T2
Q931	OPT	MTZJ15A-T2	MTZJ15A-T2
Q932	OPT	MTZJ15A-T2	MTZJ15A-T2
Q933	OPT	MTZJ15A-T2	MTZJ15A-T2
Q934	OPT	MTZJ15A-T2	MTZJ15A-T2
Q935	OPT	MTZJ15A-T2	MTZJ15A-T2
Q936	OPT	MTZJ15A-T2	MTZJ15A-T2
Q937	OPT	MTZJ15A-T2	MTZJ15A-T2
Q938	OPT	MTZJ15A-T2	MTZJ15A-T2
Q939	OPT	MTZJ15A-T2	MTZJ15A-T2
Q940	OPT	MTZJ15A-T2	MTZJ15A-T2
Q941	OPT	MTZJ15A-T2	MTZJ15A-T2
Q942	OPT	MTZJ15A-T2	MTZJ15A-T2
Q943	OPT	MTZJ15A-T2	MTZJ15A-T2
Q944	OPT	MTZJ15A-T2	MTZJ15A-T2
Q945	OPT	MTZJ15A-T2	MTZJ15A-T2
Q946	OPT	MTZJ15A-T2	MTZJ15A-T2
Q947	OPT	MTZJ15A-T2	MTZJ15A-T2
Q948	OPT	MTZJ15A-T2	MTZJ15A-T2
Q949	OPT	MTZJ15A-T2	MTZJ15A-T2
Q950	OPT	MTZJ15A-T2	MTZJ15A-T2
Q951	OPT	MTZJ15A-T2	MTZJ15A-T2
Q952	OPT	MTZJ15A-T2	MTZJ15A-T2
Q953	OPT	MTZJ15A-T2	MTZJ15A-T2
Q954	OPT	MTZJ15A-T2	MTZJ15A-T2
Q955	OPT	MTZJ15A-T2	MTZJ15A-T2
Q956	OPT	MTZJ15A-T2	MTZJ15A-T2
Q957	OPT	MTZJ15A-T2	MTZJ15A-T2
Q958	OPT	MTZJ15A-T2	MTZJ15A-T2
Q959	OPT	MTZJ15A-T2	MTZJ15A-T2
Q960	OPT	MTZJ15A-T2	MTZJ15A-T2
Q961	OPT	MTZJ15A-T2	MTZJ15A-T2
Q962	OPT	MTZJ15A-T2	MTZJ15A-T2
Q963	OPT	MTZJ15A-T2	MTZJ15A-T2
Q964	OPT	MTZJ15A-T2	MTZJ15A-T2
Q965	OPT	MTZJ15A-T2	MTZJ15A-T2
Q966	OPT	MTZJ15A-T2	MTZJ15A-T2
Q967	OPT	MTZJ15A-T2	MTZJ15A-T2
Q968	OPT	MTZJ15A-T2	MTZJ15A-T2
Q969	OPT	MTZJ15A-T2	MTZJ15A-T2
Q970	OPT	MTZJ15A-T2	MTZJ15A-T2
Q971	OPT	MTZJ15A-T2	MTZJ15A-T2
Q972	OPT	MTZJ15A-T2	MTZJ15A-T2
Q973	OPT	MTZJ15A-T2	MTZJ15A-T2
Q974	OPT	MTZJ15A-T2	MTZJ15A-T2
Q975	OPT	MTZJ15A-T2	MTZJ15A-T2
Q976	OPT	MTZJ15A-T2	MTZJ15A-T2
Q977	OPT	MTZJ15A-T2	MTZJ15A-T2
Q978	OPT	MTZJ15A-T2	MTZJ15A-T2
Q979	OPT	MTZJ15A-T2	MTZJ15A-T2
Q980	OPT	MTZJ15A-T2	MTZJ15A-T2
Q981	OPT	MTZJ15A-T2	MTZJ15A-T2
Q982	OPT	MTZJ15A-T2	MTZJ15A-T2
Q983	OPT	MTZJ15A-T2	MTZJ15A-T2
Q984	OPT	MTZJ15A-T2	MTZJ15A-T2
Q985	OPT	MTZJ15A-T2	MTZJ15A-T2
Q986	OPT	MTZJ15A-T2	MTZJ15A-T2
Q987	OPT	MTZJ15A-T2	MTZJ15A-T2
Q988	OPT	MTZJ15A-T2	MTZJ15A-T2
Q989	OPT	MTZJ15A-T2	MTZJ15A-T2
Q990	OPT	MTZJ15A-T2	MTZJ15A-T2
Q991	OPT	MTZJ15A-T2	MTZJ15A-T2
Q992	OPT	MTZJ15A-T2	MTZJ15A-T2
Q993	OPT	MTZJ15A-T2	MTZJ15A-T2
Q994	OPT	MTZJ15A-T2	MTZJ15A-T2
Q995	OPT	MTZJ15A-T2	MTZJ15A-T2
Q996	OPT	MTZJ15A-T2	MTZJ15A-T2
Q997	OPT	MTZJ15A-T2	MTZJ15A-T2
Q998	OPT	MTZJ15A-T2	MTZJ15A-T2
Q999	OPT	MTZJ15A-T2	MTZJ15A-T2
Q1000	OPT	MTZJ15A-T2	MTZJ15A-T2

AV-27950
AV-27980
AV-27985

WB ASS'Y
DIFFERENCE LIST (#PARTS)


AV-	27950	27980	27985
SV	3001A-M2	3003A-M2	
OPT	#2		
OPT	#4		
OPT	MTZJ114		
OPT	2-2K		
OPT	35K		
OPT	.047		
70/35	ETH11VH		
22/250	4.7/250		
ETH11VH	ETH11VH		
100	228		

ORT SOCKET PWB * DIFFERENCE LIST (#PARTS)


AV-	27950	27980	27985
SV	3001A-M2	3003A-M2	
OPT	#2		
OPT	MTZJ114		
OPT	2-2K		
OPT	35K		
OPT	.047		
70/35	ETH11VH		
22/250	4.7/250		
ETH11VH	ETH11VH		
100	228		


NOTE
*1 : 2SA1037AK/8V~X
*2 : 2SC2412K/3V~X
*3 : DTA124EKA-X
*4 : DTC124EKA-X
*5 : 15S133-T2
*6 : MTZJ. 1C-T2
*7 : MTZJ. 5B-T2
*8 : BUS WIRE
OPT : NON MOUNT (OPEN)
O : CH12 BUS WIRE

ASS'Y
-M2 [AV-27950]
-M2 [AV-27980/AV-27985]

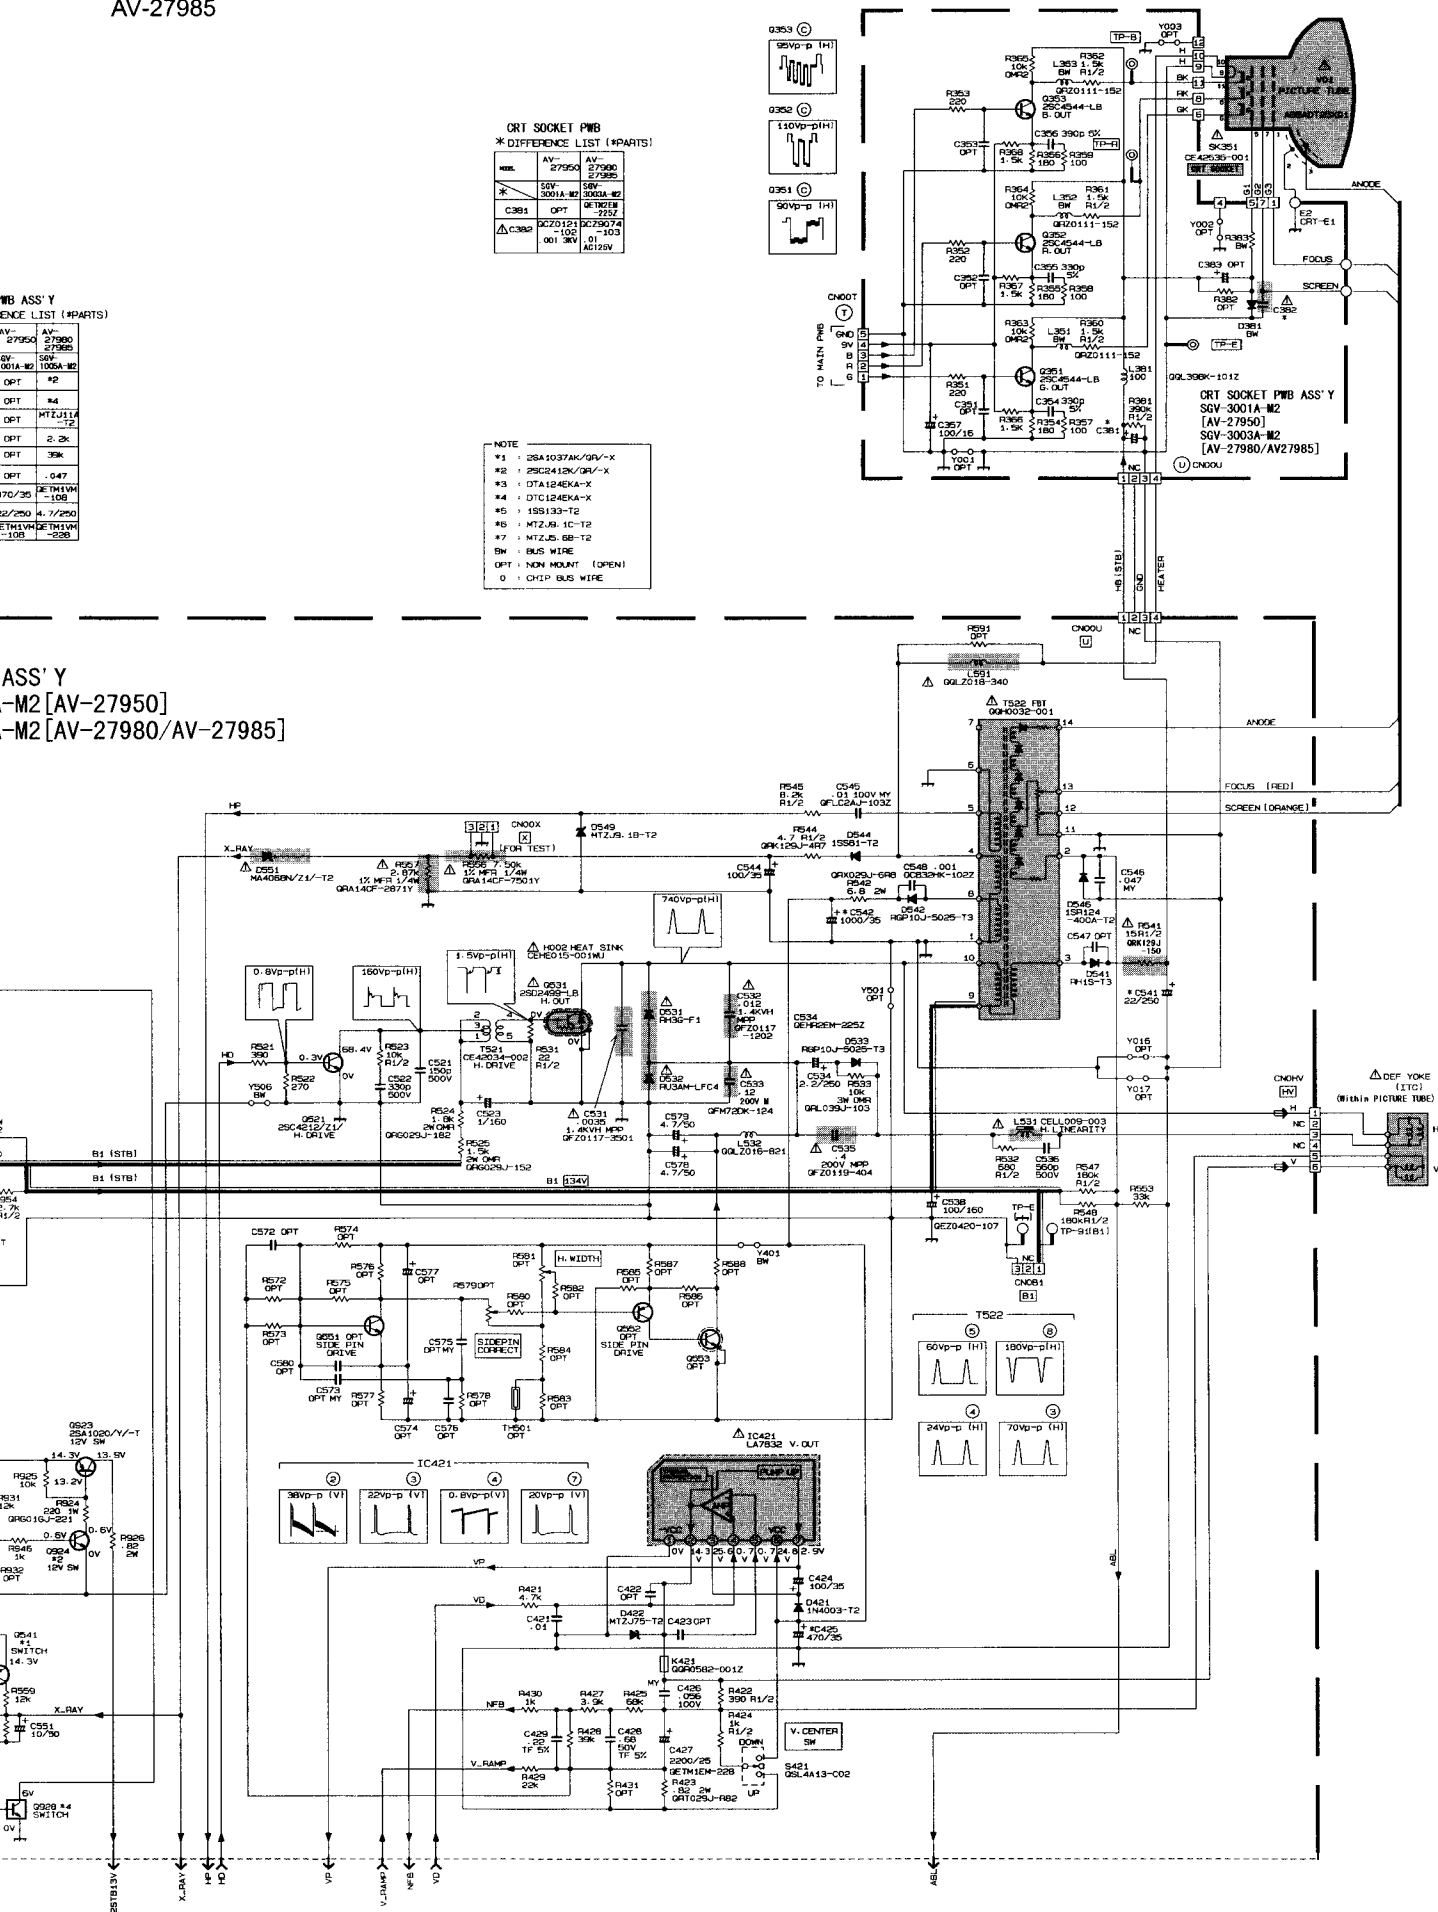


AV SELECTOR PWB CIRCUIT DIAGRAM [AV-27950]

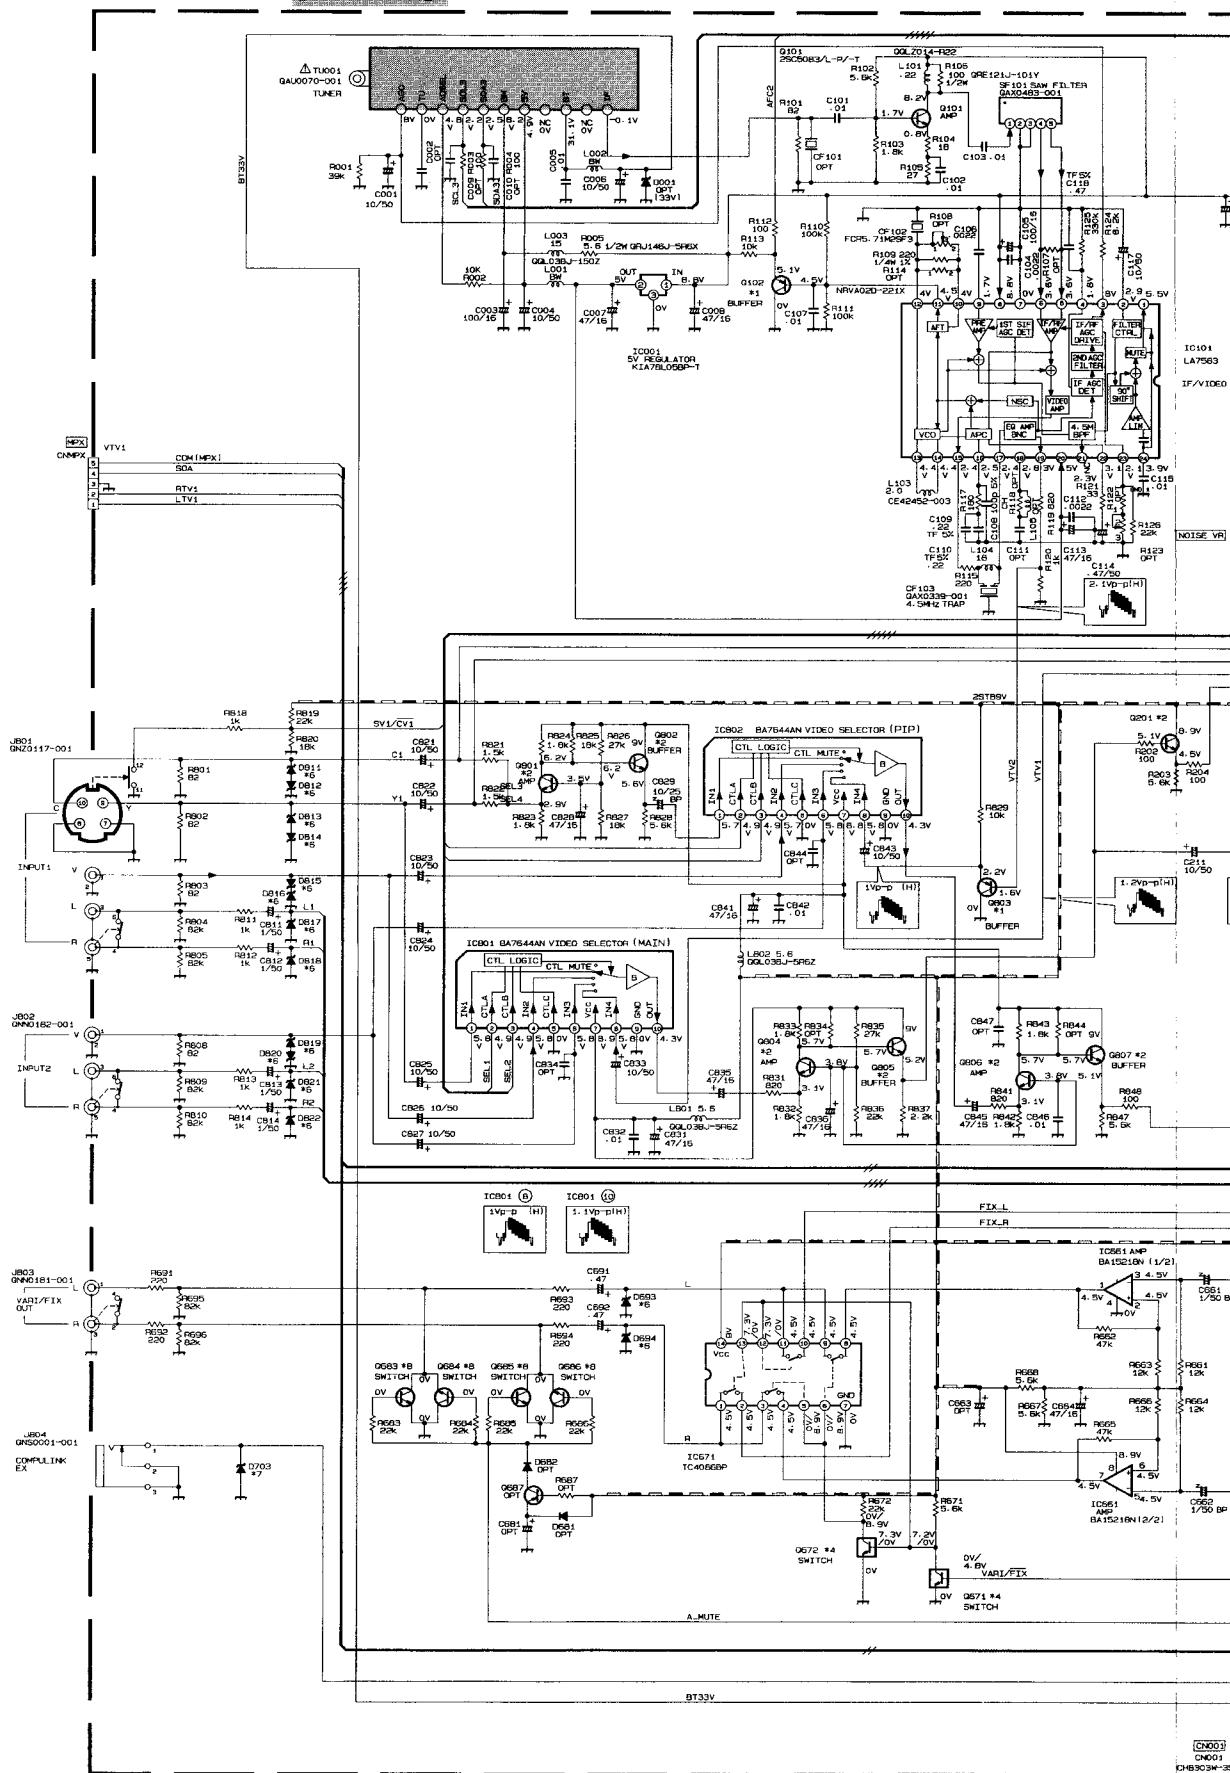

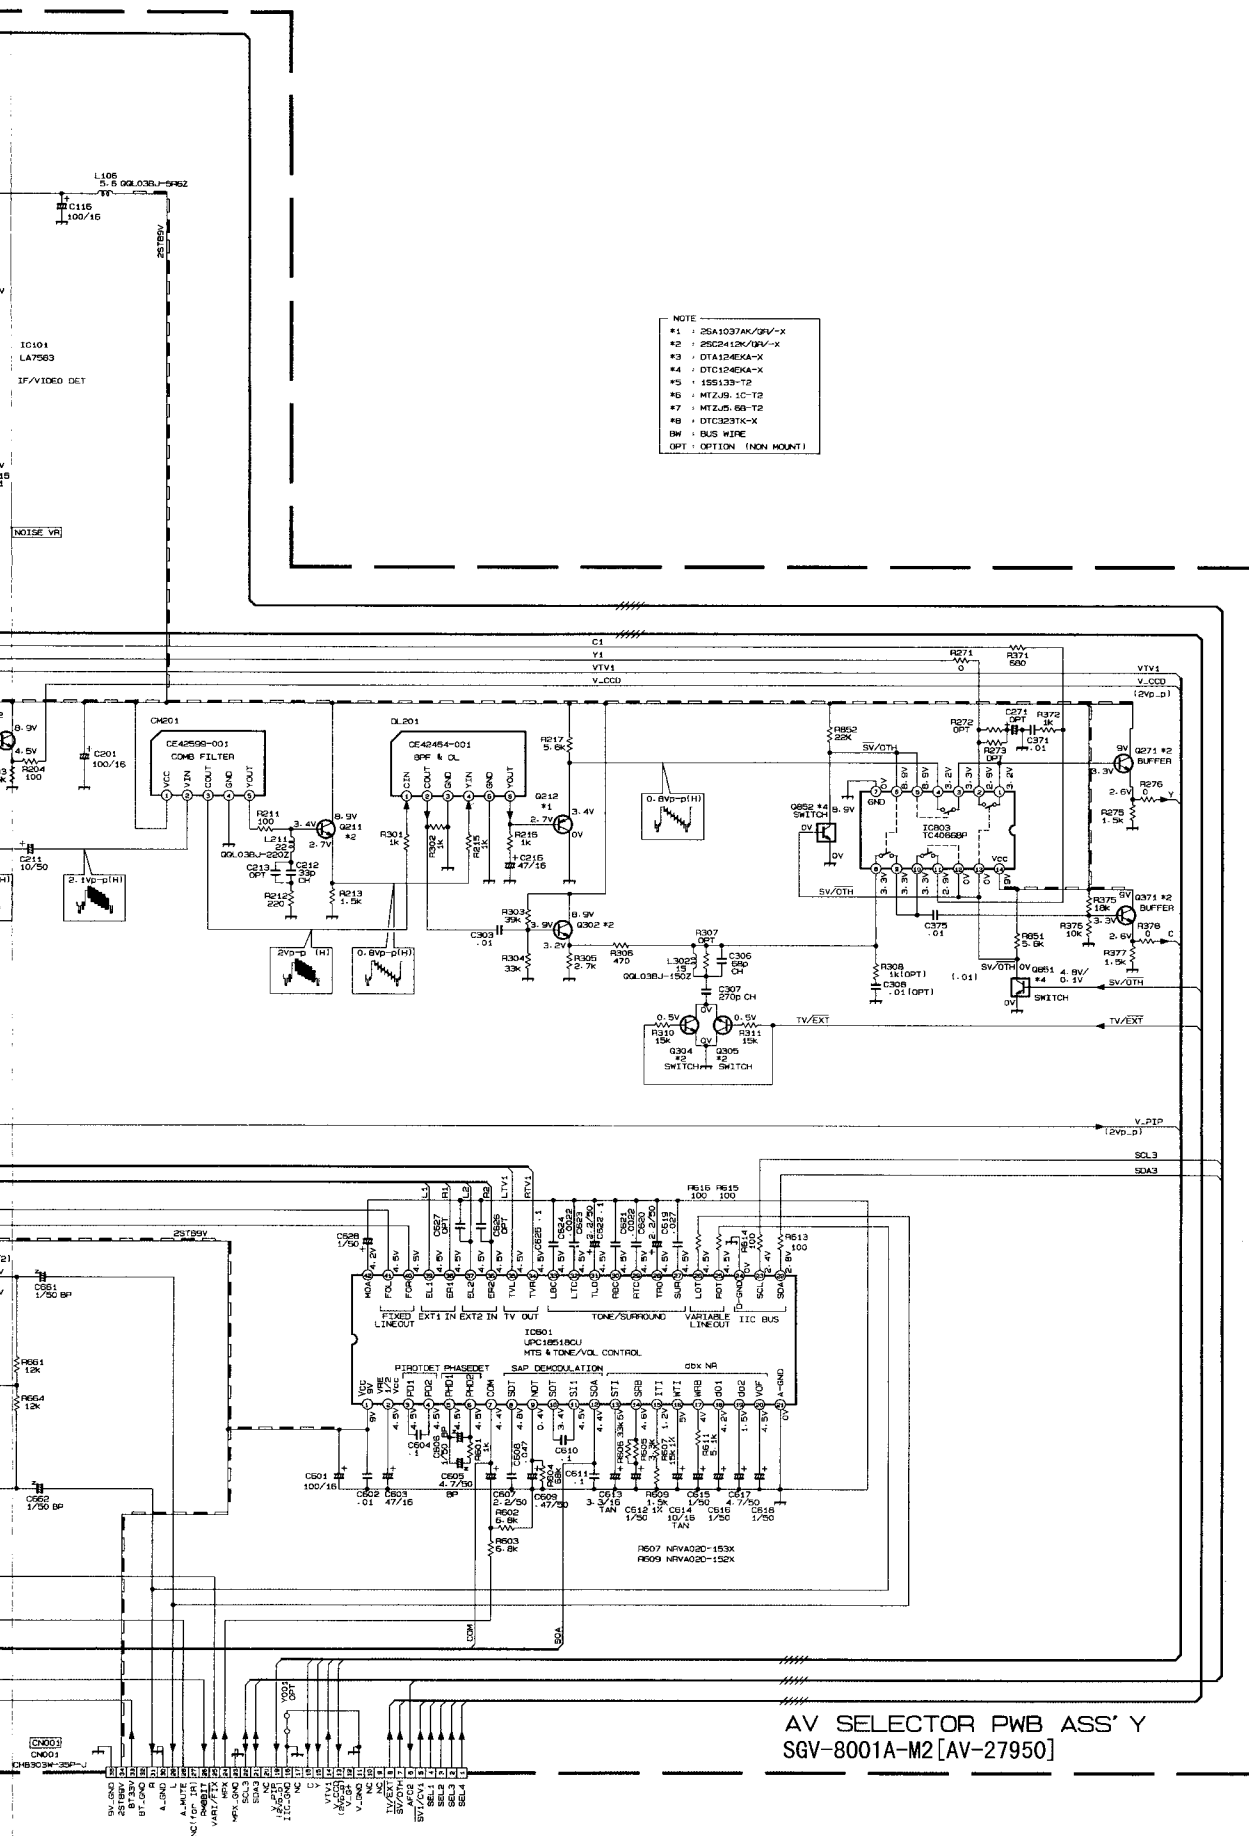



AV SELECTOR PWB ASS'Y
SGV-8001A-M2 [AV-27950]




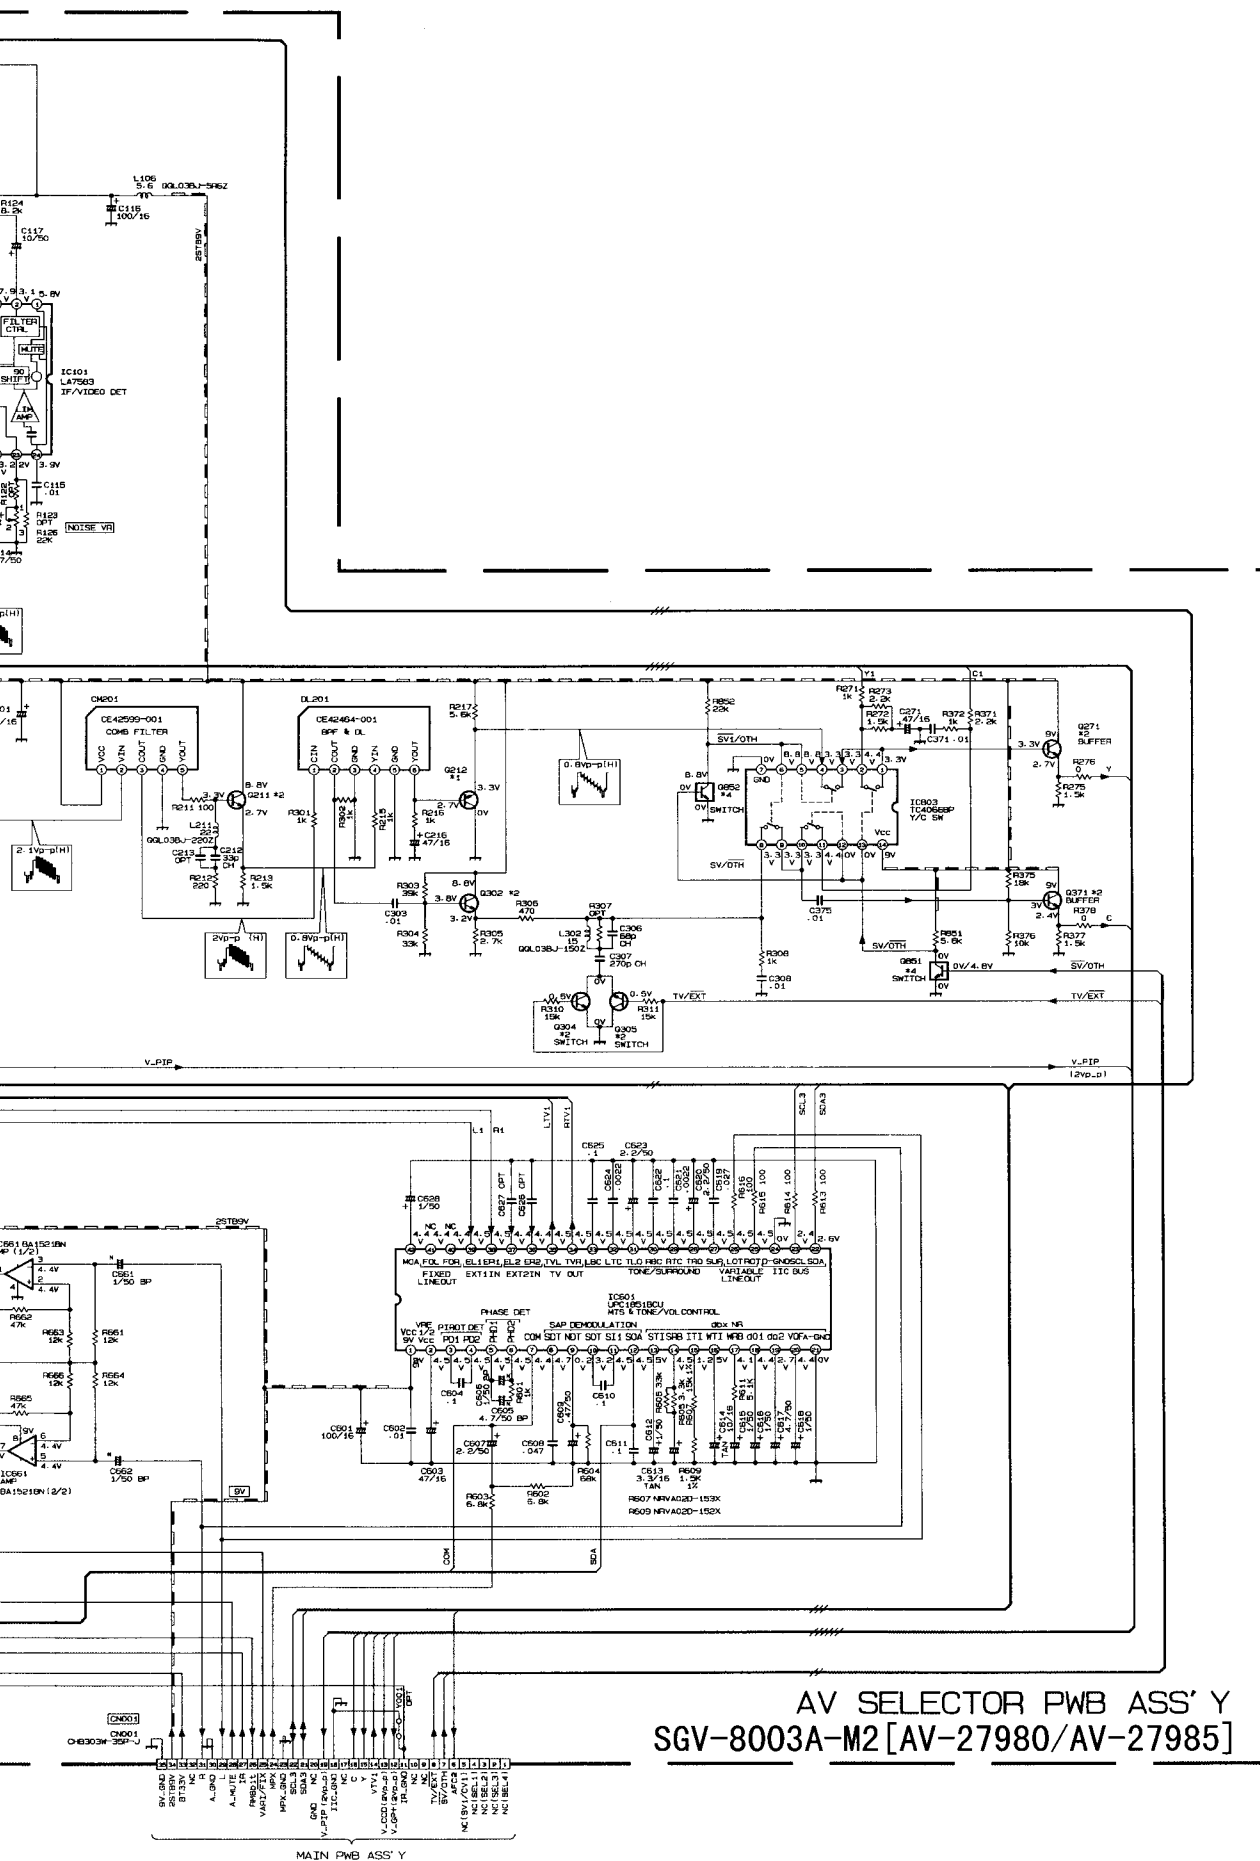


PIP PWB CIRCUIT DIAGRAM

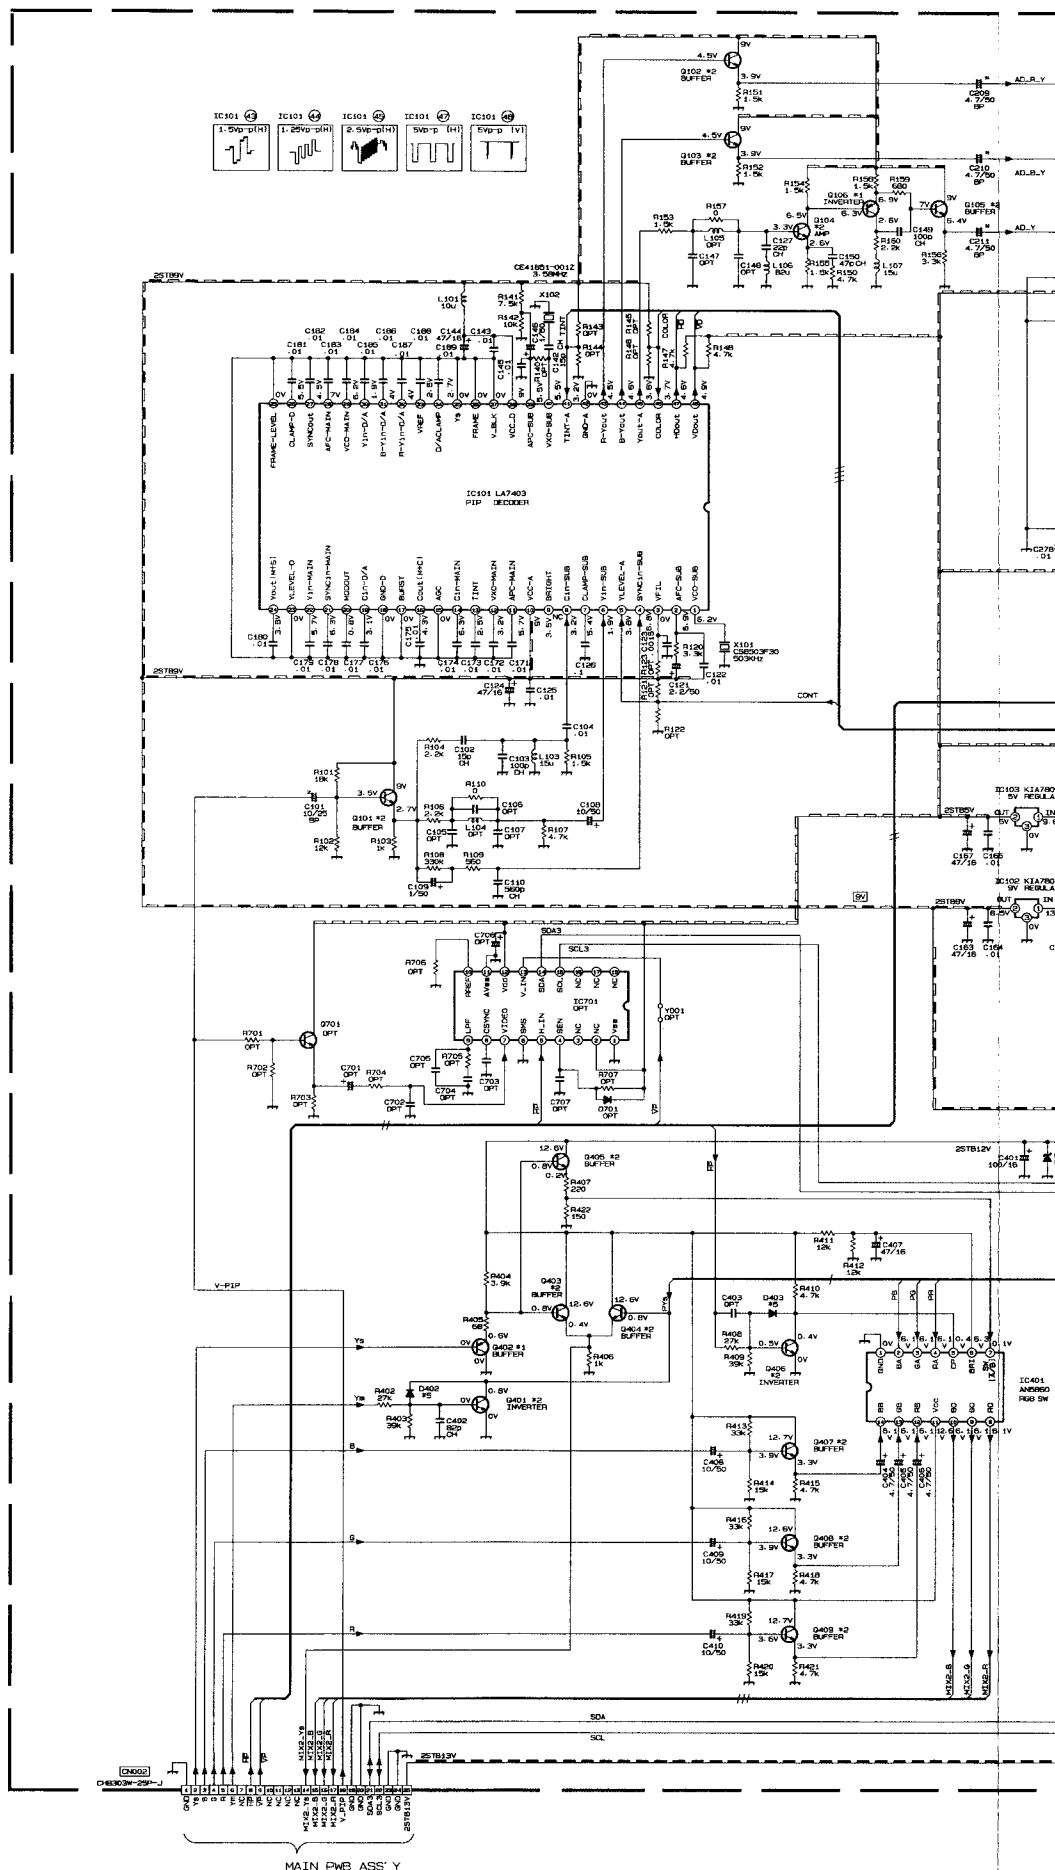



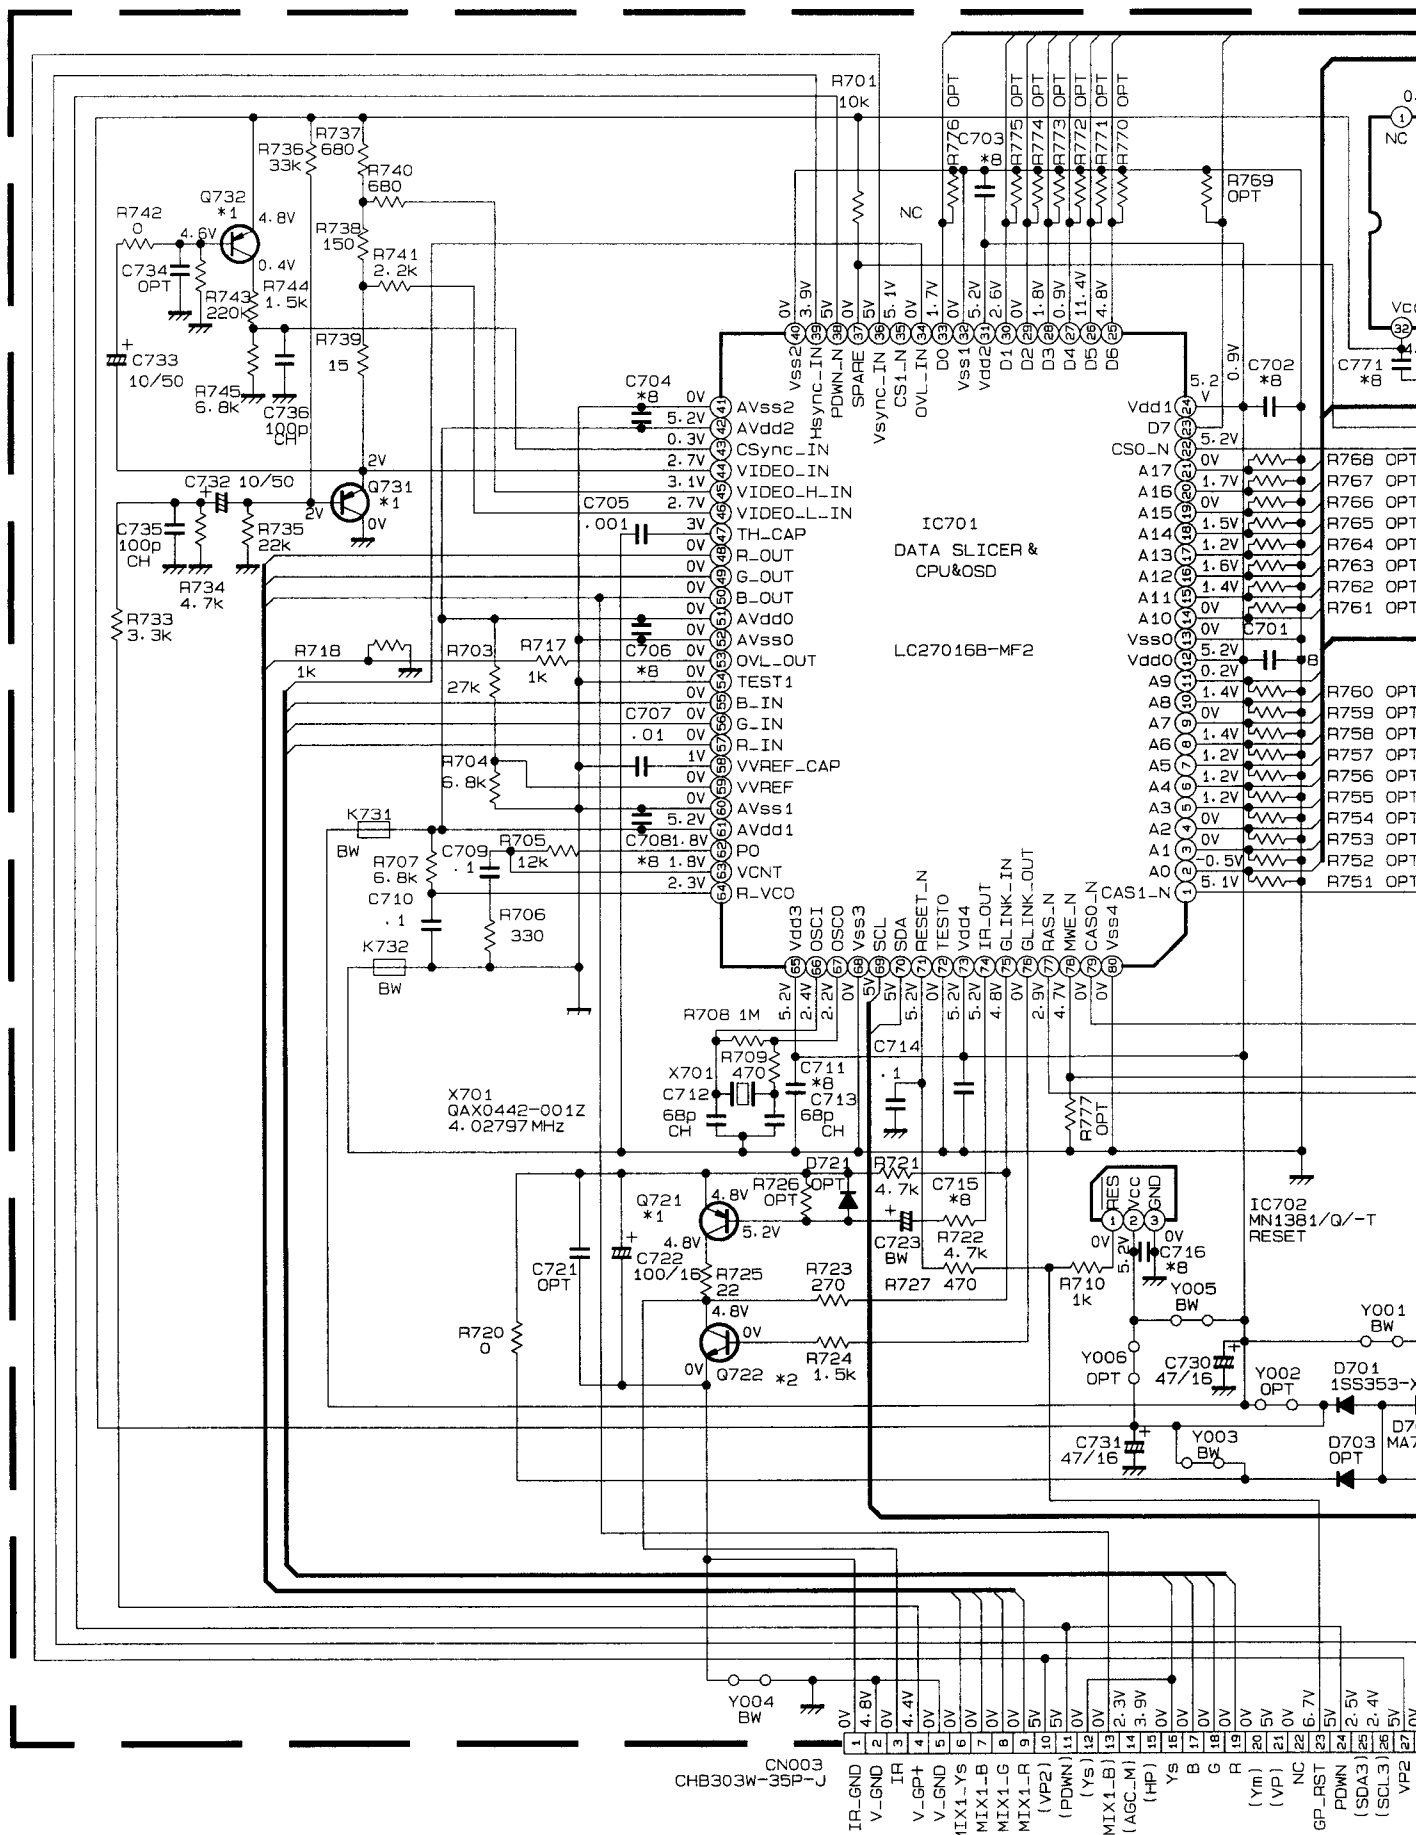GUIDE PLUS + MODULE PWB CIRCUIT DIAGRAM [AV-27980 / AV-27985]

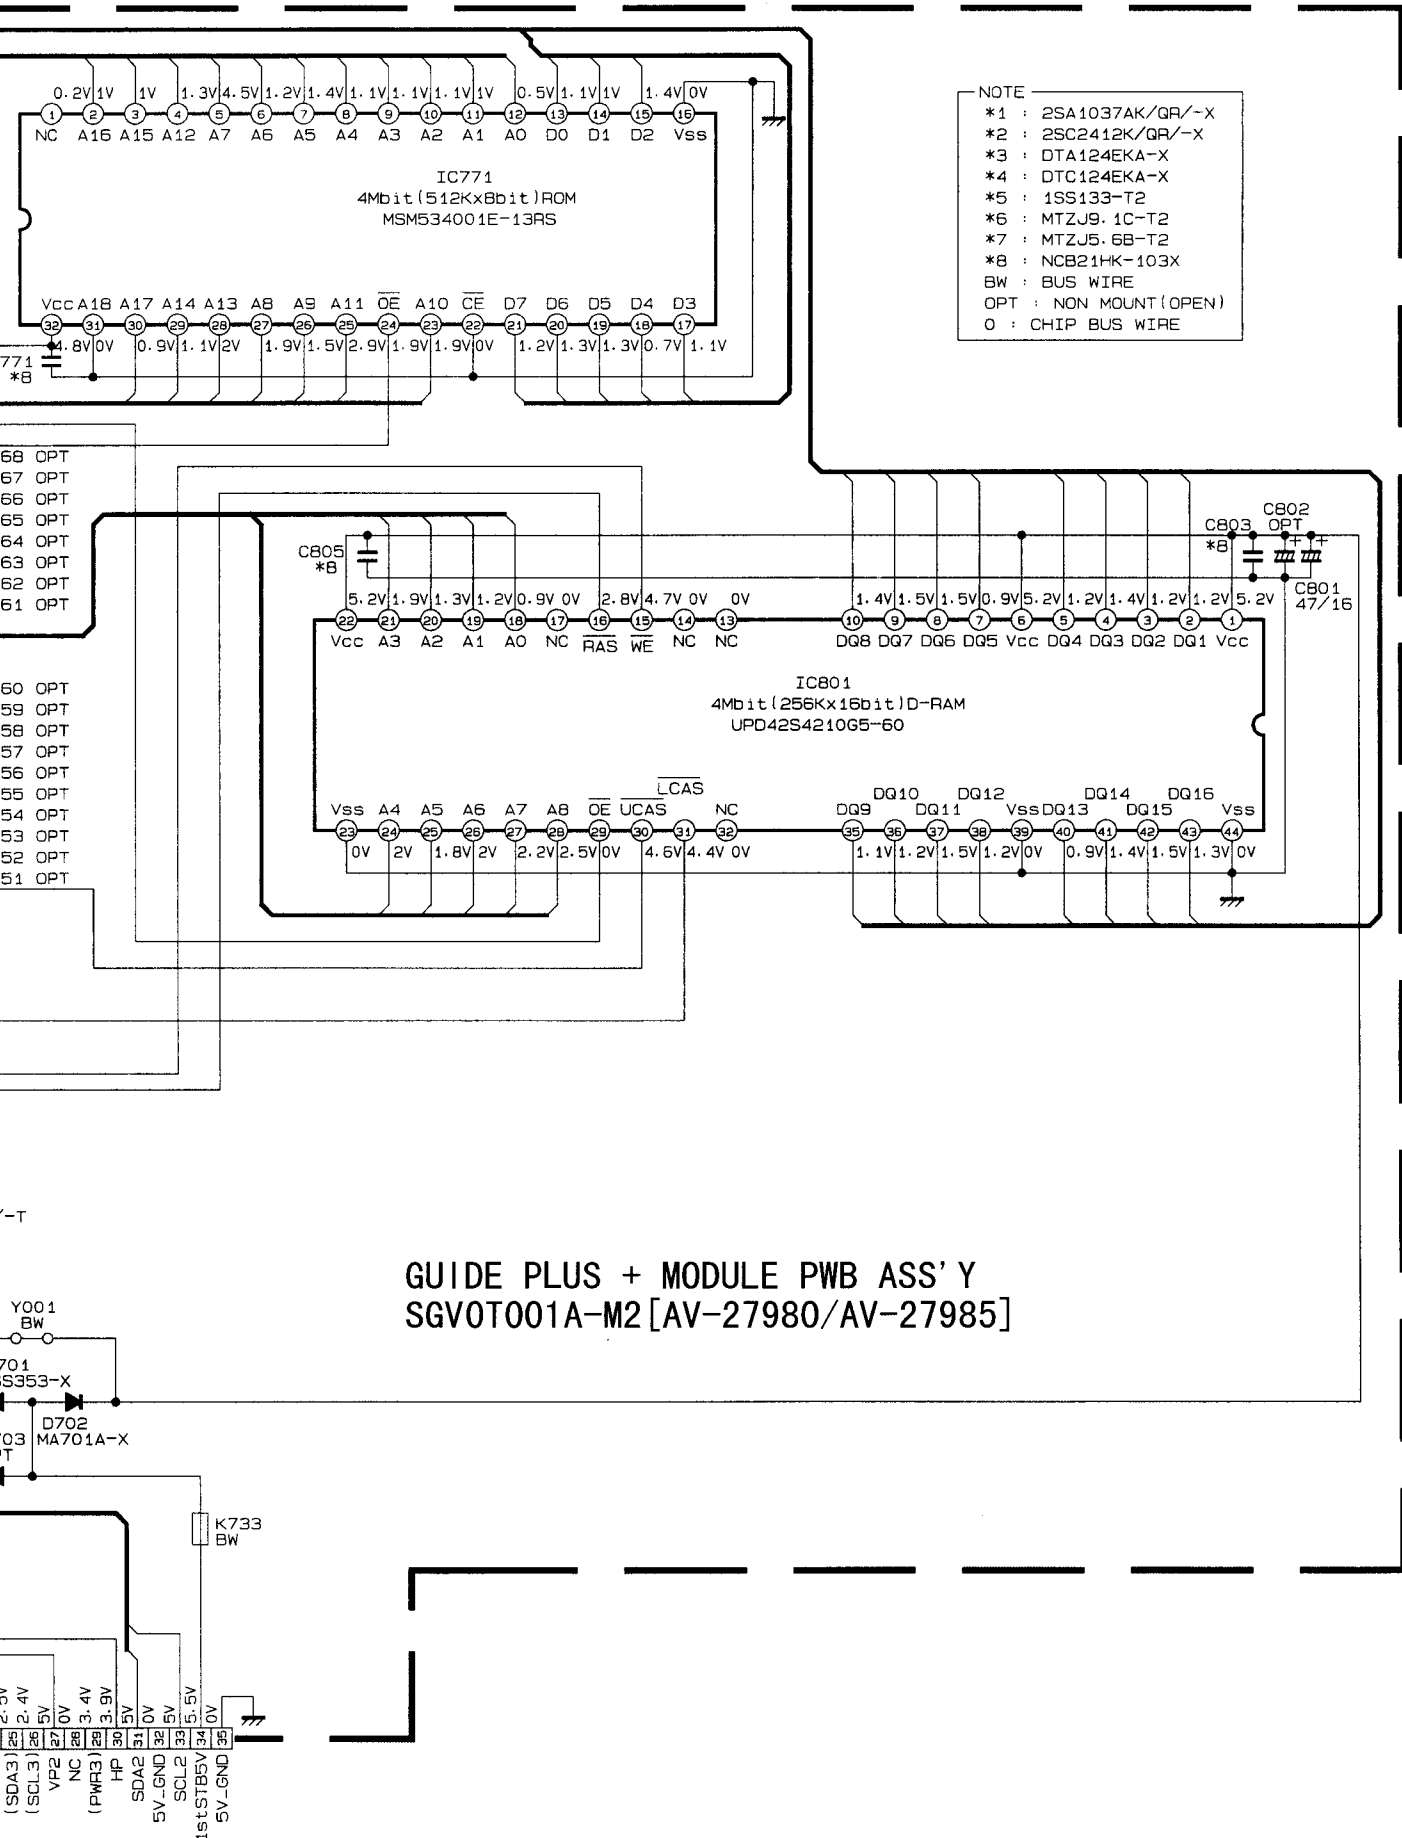

GUIDE PLUS + MODULE PWB ASS'Y
SGVOT001A-M2 [AV-27980/AV-27985]


PATTERN DIAGRAMS MAIN PWB PATTERN


(⊥)

↑ FRONT


TP-91
(B1)


TP-E
(⊥)

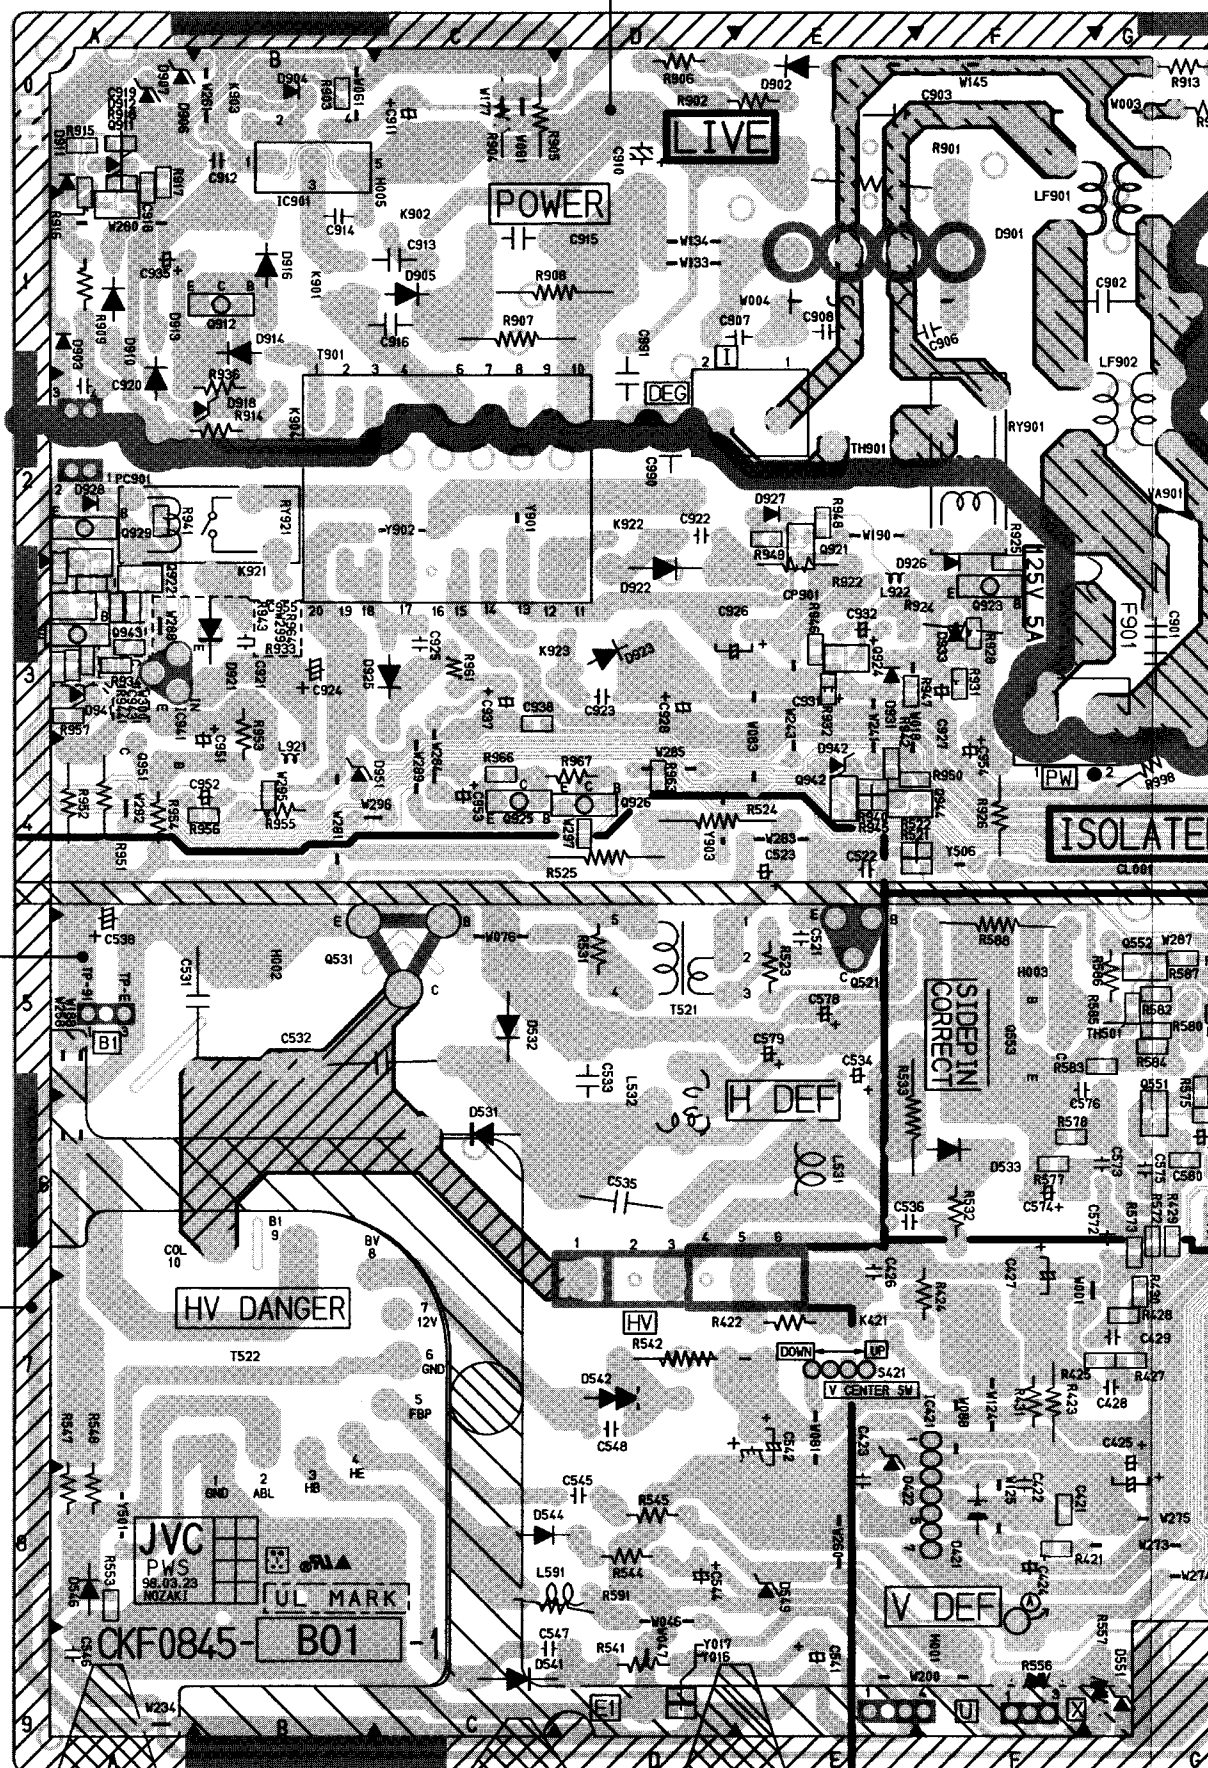

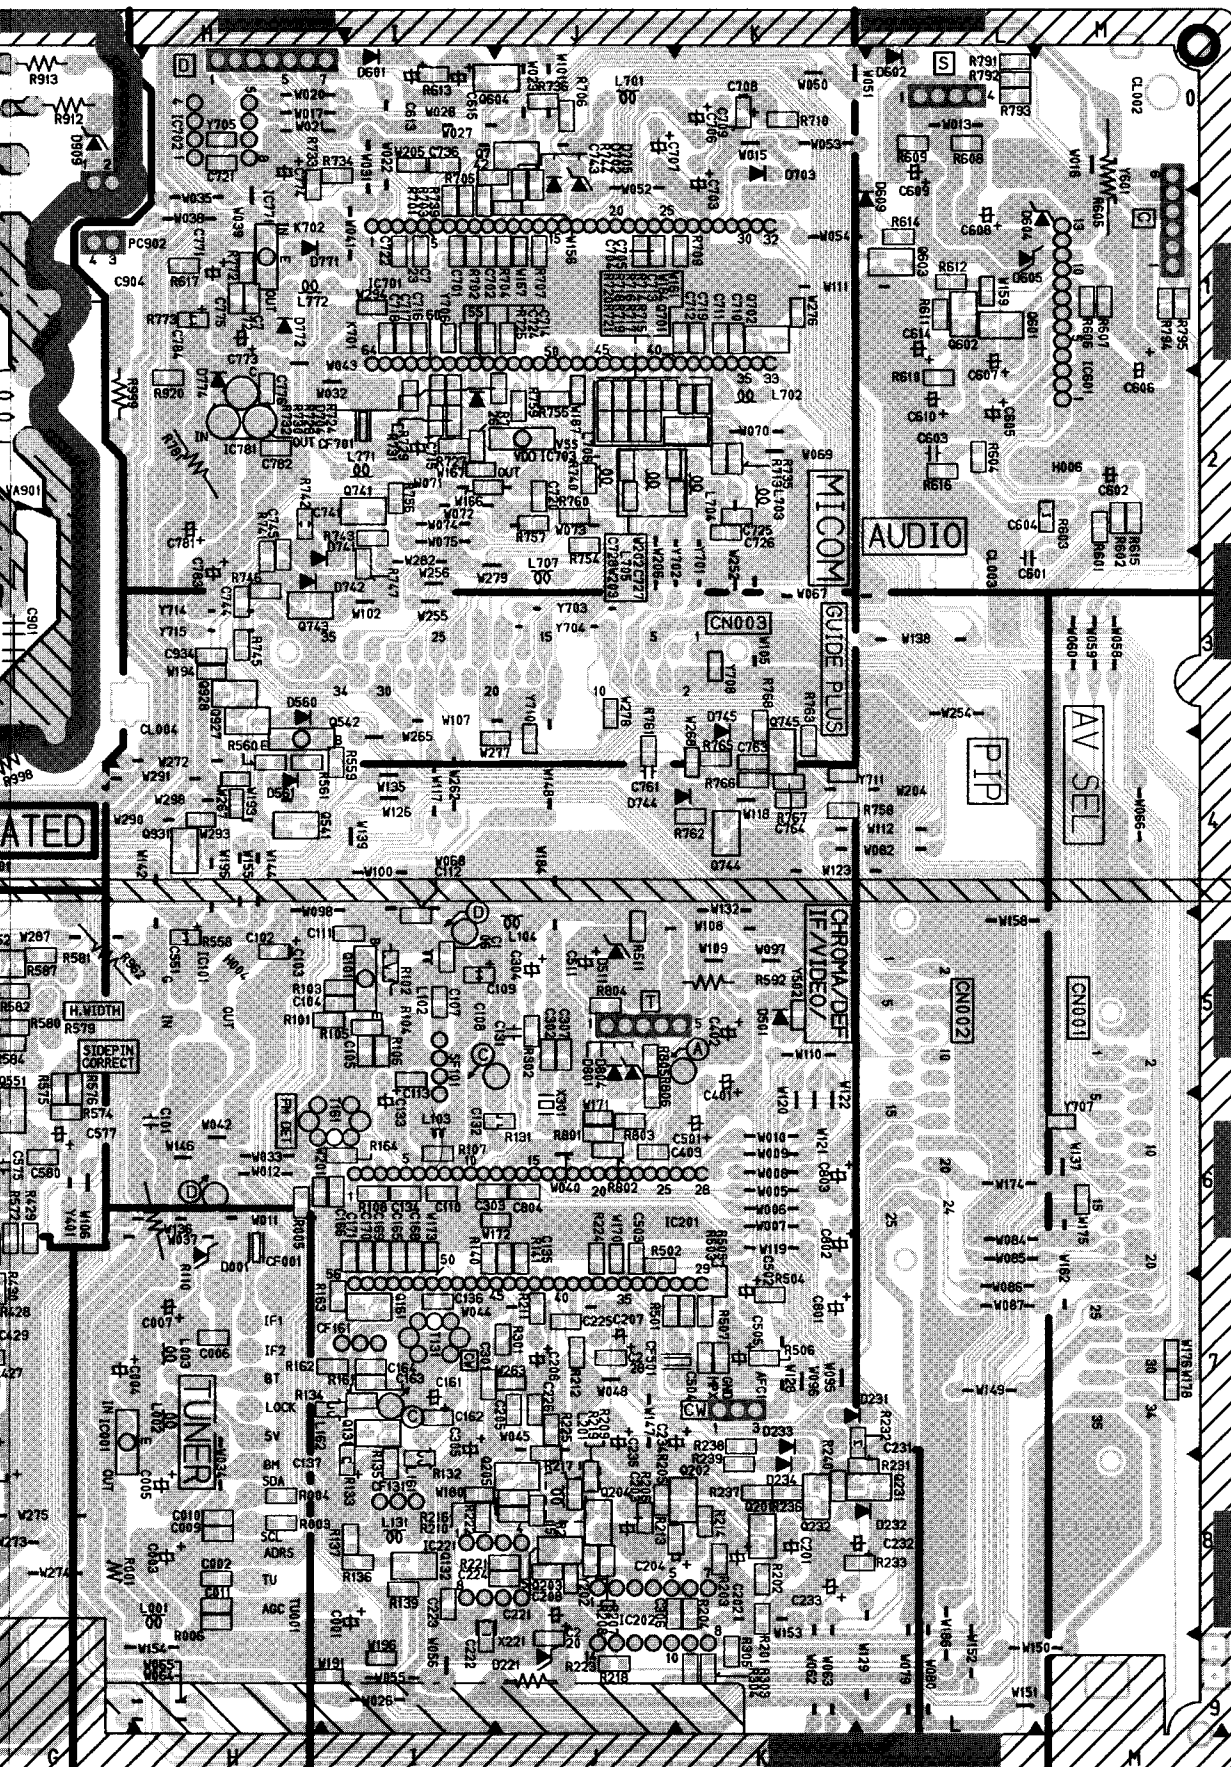


AV SELECTOR PWB PATTERN [AV-27950]

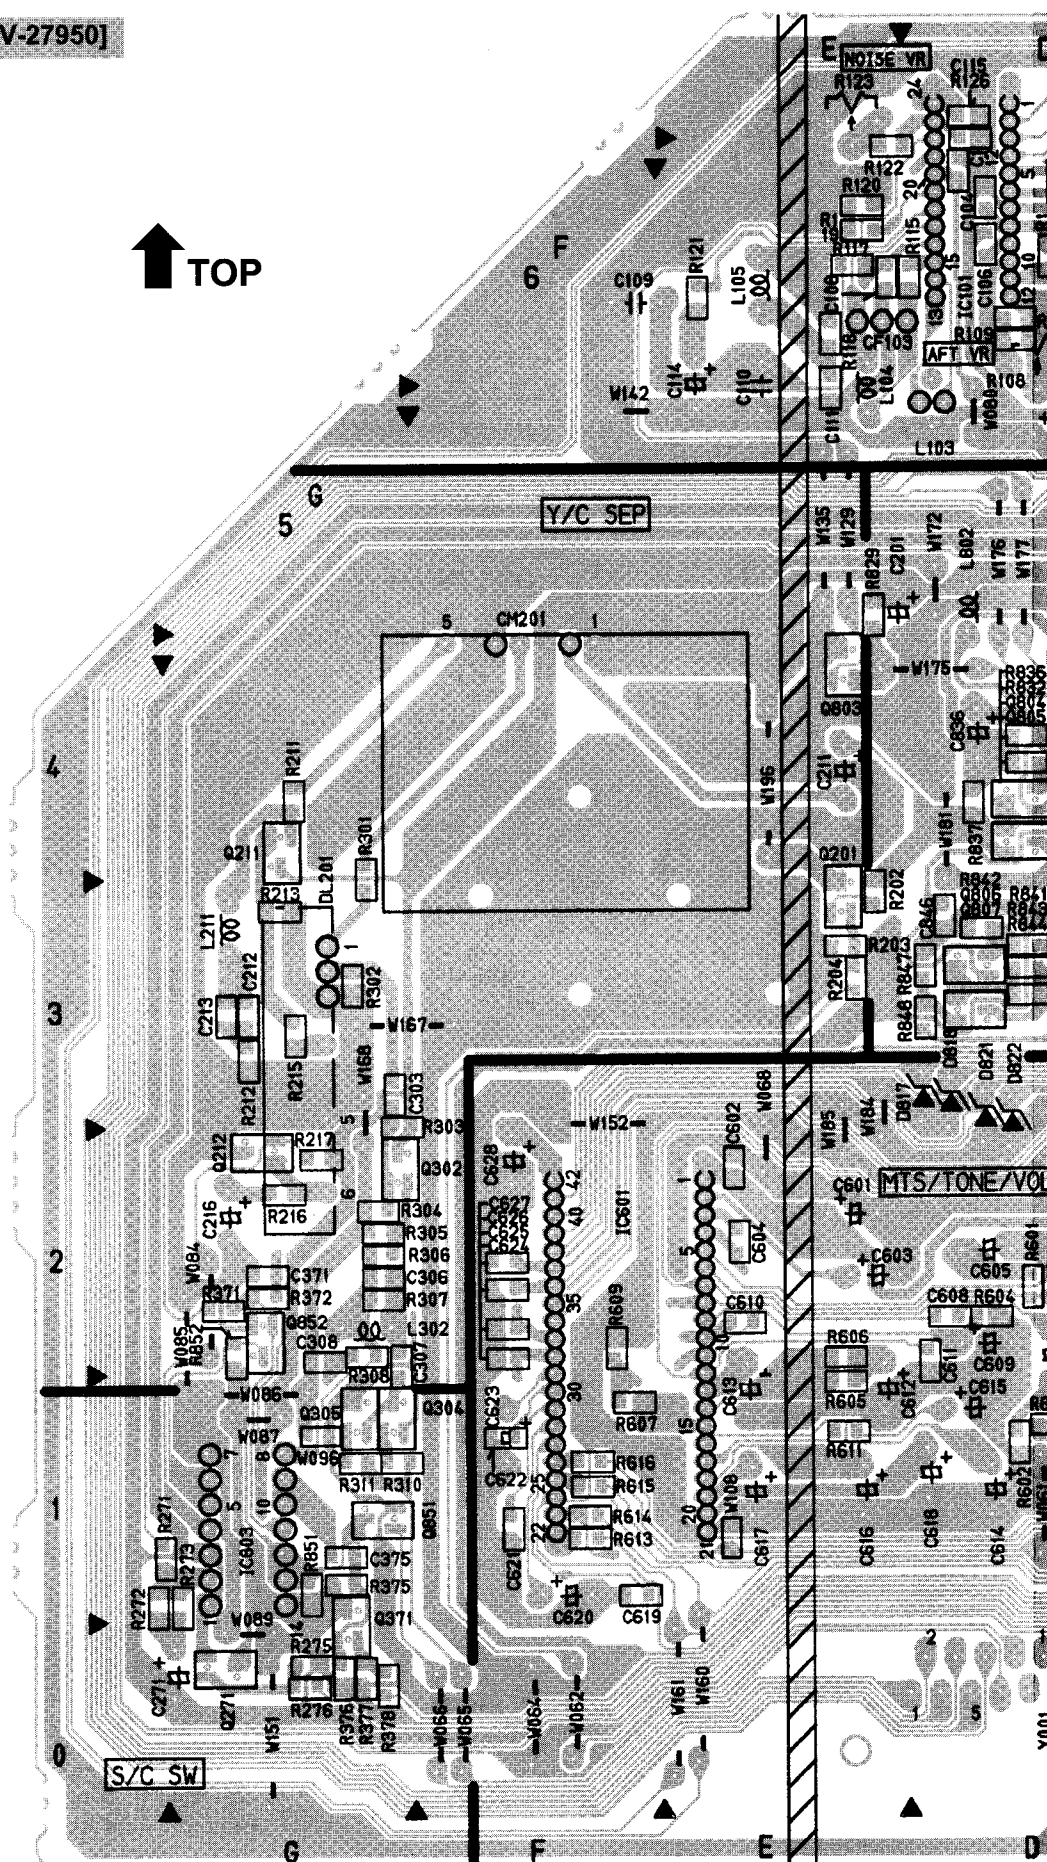


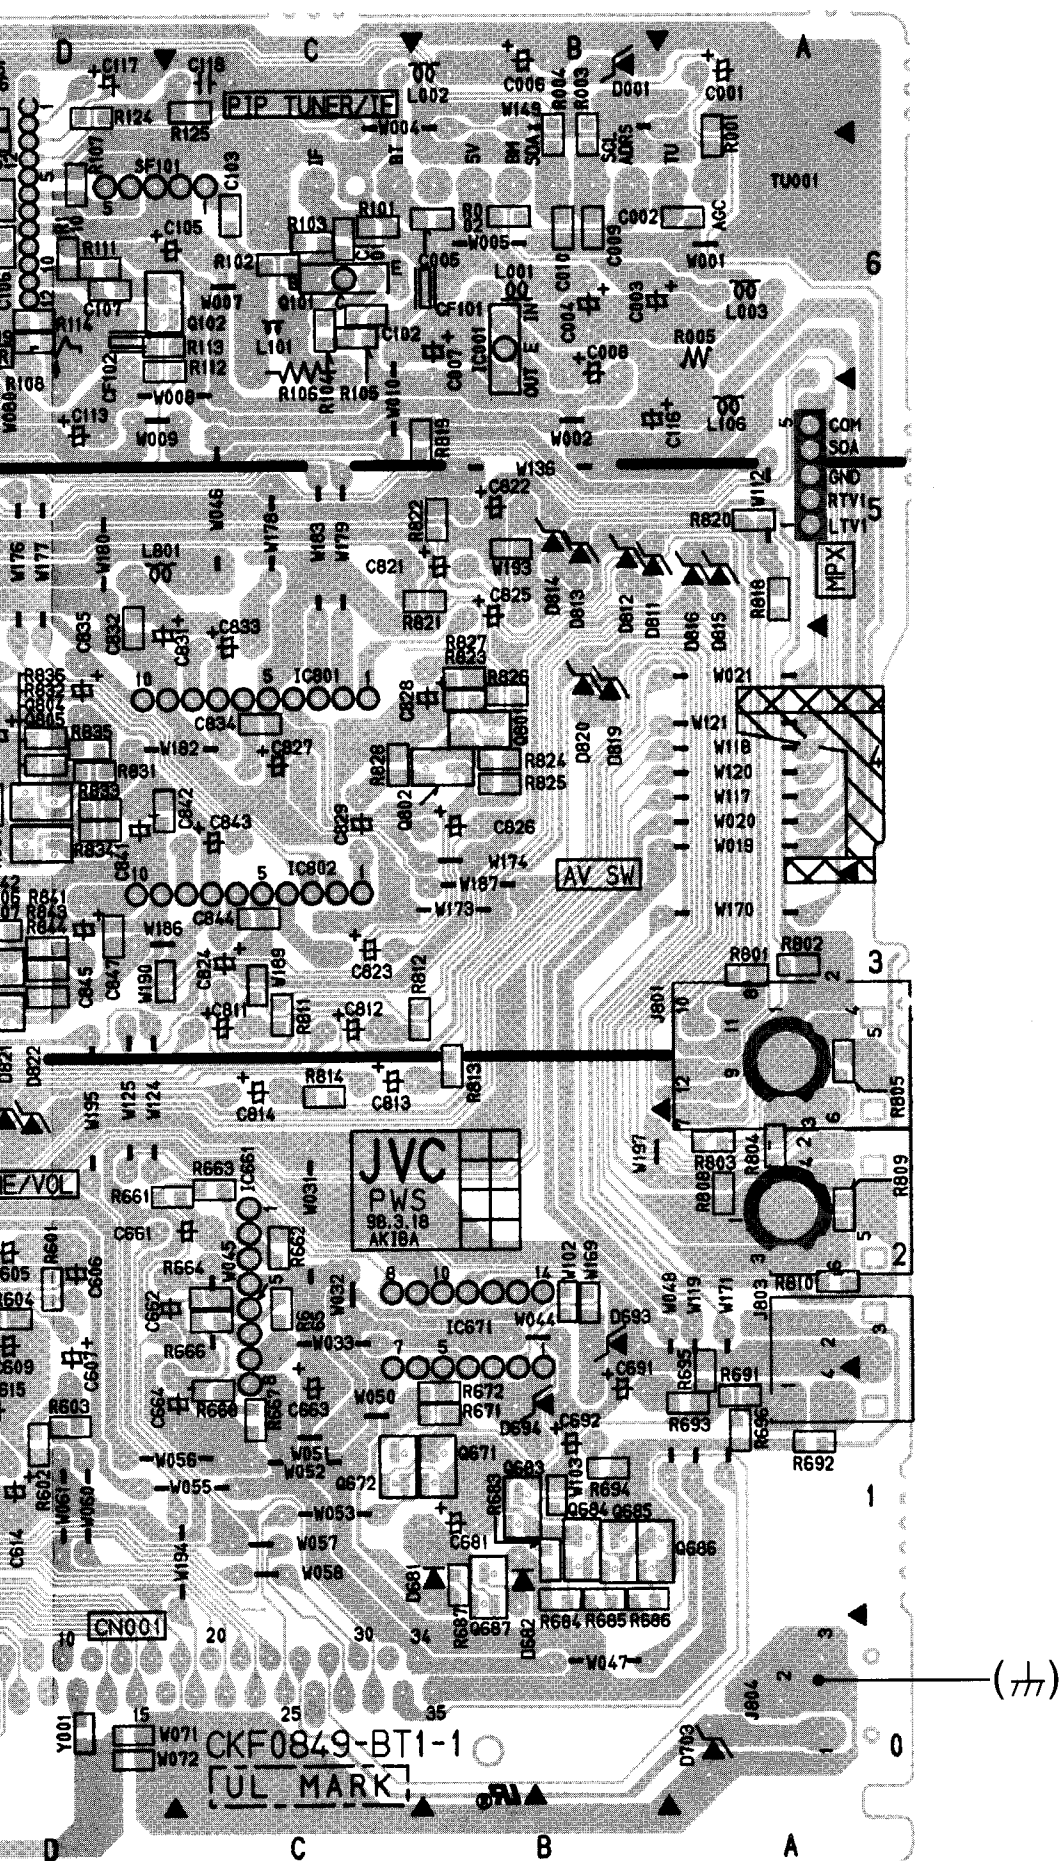



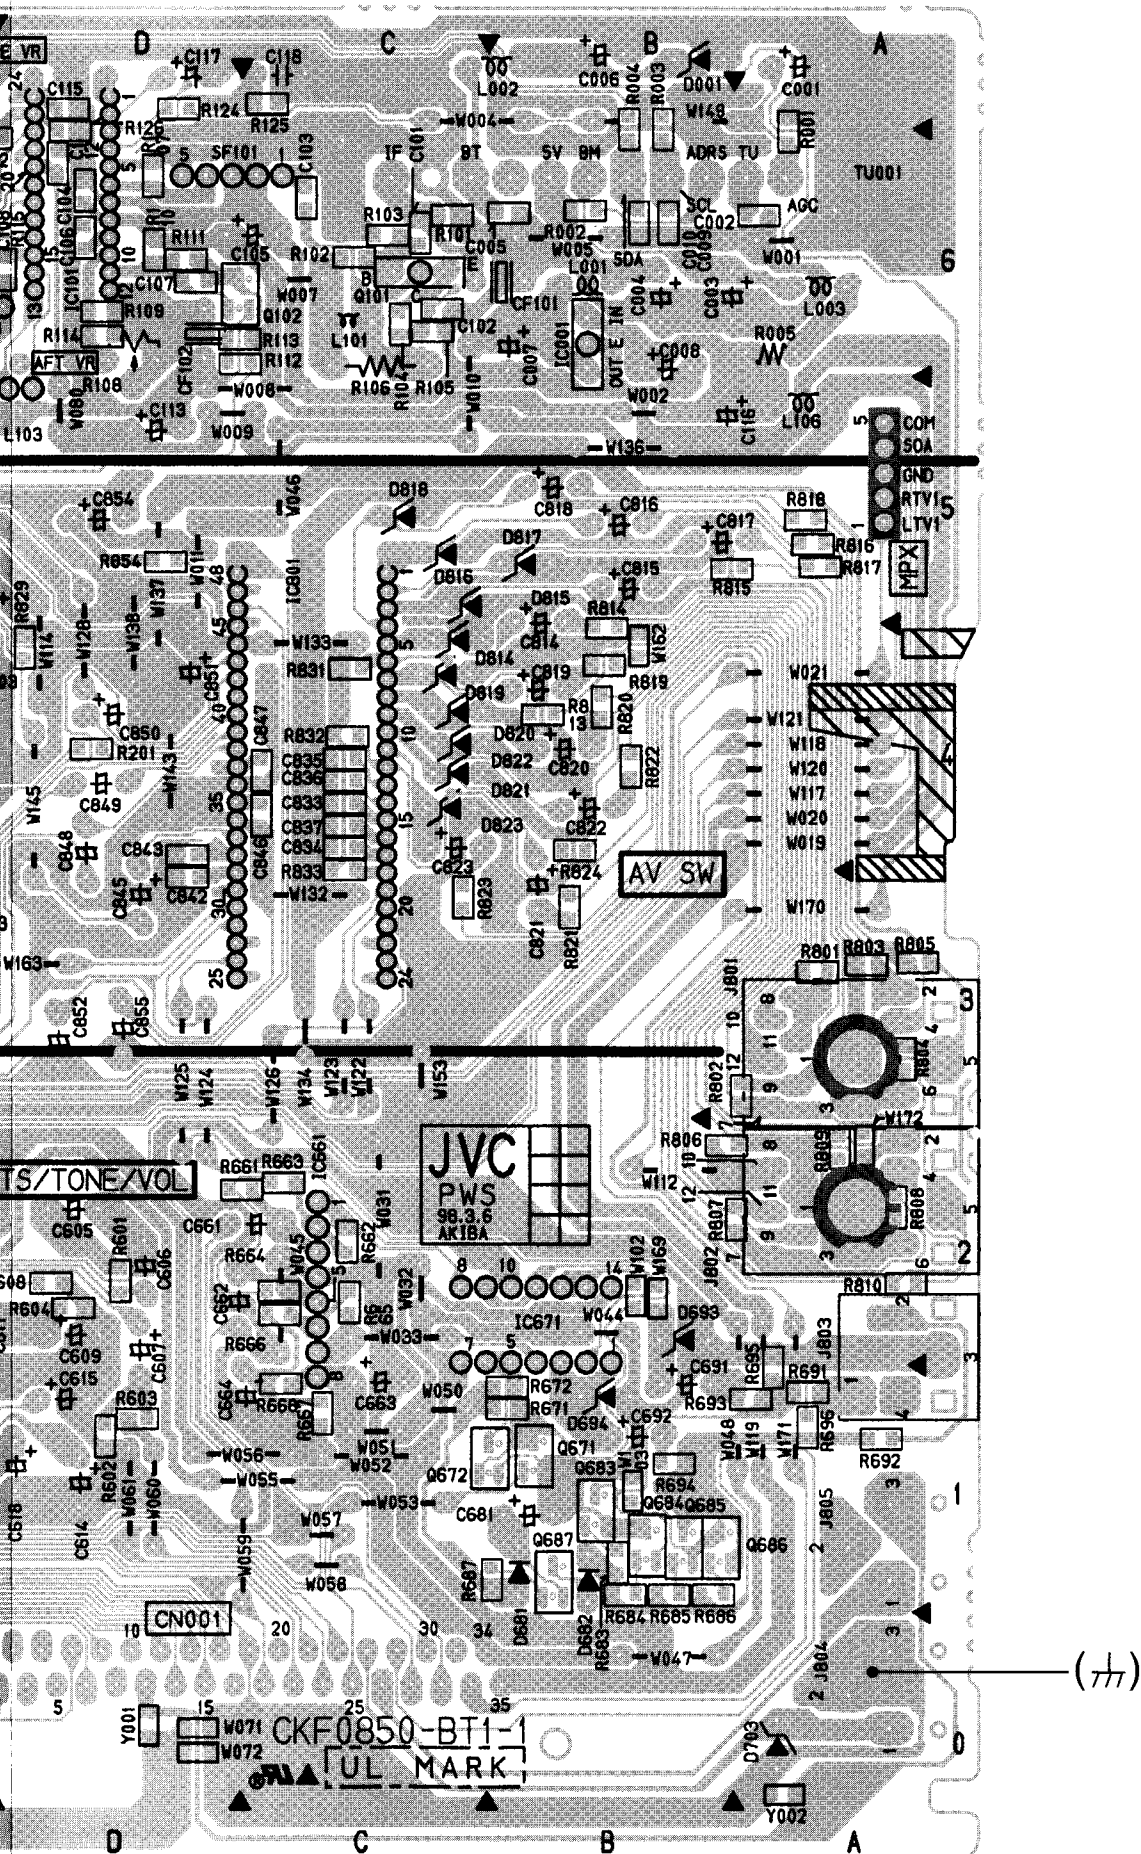


PIP PWB PATTERN

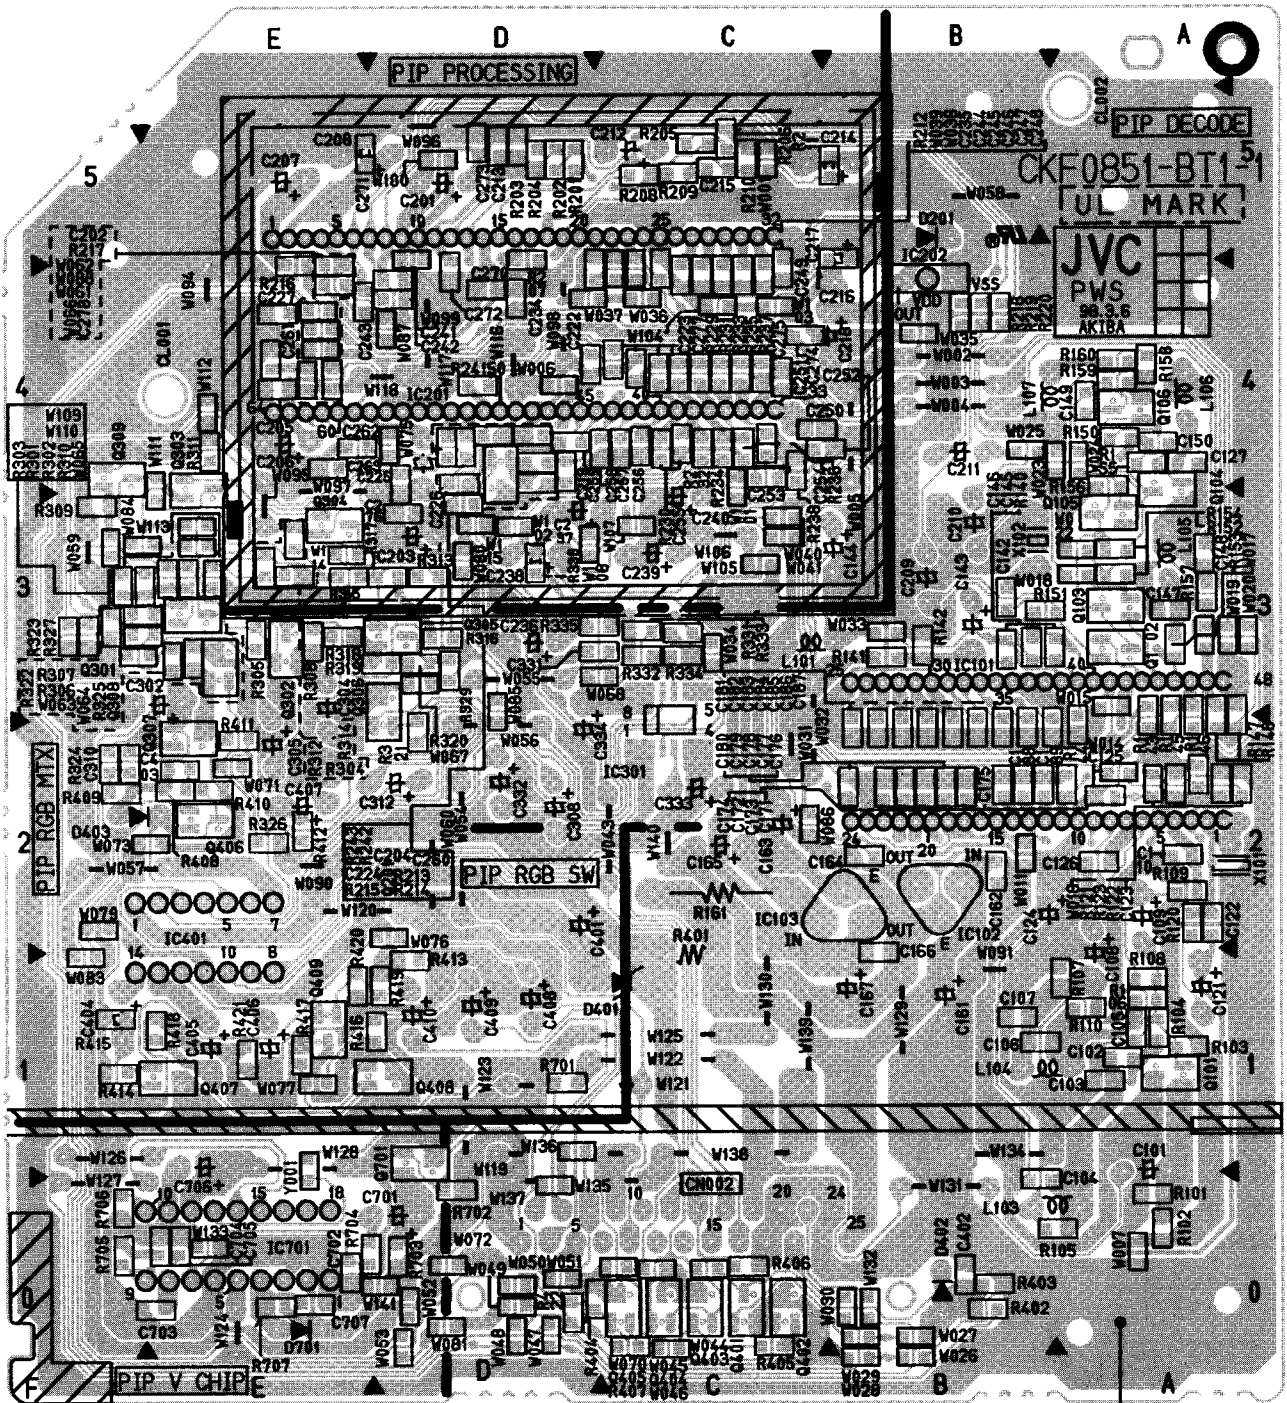


(77)


FRONT CONTROL PWB PATTERN

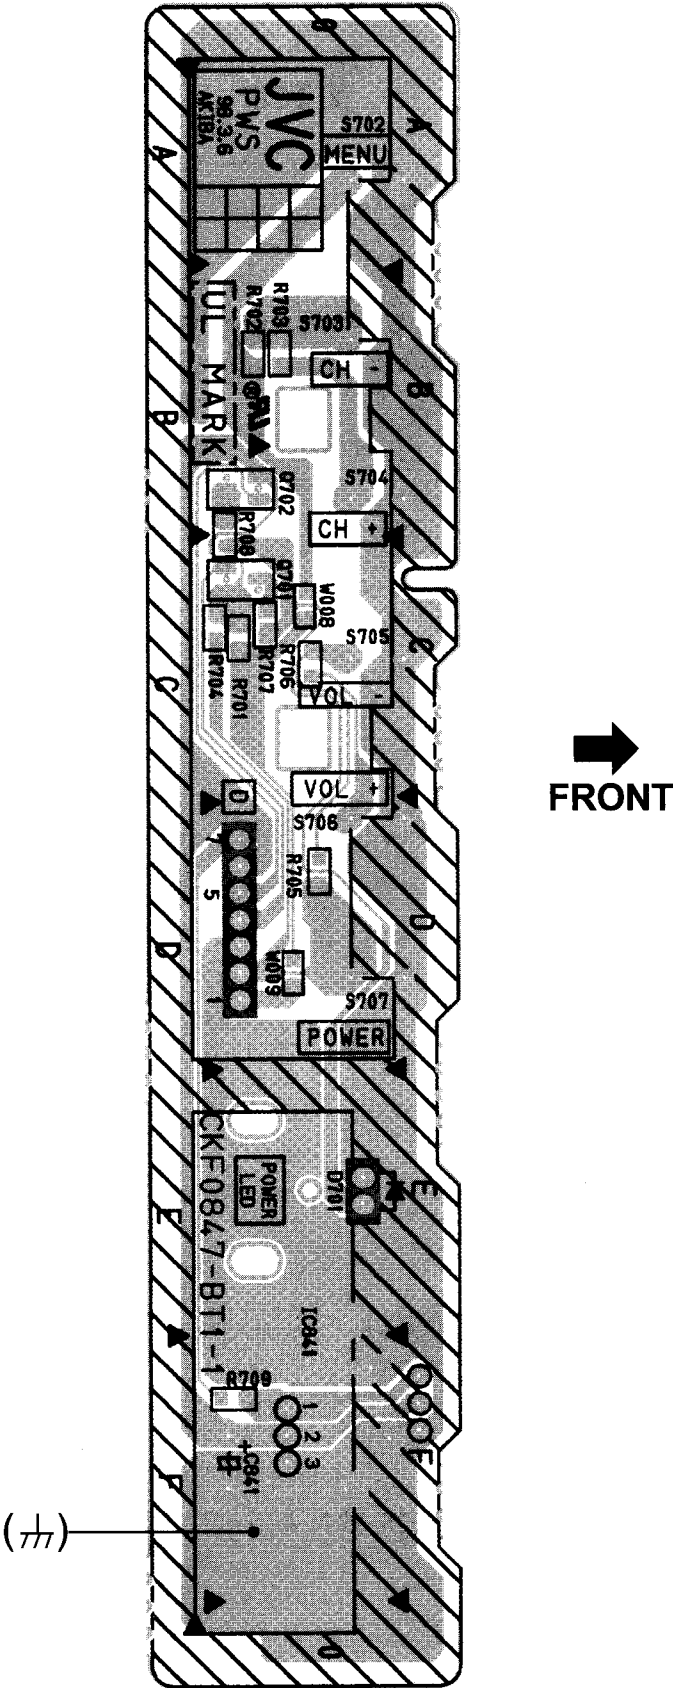

CRT SOCKET PWB PATTERN

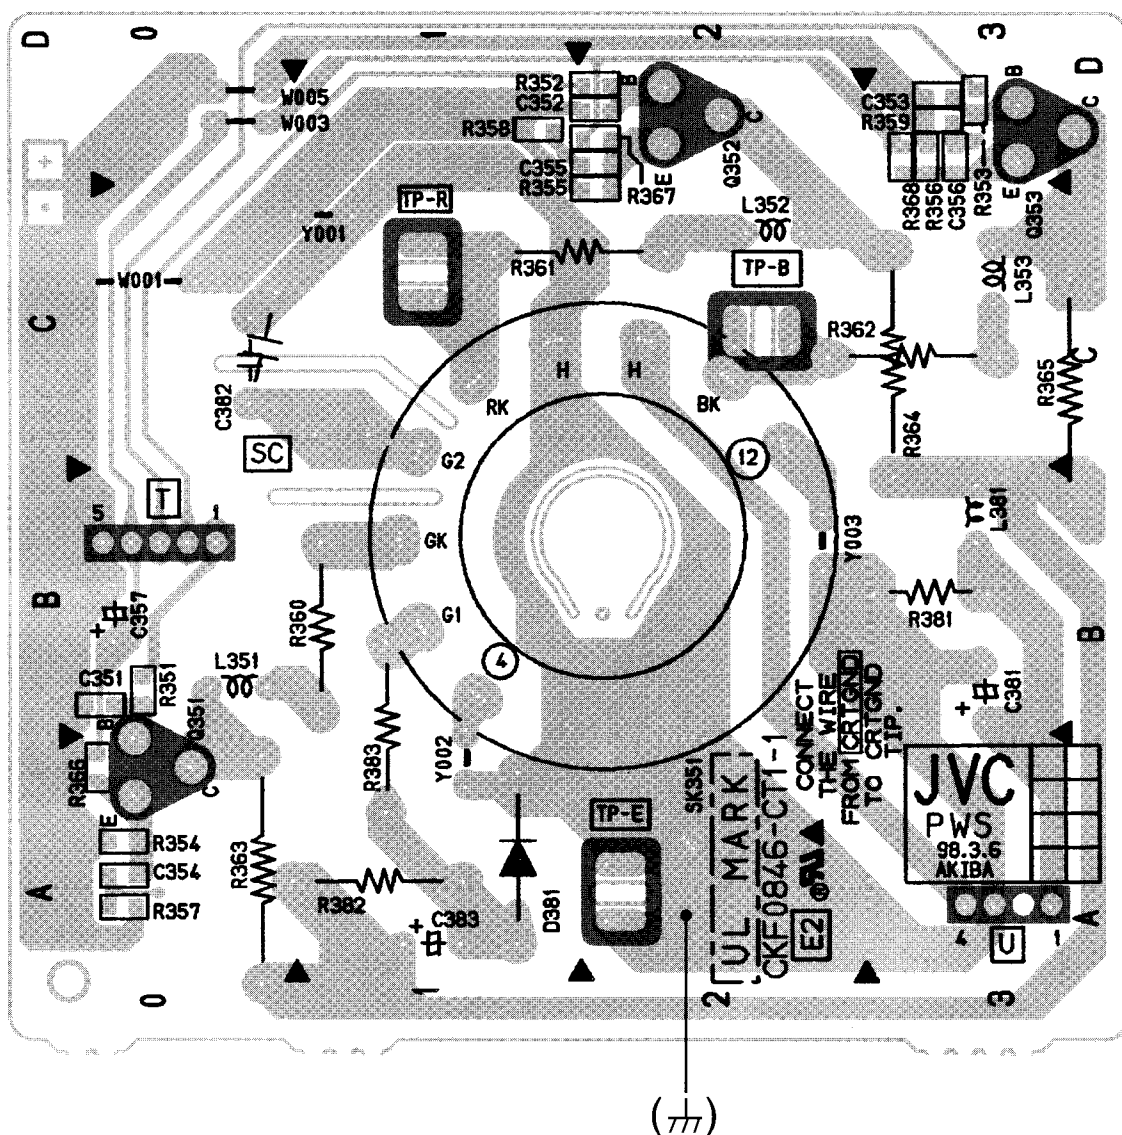

GUIDE PLUS + MODULE PWB PATTERN

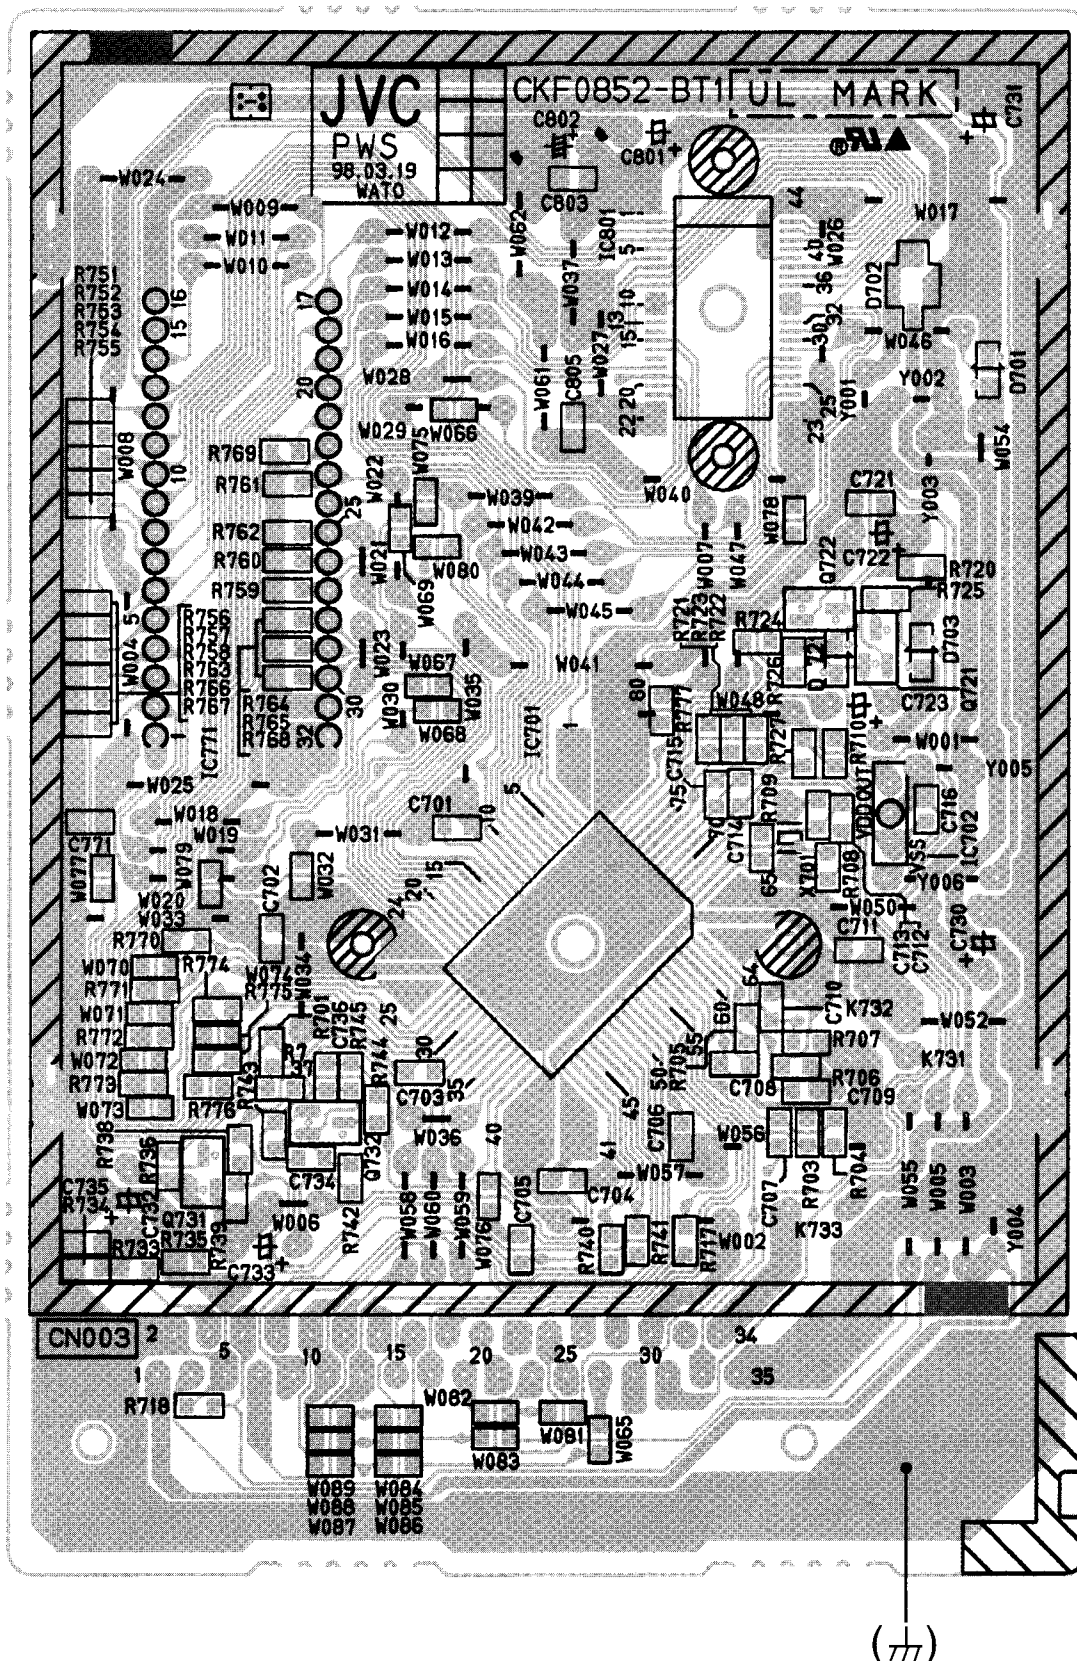

■ CHANNEL CHART (US)

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP	
○	○	VL	02		I
			03		
			04		
			05		
			06		
		VH	07		II
			08		
			09		
			10		
			11		
			12		
			13		
×	○	MID	A	14	I
			B	15	
			C	16	
			D	17	
			E	18	
			F	19	
			G	20	
			H	21	
			I	22	
		SUPER	J	23	II
			K	24	
			L	25	
			M	26	
			N	27	
			O	28	
			P	29	
			Q	30	
			R	31	
			S	32	
			T	33	
			U	34	
			V	35	
			W	36	
		HYPER	W+1	37	IV
			W+2	38	
			W+3	39	
			W+4	40	
			W+5	41	
			W+6	42	
			W+7	43	
			W+8	44	
			W+9	45	
			W+10	46	
			W+11	47	
			W+12	48	
			W+13	49	
			W+14	50	
			W+15	51	
			W+16	52	
			W+17	53	
			W+18	54	
			W+19	55	
			W+20	56	
			W+21	57	
			W+22	58	
			W+23	59	
			W+24	60	
			W+25	61	
			W+26	62	
			W+27	63	
			W+28	64	
		ULTRA	W+29	65	
			W+30	66	
			W+31	67	
			W+32	68	
			W+33	69	
			W+34	70	

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP	
×	○	ULTRA	W+35	71	IV
			W+36	72	
			W+37	73	
			W+38	74	
			W+39	75	
			W+40	76	
			W+41	77	
			W+42	78	
			W+43	79	
			W+44	80	
			W+45	81	
			W+46	82	
			W+47	83	
			W+48	84	
			W+49	85	
			W+50	86	
			W+51	87	
			W+52	88	
			W+53	89	
			W+54	90	
			W+55	91	
			W+56	92	
			W+57	93	
			W+58	94	
			W+59	100	
			W+60	101	
			W+61	102	
		SUB MID	W+62	103	I
			W+63	104	
			W+64	105	
			W+65	106	
			W+66	107	
			W+67	108	
			W+68	109	
			W+69	110	
			W+70	111	
			W+71	112	
			W+72	113	
			W+73	114	
			W+74	115	
			W+75	116	
			W+76	117	
			W+77	118	
			W+78	119	
			W+79	120	
			W+80	121	
			W+81	122	
			W+82	123	
			W+83	124	
			W+84	125	
		UHF	A-8	01	
			A-4	96	
			A-3	97	
			A-2	98	
			A-1	99	
○	×	UHF	14 }	69	IV
TOTAL 180CH { VHF 124CH { UHF 56CH					
NOTE: TO RECEIVE THE SUBSCRIPTION OR PREMIUM PROGRAMMING FROM CERTAIN CABLE COMPANIES. SPECIAL ADAPTERS MAY BE REQUIRED.					

CHANNEL CHART (CA)

MODE		BAND	CHANNEL		TUNER BAND	
TV	CATV		REAL	DISP.		
○	○	VL	02		I	
			03			
			04			
			05			
			06			
		VH	07			
			08			
			09			
			10			
			11			
12						
13						
×	○	MID	A	14	II	
			B	15		
			C	16		
			D	17		
			E	18		
			F	19		
			G	20		
			H	21		
			I	22		
		SUPER	J	23		
			K	24		
			L	25		
			M	26		
			N	27		
			O	28		
			P	29		
			Q	30		
			R	31		
			S	32		
		T	33			
		U	34			
		V	35			
		W	36			
		HYPER	W+1	37	III	
			W+2	38		
			W+3	39		
			W+4	40		
			W+5	41		
			W+6	42		
			W+7	43		
			W+8	44		
			W+9	45		
			W+10	46		
			W+11	47		
			W+12	48		
			W+13	49		
			W+14	50		
			W+15	51		
			W+16	52		
			W+17	53		
			W+18	54		
			W+19	55		
			W+20	56		
			W+21	57		
			W+22	58		
			W+23	59		
			W+24	60		
			W+25	61		
			W+26	62		
			W+27	63		
			W+28	64		
		ULTRA	W+29	65	IV	
			W+30	66		
			W+31	67		
			W+32	68		
			W+33	69		
			W+34	70		

MODE		BAND	CHANNEL		TUNER BAND
TV	CATV		REAL	DISP	
×	○	ULTRA	W+35	71	IV
			W+36	72	
			W+37	73	
			W+38	74	
			W+39	75	
			W+40	76	
			W+41	77	
			W+42	78	
			W+43	79	
			W+44	80	
			W+45	81	
			W+46	82	
			W+47	83	
			W+48	84	
			W+49	85	
			W+50	86	
			W+51	87	
			W+52	88	
			W+53	89	
			W+54	90	
			W+55	91	
			W+56	92	
			W+57	93	
			W+58	94	
			W+59	100	
			W+60	101	
			W+61	102	
			W+62	103	
			W+63	104	
			W+64	105	
			W+65	106	
			W+66	107	
			W+67	108	
			W+68	109	
			W+69	110	
			W+70	111	
			W+71	112	
			W+72	113	
			W+73	114	
			W+74	115	
			W+75	116	
			W+76	117	
			W+77	118	
			W+78	119	
			W+79	120	
W+80	121				
W+81	122				
W+82	123				
W+83	124				
W+84	125				
		SUB MID	A-8	01	I
			A-4	96	
			A-3	97	II
			A-2	98	
	○	×	UHF	14	IV
				5	
				69	
TOTAL 180CH { VHF 124CH UHF 56CH					
NOTE: TO RECEIVE THE SUBSCRIPTION OR PREMIUM PROGRAMMING FROM CERTAIN CABLE COMPANIES. SPECIAL ADAPTERS MAY BE REQUIRED.					

PARTS LIST

CAUTION

- The parts identified by the Δ symbol are important for the safety . Whenever replacing these parts, be sure to use specified ones to secure the safety .
- The parts not indicated in this Parts List and those which are filled with lines --- in the Parts No. columns will not be supplied .
- P. W. Board Ass'y will not be supplied, but those which are filled with the Parts No. in the Parts No. columns will be supplied .

ABBREVIATIONS OF RESISTORS, CAPACITORS AND TOLERANCES

RESISTORS		CAPACITORS	
C R	Carbon Resistor	C CAP.	Ceramic Capacitor
F R	Fusible Resistor	E CAP.	Electrolytic Capacitor
P R	Plate Resistor	M CAP.	Mylar Capacitor
V R	Variable Resistor	HV CAP.	High Voltage Capacitor
HV R	High Voltage Resistor	MF CAP.	Metalized Film Capacitor
MF R	Metal Film Resistor	MM CAP.	Metalized Mylar Capacitor
MG R	Metal Glazed Resistor	MP CAP.	Metalized Polystyrol Capacitor
MP R	Metal Plate Resistor	PP CAP.	Polypropylene Capacitor
OM R	Metal Oxide Film Resistor	PS CAP.	Polystyrol Capacitor
CMF R	Coating Metal Film Resistor	TF CAP.	Thin Film Capacitor
UNF R	Non-Flammable Resistor	MPP CAP.	Metalized Polypropylene Capacitor
CH V R	Chip Variable Resistor	TAN. CAP.	Tantalum Capacitor
CH MG R	Chip Metal Glazed Resistor	CH C CAP.	Chip Ceramic Capacitor
COMP. R	Composition Resistor	BP E CAP.	Bi-Polar Electrolytic Capacitor
LPTC R	Linear Positive Temperature Coefficient Resistor	CH AL E CAP.	Chip Aluminum Electrolytic Capacitor
		CH AL BP CAP.	Chip Aluminum Bi-Polar Capacitor
		CH TAN. E CAP.	Chip Tantalum Electrolytic Capacitor
		CH AL BP E CAP.	Chip Tantalum Bi-Polar Electrolytic Capacitor

TOLERANCES									
F	G	J	K	M	N	R	H	Z	P
±1%	±2%	±5%	±10%	±20%	±30%	+30% -10%	+50% -10%	+80% -20%	+100% 0%

CONTENTS

■ USING P.W. BOARD & REMOTE CONTROL UNIT	31
--	----

[AV-27950 (US&CA)]

■ EXPLODED VIEW PARTS LIST	32
■ EXPLODED VIEW	33
■ PRINTED WIRING BOARD PARTS LIST	
● MAIN PW BOARD ASS'Y	34
● CRT SOCKET PW BOARD ASS'Y	37
● FRONT CONTROL PW BOARD ASS'Y	38
● AV SELECTOR PW BOARD ASS'Y	38
● PIP PW BOARD ASS'Y	40
■ REMOTE CONTROL UNIT PARTS LIST	42
■ PACKING	43
■ PACKING PARTS LIST	43

[AV-27980 (US&CA)]

■ EXPLODED VIEW PARTS LIST	44
■ EXPLODED VIEW	45
■ PRINTED WIRING BOARD PARTS LIST	
● MAIN PW BOARD ASS'Y	46
● CRT SOCKET PW BOARD ASS'Y	50
● FRONT CONTROL PW BOARD ASS'Y	50
● AV SELECTOR PW BOARD ASS'Y	50
● PIP PW BOARD ASS'Y	52
● GUIDE PLUS + MODULE PW BOARD ASS'Y	52
■ REMOTE CONTROL UNIT PARTS LIST	52
■ PACKING	53
■ PACKING PARTS LIST	53

[AV-27985 (US&CA)]

■ EXPLODED VIEW PARTS LIST	54
■ EXPLODED VIEW	55
■ PRINTED WIRING BOARD PARTS LIST	
● MAIN PW BOARD ASS'Y	56
● CRT SOCKET PW BOARD ASS'Y	56
● FRONT CONTROL PW BOARD ASS'Y	56
● AV SELECTOR PW BOARD ASS'Y	56
● PIP PW BOARD ASS'Y	56
● GUIDE PLUS + MODULE PW BOARD ASS'Y	56
■ REMOTE CONTROL UNIT PARTS LIST	56
■ PACKING	57
■ PACKING PARTS LIST	57


USING P.W. BOARD & REMOTE CONTROL UNIT

P.W.B ASS'Y \ Model	AV-27950 (US&CA)	AV-27980 (US&CA)	AV-27985 (US&CA)
MAIN P.W.B	SGV-1001A-M2	SGV-1005A-M2	←
CRT SOCKET P.W.B	SGV-3001A-M2	SGV-3003A-M2	←
FRONT CONTROL P.W.B	SGV-4001A-M2	←	←
AV SELECTOR P.W.B	SGV-8001A-M2	SGV-8003A-M2	←
PIP P.W.B	SGV0P001A-M2	←	←
GUIDE PLUS + MODULE P.W.B	X	SGV0T001A-M2	←
REMOTE CONTROL UNIT	RM-C755-1C	RM-C752-1C	RM-C888-1A

AV-27950 (US&CA)**EXPLODED VIEW PARTS LIST**

△ Ref.No.	Part No.	Part Name	Description	Local
△ L01	CE41329-00DJB	DEG COIL		*
△ V01	A68ADT25X01	ITC TUBE(C)	(Inc.DY)	*
△ T1522	QQH0032-001	FBT	(Within MAIN PWB)	*
△ 1	CM12919-A01-MA	FRONT CABINET		*
2	CHGB0015-0B	BRAIDED WIRE		*
3	CHGB0016-0C	BRAIDED SUB WIRE		*
△ 4	CEB5S12D-04KJ2	SPEAKER	(×2)SP01,SP02	*
5	CM36568-B01-VA	PUSH KNOB		*
6	CM12689-B01-VA	CHASSIS BASE		*
7	CEGA008-001	ANT.SPLITTER		*
△ 8	CM48140-A03-A	CORD CLAMP		*
△ 9	QMPD070-200-JC	POWER CORD	(SERVICE)	
△ 10	LC20087-002B-A	TERMINAL BOARD		*
11	SB5B3010Z	TAPPING SCREW	(×3)	*
△ 12	CM12920-D01-MA	REAR COVER		*
13	GB5B4016Z	TAPPING SCREW	(×9)	*
△ 14	CM22999-001-A	RATING LABEL	(CA)	*
△ 14	CM23034-001-A	RATING LABEL	(US)	*
15	CM35983-001-H	REMOCON WINDOW		*
16	CM48006-A03-H	JVC MARK		*

EXPLODED VIEW

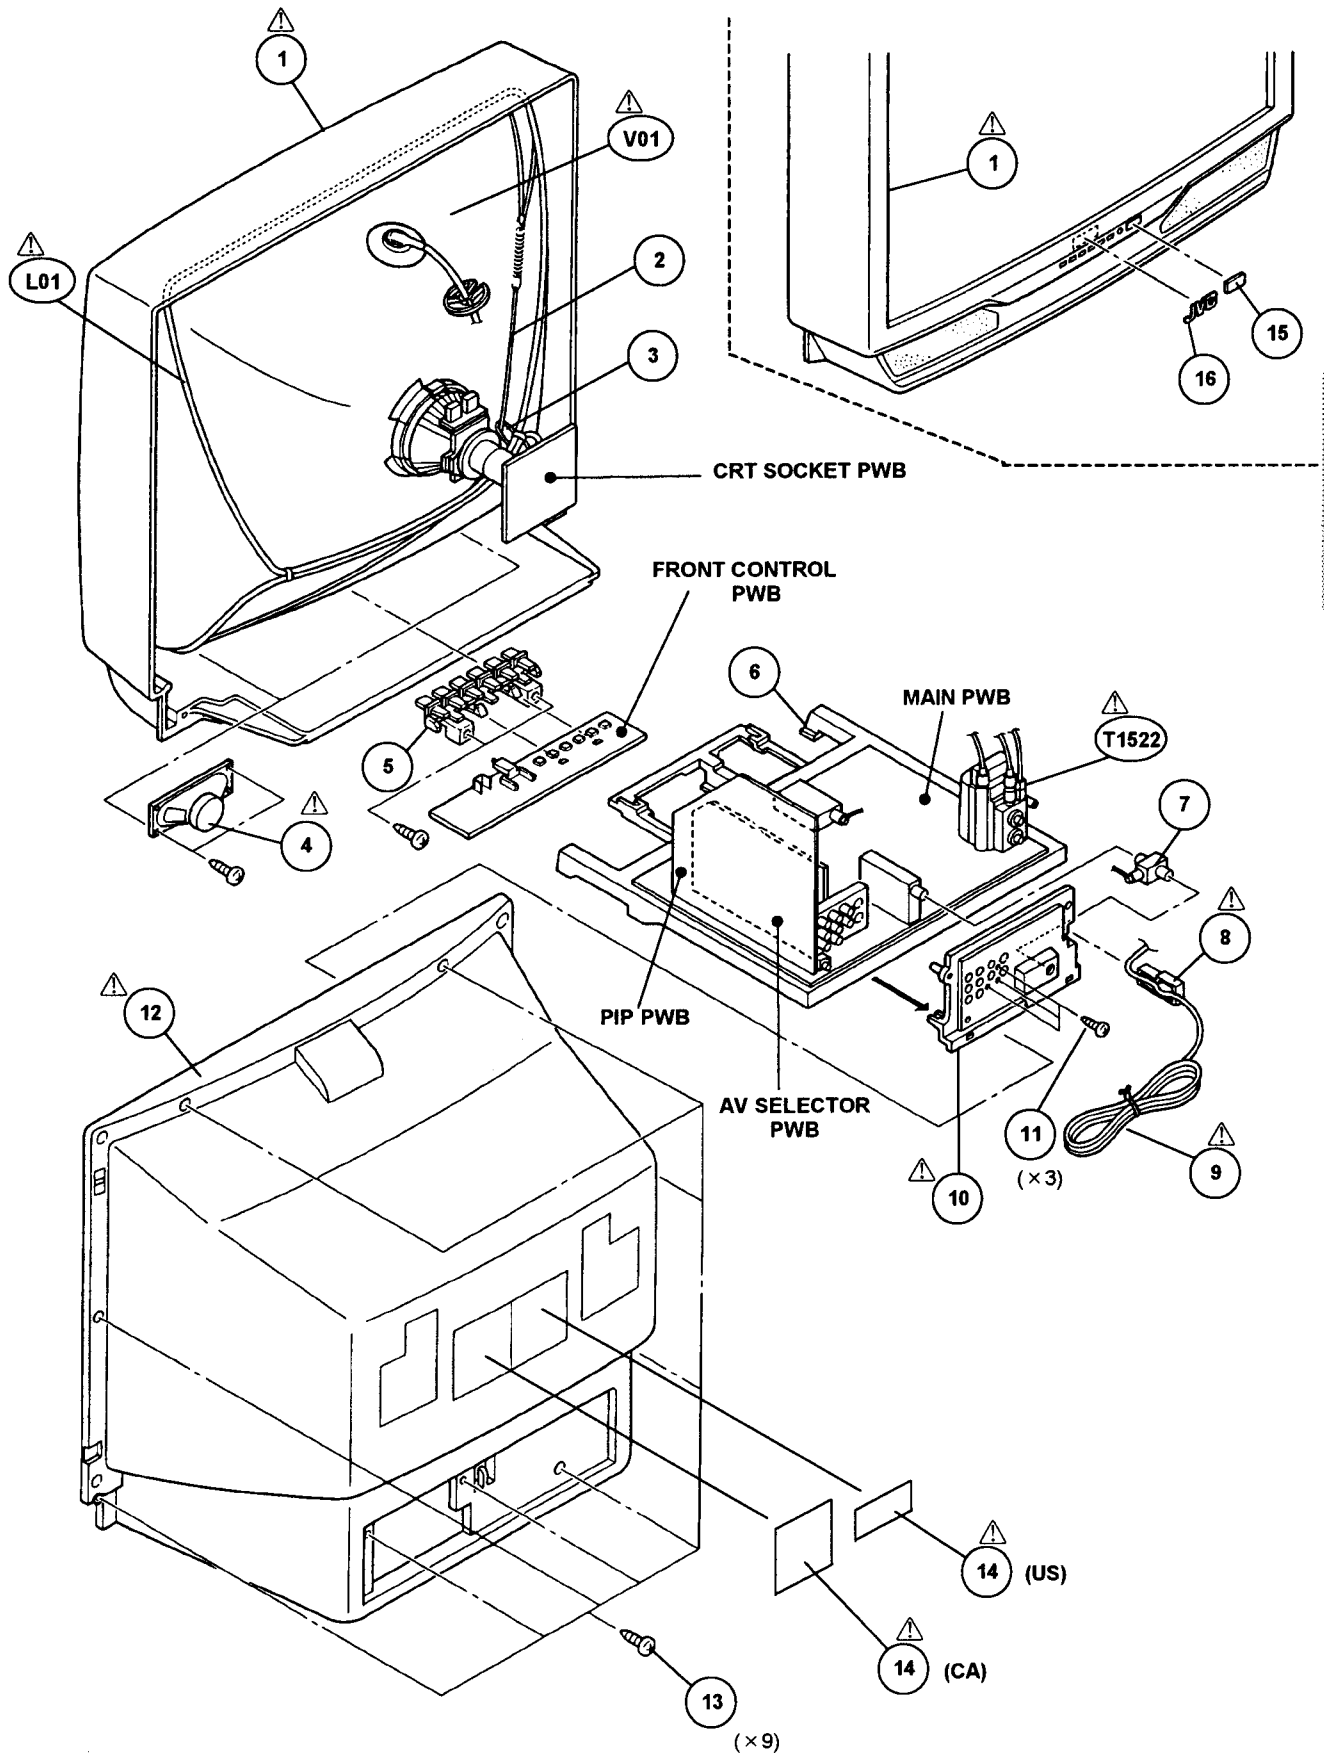

AV-27950

PRINTED WIRING BOARD PARTS LIST

MAIN P.W. BOARD ASS'Y (SGV-1001A-M2)

Symbol No.	Part No.	Part Name	Description	Local
------------	----------	-----------	-------------	-------

RESISTOR

R1001	QRJ146J-5R6X	C R	5.6Ω 1/4W J	*
R1003-04	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1005	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1101	NRSA02J-820X	MG R	82Ω 1/10W J	*
R1102	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1103	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1104	QRE121J-331Y	C R	330Ω 1/2W J	*
R1105	NRSA02J-100X	MG R	10Ω 1/10W J	*

R1106	NRSA02J-390X	MG R	39Ω 1/10W J	*
R1108	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1110	QRL029J-330	OM R	33Ω 2W J	*
R1131	NRSA02J-181X	MG R	180Ω 1/10W J	*
R1132-33	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1134	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R1135	NRSA02J-331X	MG R	330Ω 1/10W J	*
R1136	NRSA02J-102X	MG R	1kΩ 1/10W J	*

R1137	NRSA02J-561X	MG R	560Ω 1/10W J	*
R1139	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1161-62	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1163	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R1164	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1201	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1202	NRSA02J-154X	MG R	150kΩ 1/10W J	*
R1203	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*

R1204	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1205	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1206	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R1207	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R1208	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1209	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R1210	NRSA02J-821X	MG R	820Ω 1/10W J	*
R1211	NRSA02J-683X	MG R	68kΩ 1/10W J	*

R1212	NRSA02J-224X	MG R	220kΩ 1/10W J	*
R1213	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1214	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1215	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1216	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1217	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R1218	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1223	QRE121J-391Y	C R	390Ω 1/2W J	*

R1225	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1231	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1232	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1233	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1236	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1237	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1238	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1239	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*

R1301	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1302	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R1303-04	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1305	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1421	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1422	QRE121J-391Y	C R	390Ω 1/2W J	*
R1423	QRT029J-R82	MF R	0.82Ω 2W J	*
R1424	QRE121J-102Y	C R	1kΩ 1/2W J	*

R1425	NRSA02J-683X	MG R	68kΩ 1/10W J	*
R1427	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1428	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1429	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1430	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1501	NRSA02J-361X	MG R	360Ω 1/10W J	*
R1502	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1504	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*

R1505	NRSA02J-822X	MG R	8.2kΩ 1/10W J	*
-------	--------------	------	---------------	---

Symbol No.	Part No.	Part Name	Description	Local
------------	----------	-----------	-------------	-------

RESISTOR

R1506	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1507	NRSA02J-563X	MG R	56kΩ 1/10W J	*
R1511	NRSA02J-391X	MG R	390Ω 1/10W J	*
R1521	NRSA02J-391X	MG R	390Ω 1/10W J	*
R1522	NRSA02J-271X	MG R	270Ω 1/10W J	*
R1523	QRE121J-103Y	C R	10kΩ 1/2W J	*
R1524	QRG029J-182	OM R	1.8kΩ 2W J	*
R1525	QRG029J-152	OM R	1.5kΩ 2W J	*

R1531	QRE121J-220Y	C R	22Ω 1/2W J	*
R1532	QRE121J-681Y	C R	680Ω 1/2W J	*
R1533	QRL039J-103	OM R	10kΩ 3W J	*
Δ R1541	QRK129J-150	C R	15Ω 1/2W J	*
R1542	QRX029J-6R8	MF R	6.8Ω 2W J	*
R1544	QRK129J-4R7	C R	4.7Ω 1/2W J	*
R1545	QRE121J-822Y	C R	8.2kΩ 1/2W J	*
R1547-48	QRE121J-184Y	C R	180kΩ 1/2W J	*

R1553	NRSA02J-333X	MG R	33kΩ 1/10W J	*
Δ R1556	QRA14CF-7501Y	MF R	7.5kΩ 1/4W F	*
Δ R1557	QRA14CF-2871Y	MF R	2.87kΩ 1/4W F	*
R1558	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R1559	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R1560	NRSA02J-273X	MG R	27kΩ 1/10W J	*
R1561	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1601	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*

R1602	NRSA02J-221X	MG R	220Ω 1/10W J	*
R1603	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1604	NRSA02J-221X	MG R	220Ω 1/10W J	*
R1605	QRT039J-2R2	MF R	2.2Ω 3W J	*
R1606-07	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1611	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R1612	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1613	NRSA02J-473X	MG R	47kΩ 1/10W J	*

R1614	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1615-16	NRSA02J-271X	MG R	270Ω 1/10W J	*
R1701	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1703	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R1704	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1705	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1706	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1710	NRSA02J-331X	MG R	330Ω 1/10W J	*

R1713	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1714	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1716	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1717	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1718	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1719	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1720	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1721	NRSA02J-471X	MG R	470Ω 1/10W J	*

R1724	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1725	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1726-28	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1729	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1730	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1731	NRSA02J-561X	MG R	560Ω 1/10W J	*
R1732	NRSA02J-224X	MG R	220kΩ 1/10W J	*
R1733-34	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*

R1735	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1736	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1739	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R1740	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1741	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1742	NRSA02J-822X	MG R	8.2kΩ 1/10W J	*
R1743	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1744	NRSA02J-103X	MG R	10kΩ 1/10W J	*

R1745	NRSA02J-473X	MG R	47kΩ 1/10W J	*
-------	--------------	------	--------------	---

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R1746	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1747	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1756-57	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1758-59	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1760	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1772	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1773	NRSA02J-121X	MG R	120Ω 1/10W J	*
R1791-95	NRSA02J-561X	MG R	560Ω 1/10W J	*
R1801-03	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
△ R1804-06	NRSA02J-101X	MG R	100Ω 1/10W J	*
△ R1901	QRFO74K-R47	UNF R	0.47 Ω 7W K	*
R1902	QRE121J-333Y	C R	33kΩ 1/2W J	*
R1903	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1904-05	QRT029J-R22	MF R	0.22Ω 2W J	*
R1907-08	QRL039J-393	OM R	39kΩ 3W J	*
R1909	QRE121J-332Y	C R	3.3kΩ 1/2W J	*
R1912-13	QRE121J-333Y	C R	33kΩ 1/2W J	*
R1914	QRE121J-2R2Y	C R	2.2Ω 1/2W J	*
R1915-16	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1917	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1918	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1920	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1924	QRG016J-221	OM R	220Ω 1W J	*
R1925	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1926	QRT029J-R82	MF R	0.82Ω 2W J	*
R1928	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1931	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R1933	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R1934	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1936	QRE121J-222Y	C R	2.2kΩ 1/2W J	*
R1940	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1941	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1942	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1943	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1944	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1945-46	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1947	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1948	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1949	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1951	QRT029J-1R2	MF R	1.2Ω 2W J	*
R1952	QRT029J-1R0	MF R	1.0Ω 2W J	*
R1954	QRE121J-272Y	C R	2.7kΩ 1/2W J	*
R1955	QRE121J-473Y	C R	47kΩ 1/2W J	*
R1956	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1961	QRJ146J-3R3X	C R	3.3Ω 1/4W J	*
R1962	QRL029J-472	OM R	4.7kΩ 2W J	*
R1963	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1966	NRSA02J-223X	MG R	22kΩ 1/10W J	*
△ R1967	QRE121J-683Y	C R	68kΩ 1/2W J	*
△ R1998	QRZ904J-275	C R	2.7MΩ 1/2W K	*
△ R1999	QRE121J-121Y	C R	120Ω 1/2W J	*

CAPACITOR

C1001	QETN1HM-475Z	E CAP.	4.7μF 50V M	*
C1003	QETN1AM-477Z	E CAP.	470μF 10V M	*
C1004	QETN1CM-227Z	E CAP.	220μF 16V M	*
C1005	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1006	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1007	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1011	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1101	QFLC1HJ-104Z	M CAP.	0.1μF 50V J	*
C1102	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1103	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1104-05	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1106	NDC21HJ-680X	C CAP.	68pF 50V J	*
C1107	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1108	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1110	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1111	NCB21HK-222X	C CAP.	2200pF 50V K	*

△ Symbol No.	Part No.	Part Name	Description	Local
CAPACITOR				
C1131	QFV71HJ-154Z	MF CAP.	0.15μF 50V J	*
C1132	QFN31HJ-152Z	M CAP.	1500pF 50V J	*
C1133	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1134	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1135	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1137	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1161	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1162	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1163	NDC21HJ-220X	C CAP.	22pF 50V J	*
C1164-65	NDC21HJ-470X	C CAP.	47pF 50V J	*
C1166	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1168-70	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1171	NCB21HK-222X	C CAP.	2200pF 50V K	*
C1201	QENC1HM-475Z	BP E CAP.	4.7μF 50V M	*
C1202-04	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1205	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C1206	QETN1HM-105Z	E CAP.	1μF 50V M	*
C1207	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1208	NDC21HJ-680X	C CAP.	68pF 50V J	*
C1221	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1224	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1225	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C1226	NDC21HJ-681X	C CAP.	680pF 50V J	*
C1228	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C1231	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1232	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1233	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1234-35	QETN1HM-105Z	E CAP.	1μF 50V M	*
C1301	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1302	NDC21HJ-100X	C CAP.	10pF 50V J	*
C1303	NCB21HK-223X	C CAP.	0.022μF 50V K	*
C1304	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1305	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1306	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1401	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C1402	QBHC1CK-225Z	TAN. CAP.	2.2μF 16V K	*
C1403	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1421	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1424	QETN1VM-107Z	E CAP.	100μF 35V M	*
C1425	QETN1VM-477Z	E CAP.	470μF 35V M	*
C1426	QFLC2AK-563Z	M CAP.	0.056μF 100V K	*
C1427	QETM1EM-228	E CAP.	2200pF 25V M	*
C1428	QFV71HJ-684Z	MF CAP.	0.68μF 50V J	*
C1429	QFV71HJ-224Z	MF CAP.	0.22μF 50V J	*
C1501	QETN1CM-227Z	E CAP.	220μF 16V M	*
C1502	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1503	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1505	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1511	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1521	QCB32HK-151Z	C CAP.	150pF 500V K	*
C1522	QCB32HK-331Z	C CAP.	330pF 500V K	*
C1523	QETN2CM-105Z	E CAP.	1μF 160V M	*
△ C1531	QFZ0117-3501	M. PP CAPACITOR	3500pF 1.4kVH±2.5%	*
△ C1532	QFZ0117-1202	M. PP CAPACITOR	0.012μF 1.4kVH±2.5%	*
△ C1533	QFM72DK-124	M CAP.	0.12μF 200V K	*
C1534	QEHR2EM-225Z	E CAP.	2.2μF 250V M	*
△ C1535	QFZ0119-404	M. PP CAPACITOR	0.4μF 200V ±3%	*
C1536	QCB32HK-561Z	C CAP.	560pF 500V K	*
C1538	QEZO420-107	E CAP.	100μF 160V M	*
C1541	QETN2EM-226Z	E CAP.	22μF 250V M	*
C1542	QETM1VM-108	E CAP.	1000μF 35V M	*
C1544	QETN1VM-107Z	E CAP.	100μF 35V M	*
C1545	QFLC2AJ-103Z	M CAP.	0.01μF 100V J	*
C1546	QFLC1HJ-473Z	M CAP.	0.047μF 50V J	*
C1548	QCB32HK-102Z	C CAP.	1000pF 500V K	*
C1551	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1578-79	QEM61HK-475Z	E CAP.	4.7μF 50V K	*
C1602	QENC1HM-474Z	BP E CAP.	0.47μF 50V M	*
C1604	QENC1HM-474Z	BP E CAP.	0.47μF 50V M	*
C1605	QETN1CM-107Z	E CAP.	100μF 16V M	*

Symbol No.	Part No.	Part Name	Description	Local
CAPACITOR				
C1606	QETN1EM-108Z	E CAP.	1000µF 25V M	*
C1607	QETN1HM-474Z	E CAP.	0.47µF 50V M	*
C1608-09	QETN1CM-477Z	E CAP.	470µF 16V M	*
C1613	QETN1EM-476Z	E CAP.	47µF 25V M	*
C1614	QETN1HM-225Z	E CAP.	2.2µF 50V M	*
C1615	QETN1HM-474Z	E CAP.	0.47µF 50V M	*
C1701-02	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1703	QETN1CM-107Z	E CAP.	100µF 16V M	*
C1704	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1705	NDC21HJ-181X	C CAP.	180pF 50V J	*
C1706	QETN1HM-474Z	E CAP.	0.47µF 50V M	*
C1708	QETN1HM-105Z	E CAP.	1µF 50V M	*
C1709	NDC21HJ-221X	C CAP.	220pF 50V J	*
C1710-11	NDC21HJ-390X	C CAP.	39pF 50V J	*
C1712	NDC21HJ-270X	C CAP.	27pF 50V J	*
C1713	NDC21HJ-150X	C CAP.	15pF 50V J	*
C1714	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1715	QETN1CM-107Z	E CAP.	100µF 16V M	*
C1716	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1717-18	NDC21HJ-330X	C CAP.	33pF 50V J	*
C1719	NDC21HJ-471X	C CAP.	470pF 50V J	*
C1720	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1721	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1724	NDC21HJ-471X	C CAP.	470pF 50V J	*
C1736	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1741	QFN31HJ-102Z	M CAP.	1000pF 50V J	*
C1743	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1744	NDC21HJ-681X	C CAP.	680pF 50V J	*
C1771	QETN1CM-476Z	E CAP.	47µF 16V M	*
C1772	NCB21HK-103X	C CAP.	0.01µF 50V K	*
C1773	QETN1CM-107Z	E CAP.	100µF 16V M	*
C1774	QETN1CM-227Z	E CAP.	220µF 16V M	*
C1801-03	QETN1HM-474Z	E CAP.	0.47µF 50V M	*
Δ C1901	QFZ9040-104	M.F. CAPACITOR	0.1µFAC275V M	*
Δ C1902	QFZ9040-473	M.M. CAPACITOR	0.047µFAC275V M	*
Δ C1903	QFZ9040-104	M.F. CAPACITOR	0.1µFAC275V M	*
Δ C1904	QCZ9052-102	C CAP.	1000pFAC125V M	*
Δ C1906	QCZ9078-102	C CAP.	1000pFAC250V M	*
Δ C1907	QCZ9078-102	C CAP.	1000pFAC250V M	*
Δ C1908	QCZ9078-102	C CAP.	1000pFAC250V M	*
Δ C1910	QEZ0169-477	E CAP.	470µF 200V M	*
C1911	QETN1VM-477Z	E CAP.	470µF 35V M	*
C1912	QFN31HJ-102Z	M CAP.	1000pF 50V J	*
C1913	QCZ0325-222	C CAP.	2200pF 2000V K	*
C1914	QCZ0325-391	C CAP.	390pF 2000V K	*
C1915	QFP326J-223	PP CAP.	0.022µF 400V J	*
C1916	QCZ0325-222	C CAP.	2200pF 2000V K	*
C1918	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1919	NCB21HK-222X	C CAP.	2200pF 50V K	*
C1920	QFLC1HJ-823Z	M CAP.	0.082µF 50V J	*
C1921-23	QCZ0132-152Z	C CAP.	1500pF 500V K	*
C1924	QEZ0420-107	E CAP.	100µF 160V M	*
C1925	QCZ0132-152Z	C CAP.	1500pF 500V K	*
C1926	QETM1CM-228	E CAP.	2200µF 16V M	*
C1927	QETN1CM-227Z	E CAP.	220µF 16V M	*
C1928	QETM1EM-108	E CAP.	1000µF 25V M	*
C1931-32	QETN1CM-476Z	E CAP.	47µF 16V M	*
C1934	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1935	QETN2AM-106Z	E CAP.	10µF 100V M	*
C1937	QETN2CM-106Z	E CAP.	10µF 160V M	*
C1938	NDC21HJ-471X	C CAP.	470pF 50V J	*
C1951	QETN1CM-107Z	E CAP.	100µF 16V M	*
C1952	QETN1HM-476Z	E CAP.	47µF 50V M	*
C1954	QETN1HM-226Z	E CAP.	22µF 50V M	*
Δ C1990	QCZ9074-103	C CAP.	0.01µFAC125V M	*
Δ C1991	QCZ9074-103	C CAP.	0.01µFAC125V M	*

Symbol No.	Part No.	Part Name	Description	Local
TRANSFORMER				
T1131	QQR0907-001	IFT		*
T1161	CELT003-109J3	S.I.F. TRANSF.		*
T1521	CE42034-002	H.DRIVE TRANSF.		*
Δ T1522	QQH0032-001	F B T		*
Δ T1901	CETS107-001J8	SW TRANSF.		*

COIL

L1001	QQL03BJ-101Z	COIL	100µH J	*
L1102	QQLZ014-R22	PEAKING COIL	0.22µH	*
L1103	QQLZ014-R68	PEAKING COIL	0.68µH	*
L1104	QQL03BJ-680Z	COIL	68µH J	*
L1131	QQL03BJ-330Z	COIL	33µH J	*
L1161	QQL03BJ-680Z	COIL	68µH J	*
L1162	QQL03BJ-220Z	COIL	22µH J	*
L1201	QQL03BJ-270Z	COIL	27µH J	*
Δ L1531	CELL009-003	LINEARITY COIL		*
L1532	QQLZ016-821	CHOKE COIL		*
Δ L1591	QQLZ018-340	HEATER CHOKE		*
L1701	QQL03BJ-SR6Z	COIL	5.6µH J	*
L1702	QQL244J-100Z	COIL	10µH J	*
L1707	QQL03BJ-SR6Z	COIL	5.6µH J	*
L1771	QQL03BJ-SR6Z	COIL	5.6µH J	*
L1921	QQL42AK-820Z	COIL	82µH K	*
L1922	QQL42AK-220Z	COIL	22µH K	*

DIODE

D1001	MTZJ33A-T2	ZENER DIODE		*
D1221	MTZJ5.1B-T2	ZENER DIODE		*
D1231-34	1SS133-T2	SI DIODE		*
D1421	1N4003-T2	SI DIODE		*
D1422	MTZJ75-T2	ZENER DIODE		*
D1501	1SS133-T2	SI DIODE		*
D1511	MTZJ3.3A-T2	ZENER DIODE		*
Δ D1531	RH3G-F1	SI DIODE		*
Δ D1532	RU3AM-LFC4	SI DIODE		*
D1533	RGP10J-5025-T3	SI DIODE		*
D1541	RH1S-T3	SI DIODE		*
D1542	RGP10J-5025-T3	SI DIODE		*
D1544	1SS81-T2	SI DIODE		*
D1546	1SR124-400A-T2	SI DIODE		*
D1549	MTZJ9.1B-T2	ZENER DIODE		*
Δ D1551	MA4068N/Z1/-T2	ZENER DIODE		*
D1560-61	1SS133-T2	SI DIODE		*
D1601-02	1SS133-T2	SI DIODE		*
D1609	1SS133-T2	SI DIODE		*
D1702-04	1SS133-T2	SI DIODE		*
D1741-42	1SS133-T2	SI DIODE		*
D1771-72	1SS133-T2	SI DIODE		*
D1801	MTZJ5.1B-T2	ZENER DIODE		*
D1804	1SS133-T2	SI DIODE		*
Δ D1901	D3SBA60-S1	BRIDGE DIODE		*
Δ D1902	RGP10J-5025-T3	SI DIODE		*
D1903-04	1SS133-T2	SI DIODE		*
D1905	EG1A-T3	SI DIODE		*
D1909	MTZJ15A-T2	ZENER DIODE		*
D1910	RGP10J-5025-T3	SI DIODE		*
D1911	1SS133-T2	SI DIODE		*
D1912	MTZJ15A-T2	ZENER DIODE		*
D1913-14	RGP10J-5025-T3	SI DIODE		*
D1916	RGP10J-5025-T3	SI DIODE		*
D1918	MTZJ13B-T2	ZENER DIODE		*
D1921	RU3AM-LFC4	SI DIODE		*
D1922	RU3YX-LFC4	SI DIODE		*
D1923	RGP10J-5025-T3	SI DIODE		*
D1925	RGP10J-5025-T3	SI DIODE		*
D1926-28	1SS133-T2	SI DIODE		*
D1931	1SS133-T2	SI DIODE		*
D1933	1SS133-T2	SI DIODE		*

△ Symbol No.	Part No.	Part Name	Description	Local
TRANSISTOR				
D1942	MTZJ6.8C-T2	ZENER DIODE		*
D1951	MTZJ7.5S-T2	ZENER DIODE		*
Q1101	2SC5083/L-P/-T	SI. TRANSISTOR		*
Q1131-32	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1161	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1201-03	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1204-05	2SA1037AK/QR/-X	SI. TRANSISTOR		*
Q1231-32	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1521	2SC4212/Z1/	SI. TRANSISTOR		*
△ Q1531	2SD2499-LB	SI. TRANSISTOR	H. OUT	*
Q1541	2SA1037AK/QR/-X	SI. TRANSISTOR		*
△ Q1542	2SC2785/JH/-T	SI. TRANSISTOR		*
Q1601	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1602	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1603	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1604	2SA1037AK/QR/-X	SI. TRANSISTOR		*
Q1701	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1702	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1741	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1742	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1743	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1911	2SA1037AK/QR/-X	SI. TRANSISTOR		*
Q1912	2SD2088-T	SI. TRANSISTOR		*
Q1921	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1922	2SD1383K/AB/-X	SI. TRANSISTOR		*
Q1923	2SA1020/Y/-T	SI. TRANSISTOR		*
Q1924	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1925	2SA949/Y/Z1-T	SI. TRANSISTOR		*
Q1926	2SC2240/GL/-T	SI. TRANSISTOR		*
Q1927-28	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1942-43	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q1944	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1951	2SA949/Y/Z1-T	SI. TRANSISTOR		*
I C				
IC1001	K1A78L05BP-T	I. C. (MONO-ANA)		*
IC1101	UPC2409AHF	I. C. (MONO-ANA)		*
IC1201	TA1242N	I. C. (MONO-ANA)		*
IC1202	TC4066BP	I. C. (DIGI-MOS)		*
△ IC1421	LA7832	I. C. (MONO-ANA)		*
△ IC1601	LA4485	I. C. (MONO-ANA)		*
IC1701	MN187487JB	I C		*
IC1702	AT24C02-27950U	I. C.	(SERVICE)	*
IC1703	MN1381/Q/-T	I. C. (MONO-ANA)		*
IC1771	AN77L05-T	I. C. (MONO-ANA)		*
△ IC1901	STR-F6626	I C		*
△ IC1941	SE135N	I. C. (HYBRID)		*
OTHERS				
CF1001	FTP47.25MF	CERAMIC FILTER		*
CF1131	QAX0339-001	CERAMIC FILTER		*
CF1161	SFSH4.5MCB	CERAMIC FILTER		*
CF1501	CSB503F30-T2	CER. RESONATOR		*
CF1701	FCR12.0M2S	CER. RESONATOR		*
CN1001	CHB303W-35R-J	RECEPTACLE		*
△ CN10PW	QMPD070-200-JC	POWER CORD		*
CN10EG	CH42145-802T	VH POST HEADER		*
△ F1901	QMF0007-5R0J1	FUSE	5.0A	*
K1421	QQR0582-001Z	BEADS CORE		*
K1901	CE41433-001Z	BEADS CORE		*
K1903	CE41433-001Z	BEADS CORE		*
K1921	CE41433-001Z	BEADS CORE		*
K1922	QQR0621-001Z	BEADS CORE		*
△ LF1901	CELF008-001J5	LINE FILTER		*
△ LF1902	CE42335-001J1	LINE FILTER		*
△ PC1901	TLP621(B)	I. C. (PH. COUPLER)		*
△ PC1902	TLP621(B)	I. C. (PH. COUPLER)		*
△ RY1901	CESK028-001	RELAY		*

△ Symbol No.	Part No.	Part Name	Description	Local
OTHERS				
△ RY1921	CESK028-001	RELAY		*
S1421	QSL4A13-C02	LEVER SWITCH	(V. CENTER SW)	*
SF1101	CE42604-201	SAW FILTER		*
△ TH1901	CEKP007-002	P. THERMISTOR		*
△ TU1001	QAU0070-001	TUNER		*
△ VA1901	ERZV10V361CS	VARISTOR		*
W1156-57	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1159	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1161	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1164	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1166-67	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1170-73	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1175-76	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1178	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1180	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1187	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1191	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1193-94	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1196	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1201-03	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1205	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1263	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1267-68	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1276-78	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1293-95	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1297	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
X1301	QAX0310-001Z	CRYSTAL		*
Y1016-17	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
Y1705	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
Y1710	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
Y1712	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*

CRT SOKET P.W. BOARD ASS'Y (SGV-3001A-M2)

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R3351-53	NRSA02J-221X	MG R	220Ω 1/10W J	*
R3354-56	NRSA02J-181X	MG R	180Ω 1/10W J	*
R3357-59	NRSA02J-101X	MG R	100Ω 1/10W J	*
R3360-62	QRZ0111-152	C R	1.5kΩ 1/2W K	*
R3363-65	QRG029J-103	OM R	10kΩ 2W J	*
R3366-68	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R3381	QRE121J-394Y	C R	390kΩ 1/2W J	*
CAPACITOR				
C3354-55	NCS21HJ-331X	C CAP.	330pF 50V J	*
C3356	NCS21HJ-391X	C CAP.	390pF 50V J	*
C3357	QETN1CM-107Z	E CAP.	100μF 16V M	*
△ C3382	QCZ0121-102	C CAP.	1000pF 3000V Z	*
COIL				
L3381	QQL39BK-101Z	COIL	100μH K	*
TRANSISTOR				
Q3351-53	2SC4544-LB	SI. TRANSISTOR		*
OTHERS				
△ SK3351	CE42535-001J1	C. R. T. SOCKET		*

FRONT CONTROL P.W. BOARD ASS'Y
(SGV-4001A-M2)

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R4701	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R4702	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R4703	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R4704	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R4705	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R4706	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R4707	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R4708	NRSA02J-681X	MG R	680Ω 1/10W J	*
R4709	NRSA02J-561X	MG R	560Ω 1/10W J	*
CAPACITOR				
C4841	QETN1CM-476Z	E CAP.	47μF 16V M	*
DIODE				
D4701	GL2PR6	L.E.D. (RED)		*
TRANSISTOR				
Q4701-02	DTA124EKA-X	DIGI. TRANSISTOR		*
IC				
IC4841	GP1U281Q	IFR DETECT UNIT		*
OTHERS				
S4702	CM46978-A01-H	L.E.D. HOLDER		*
S4703	QSP1A11-C19Z	PUSH SWITCH	(MENU)	*
S4704	QSP1A11-C19Z	PUSH SWITCH	(CH -)	*
S4705	QSP1A11-C19Z	PUSH SWITCH	(CH +)	*
S4706	QSP1A11-C19Z	PUSH SWITCH	(VOL -)	*
S4707	QSP1A11-C19Z	PUSH SWITCH	(VOL +)	*
S4708	QSP1A11-C19Z	PUSH SWITCH	(POWER)	*
W4008-09	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*

AV SELECTOR P.W. BOARD ASS'Y
(SGV-8001A-M2)

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R8002	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8003-04	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R8005	QRJ146J-5R6X	C R	5.6Ω 1/4W J	*
R8101	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8102	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8103	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R8104	NRSA02J-180X	MG R	18Ω 1/10W J	*
R8105	NRSA02J-270X	MG R	27Ω 1/10W J	*
R8106	QRE121J-101Y	C R	100Ω 1/2W J	*
R8109	NRVA02D-221X	MF R	220Ω 1/10W D	*
R8110-11	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R8112	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8113	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8115	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8117	NRSA02J-181X	MG R	180Ω 1/10W J	*
R8119	NRSA02J-821X	MG R	820Ω 1/10W J	*

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R8120	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8121	NRSA02J-330X	MG R	33Ω 1/10W J	*
R8124	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R8125	NRSA02J-334X	MG R	330kΩ 1/10W J	*
R8126	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8202	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8203	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8204	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8211	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8212	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8213	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8215-16	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8217	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8271	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R8275	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8276	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R8301-02	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8303	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R8304	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R8305	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R8306	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8308	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8310-11	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R8371	NRSA02J-681X	MG R	680Ω 1/10W J	*
R8372	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8375	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R8376	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8377	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8378	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R8601	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8602-03	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R8604	NRSA02J-683X	MG R	68kΩ 1/10W J	*
R8605	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R8606	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R8607	NRVA02D-153X	MF R	15kΩ 1/10W D	*
R8609	NRVA02D-152X	MF R	1.5kΩ 1/10W D	*
R8611	NRSA02J-512X	MG R	5.1kΩ 1/10W J	*
R8613-16	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8661	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R8662	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R8663-64	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R8665	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R8666	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R8667-68	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8671	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8672	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8683-86	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8691-94	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8695-96	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R8801-03	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8804-05	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R8808	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8809-10	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R8811-14	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8818	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8819	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8820	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R8821-22	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8823-24	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R8825	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R8826	NRSA02J-273X	MG R	27kΩ 1/10W J	*
R8827	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R8828	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8829	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8831	NRSA02J-821X	MG R	820Ω 1/10W J	*
R8832-33	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R8835	NRSA02J-273X	MG R	27kΩ 1/10W J	*
R8836	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8837	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*

△ Symbol No. Part No. Part Name Description Local

RESISTOR

R8841	NRSA02J-821X	MG R	820Ω 1/10W	J	*
R8842-43	NRSA02J-182X	MG R	1.8kΩ 1/10W	J	*
R8847	NRSA02J-562X	MG R	5.6kΩ 1/10W	J	*
R8848	NRSA02J-101X	MG R	100Ω 1/10W	J	*
R8851	NRSA02J-562X	MG R	5.6kΩ 1/10W	J	*
R8852	NRSA02J-223X	MG R	22kΩ 1/10W	J	*

CAPACITOR

C8001	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C8003	QETN1CM-107Z	E CAP.	100μF	16V	M	*
C8004	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8005	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8006	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8007-08	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8101-03	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8104	NCB21HK-222X	C CAP.	2200pF	50V	K	*
C8105	QETN1CM-107Z	E CAP.	100μF	16V	M	*
C8106	NCB21HK-222X	C CAP.	2200pF	50V	K	*
C8107	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8108	NDC21HJ-101X	C CAP.	100pF	50V	J	*
C8109-10	QFV71HJ-224Z	MF CAP.	0.22μF	50V	J	*
C8112	NCB21HK-222X	C CAP.	2200pF	50V	K	*
C8113	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8114	QETN1HM-474Z	E CAP.	0.47μF	50V	M	*
C8115	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8116	QETN1CM-107Z	E CAP.	100μF	16V	M	*
C8117	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8118	QFV71HJ-474Z	MF CAP.	0.47μF	50V	J	*
C8201	QETN1CM-107Z	E CAP.	100μF	16V	M	*
C8211	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8212	NDC21HJ-330X	C CAP.	33pF	50V	J	*
C8216	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8303	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8306	NDC21HJ-680X	C CAP.	68pF	50V	J	*
C8307	NDC21HJ-271X	C CAP.	270pF	50V	J	*
C8308	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8371	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8375	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8601	QETN1CM-107Z	E CAP.	100μF	16V	M	*
C8602	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8603	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8604	NCB21HK-104X	CHIP CAP.	0.1μF	50V	K	*
C8605	QENC1HM-475Z	BP E CAP.	4.7μF	50V	M	*
C8606	QENC1HM-105Z	BP E CAP.	1μF	50V	M	*
C8607	QETN1HM-225Z	E CAP.	2.2μF	50V	M	*
C8608	NCB21HK-473X	C CAP.	0.047μF	50V	K	*
C8609	QETN1HM-474Z	E CAP.	0.47μF	50V	M	*
C8610-11	NCB21HK-104X	CHIP CAP.	0.1μF	50V	K	*
C8612	QETN1HM-105Z	E CAP.	1μF	50V	M	*
C8613	QBTC1CK-335Z	TAN. CAP.	3.3μF	16V	K	*
C8614	QBTC1CK-106Z	TAN. CAP.	10μF	16V	K	*
C8615-16	QETN1HM-105Z	E CAP.	1μF	50V	M	*
C8617	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C8618	QETN1HM-105Z	E CAP.	1μF	50V	M	*
C8619	NCB21HK-273X	C CAP.	0.027μF	50V	K	*
C8620	QETN1HM-225Z	E CAP.	2.2μF	50V	M	*
C8621	NCB21HK-222X	C CAP.	2200pF	50V	K	*
C8622	NCB21HK-104X	CHIP CAP.	0.1μF	50V	K	*
C8623	QETN1HM-225Z	E CAP.	2.2μF	50V	M	*
C8624	NCB21HK-222X	C CAP.	2200pF	50V	K	*
C8625	NCB21HK-104X	CHIP CAP.	0.1μF	50V	K	*
C8628	QETN1HM-105Z	E CAP.	1μF	50V	M	*
C8661-62	QENC1HM-105Z	BP E CAP.	1μF	50V	M	*
C8664	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8691-92	QETN1HM-474Z	E CAP.	0.47μF	50V	M	*
C8811-14	QETN1HM-105Z	E CAP.	1μF	50V	M	*
C8821	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8822	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8823-27	QETN1HM-106Z	E CAP.	10μF	50V	M	*

△ Symbol No. Part No. Part Name Description Local

CAPACITOR

C8828	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8829	QENC1EM-106Z	BP E CAP.	10μF	25V	M	*
C8831	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8832	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8833	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8835-36	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8841	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8842	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C8843	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C8845	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C8846	NCB21HK-103X	C CAP.	0.01μF	50V	K	*

COIL

L8003	QQL03BJ-150Z	COIL	15μH	J	*
L8101	QQL2014-R22	PEAKING COIL	0.22μH	J	*
L8103	CE42452-003	COIL		J	*
L8104	QQL03BJ-180Z	PEAKING COIL	18μH	J	*
L8106	QQL03BJ-5R6Z	COIL	5.6μH	J	*
L8211	QQL03BJ-220Z	COIL	22μH	J	*
L8302	QQL03BJ-150Z	COIL	15μH	J	*
L8801-02	QQL03BJ-5R6Z	COIL	5.6μH	J	*

DIODE

D8693-94	MTZJ9.1C-T2	ZENER DIODE			*
D8703	MTZJ5.6B-T2	ZENER DIODE			*
D8811-22	MTZJ9.1C-T2	ZENER DIODE			*

TRANSISTOR

Q8101	2SC5083/L-P/-T	SI. TRANSISTOR			*
Q8102	2SA1037AK/QR/-X	SI. TRANSISTOR			*
Q8201	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8211	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8212	2SA1037AK/QR/-X	SI. TRANSISTOR			*
Q8271	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8302	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8304-05	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8371	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8671-72	DTC124EKA-X	DIGI. TRANSISTOR			*
Q8683-86	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8801-02	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8803	2SA1037AK/QR/-X	SI. TRANSISTOR			*
Q8804-07	2SC2412K/QR/-X	SI. TRANSISTOR			*
Q8851-52	DTC124EKA-X	DIGI. TRANSISTOR			*

IC

IC8001	KIA78L05BP-T	I.C. (MONO-ANA)			*
IC8101	LA7583	I.C. (MONO-ANA)			*
IC8601	UPC1851BCU	I.C.			*
IC8661	BA15218N	I.C. (MONO-ANA)			*
IC8671	TC4066BP	I.C. (DIGI-MOS)			*
IC8801-02	BA7644AN	I.C. (MONO-ANA)			*
IC8803	TC4066BP	I.C. (DIGI-MOS)			*

OTHERS

CF8102	FCR5.71M2SF3	CER. RESONATOR			*
CF8103	QAX0339-001	CERAMIC FILTER			*
CM8201	CE42599-001	COMB FILTER			*
CN8001	CHB303W-35P-J	PLUG			*
DL8201	CE42464-001	BPF&DL MODULE			*
J8801	QNZ0117-001	PIN JACK			*
J8802	QNN0182-001	PIN JACK			*
J8803	QNN0181-001	PIN JACK			*
J8804	QNS0001-001	JACK			*
SF8101	QAX0483-001	SAW FILTER			*
TU8001	QAU0070-001	TUNER			*
W8071-72	NRSA02J-OROX	MG R	0.0Ω 1/10W	J	*
W8096	NRSA02J-OROX	MG R	0.0Ω 1/10W	J	*

△ Symbol No.	Part No.	Part Name	Description	Local
OTHERS				
W8102-03	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
W8108	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
W8169	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
W8189-90	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
W8193	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*

PIP P.W. BOARD ASS'Y (SGV0P001A-M2)

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R0101	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R0102	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R0103	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R0104	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R0105	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0106	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R0107	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0108	NRSA02J-334X	MG R	330kΩ 1/10W J	*
R0109	NRSA02J-561X	MG R	560Ω 1/10W J	*
R0110	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
R0120	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R0141	NRSA02J-752X	MG R	7.5kΩ 1/10W J	*
R0142	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R0147-48	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0150	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0151-55	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0156	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R0157	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
R0158	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0159	NRSA02J-681X	MG R	680Ω 1/10W J	*
R0160	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R0161	QRC016J-390	OM R	39Ω 1W J	*
R0201	NRSA02J-122X	MG R	1.2kΩ 1/10W J	*
R0202	NRSA02J-101X	MG R	100Ω 1/10W J	*
R0203	NRSA02J-105X	MG R	1MΩ 1/10W J	*
R0204	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R0205	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R0206	NRSA02J-471X	MG R	470Ω 1/10W J	*
R0207	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R0208	NRSA02J-122X	MG R	1.2kΩ 1/10W J	*
R0209	NRSA02J-101X	MG R	100Ω 1/10W J	*
R0210	NRSA02J-105X	MG R	1MΩ 1/10W J	*
R0211	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0212	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R0213-14	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R0215	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R0216	NRSA02J-101X	MG R	100Ω 1/10W J	*
R0218	NRSA02J-0ROX	MG R	0.0Ω 1/10W J	*
R0219-20	NRSA02J-181X	MG R	180Ω 1/10W J	*
R0229-38	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R0241-43	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R0301	NRSA02J-122X	MG R	1.2kΩ 1/10W J	*
R0302	NRSA02J-561X	MG R	560Ω 1/10W J	*
R0303	NRSA02J-391X	MG R	390Ω 1/10W J	*
R0304	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R0305	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R0306	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R0307	NRSA02J-683X	MG R	68kΩ 1/10W J	*
R0308	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0309	NRSA02J-681X	MG R	680Ω 1/10W J	*
R0311	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R0312	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R0313	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R0314	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0315	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R0316	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0317	NRSA02J-101X	MG R	100Ω 1/10W J	*
R0318-20	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R0321	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0322	NRSA02J-122X	MG R	1.2kΩ 1/10W J	*
R0323	NRSA02J-391X	MG R	390Ω 1/10W J	*
R0324	NRSA02J-331X	MG R	330Ω 1/10W J	*
R0325	NRSA02J-122X	MG R	1.2kΩ 1/10W J	*
R0326	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0331	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R0333	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R0335-36	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R0401	QRJ146J-150X	C R	15Ω 1/4W J	*
R0402	NRSA02J-273X	MG R	27kΩ 1/10W J	*
R0403	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R0404	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R0405	NRSA02J-680X	MG R	680Ω 1/10W J	*
R0406	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R0407	NRSA02J-221X	MG R	220Ω 1/10W J	*
R0408	NRSA02J-273X	MG R	27kΩ 1/10W J	*
R0409	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R0410	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0411-12	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R0413	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R0414	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R0415	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0416	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R0417	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R0418	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0419	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R0420	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R0421	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R0422	NRSA02J-151X	MG R	150Ω 1/10W J	*
CAPACITOR				
C0101	QENC1EM-106Z	BP E CAP.	10μF 25V M	*
C0102	NDC21HJ-150X	C CAP.	150pF 50V J	*
C0103	NDC21HJ-101X	C CAP.	100pF 50V J	*
C0104	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0108	QETN1HM-106Z	E CAP.	10μF 50V M	*
C0109	QETN1HM-105Z	E CAP.	1μF 50V M	*
C0110	NDC21HJ-561X	C CAP.	560pF 50V J	*
C0121	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C0122	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0123	NCB21HK-152X	C CAP.	1500pF 50V K	*
C0124	QETN1CM-476Z	E CAP.	47μF 16V M	*
C0125	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0126	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C0127	NDC21HJ-220X	C CAP.	22pF 50V J	*
C0142	NDC21HJ-150X	C CAP.	150pF 50V J	*
C0143	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0144	QETN1CM-476Z	E CAP.	47μF 16V M	*
C0145	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0146	QETN1HM-105Z	E CAP.	1μF 50V M	*
C0149	NDC21HJ-101X	C CAP.	100pF 50V J	*
C0150	NDC21HJ-470X	C CAP.	47pF 50V J	*
C0162	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0163	QETN1CM-476Z	E CAP.	47μF 16V M	*
C0164	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0165	QETN1CM-476Z	E CAP.	47μF 16V M	*
C0166	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0167	QETN1CM-476Z	E CAP.	47μF 16V M	*
C0171-89	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C0201	QETN1CM-476Z	E CAP.	47μF 16V M	*

△ Symbol No. Part No. Part Name Description Local

CAPACITOR

C0202	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0203	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0204-05	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0206	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0207-08	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C0209-11	QENC1HM-475Z	BP E CAP.	4.7μF	50V	M	*
C0212	QETN1HM-225Z	E CAP.	2.2μF	50V	M	*
C0213	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0214	QETN1HM-225Z	E CAP.	2.2μF	50V	M	*
C0215	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0216	NDC21HJ-102X	C CAP.	1000pF	50V	J	*
C0217	QETN1HM-106Z	E CAP.	10μF	50V	M	*
C0218	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0222-25	NDC21HJ-470X	C CAP.	47pF	50V	J	*
C0226	QETN1HM-105Z	E CAP.	1μF	50V	M	*
C0227	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0236-40	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C0241-51	NDC21HJ-101X	C CAP.	100pF	50V	J	*
C0252-60	NDC21HJ-471X	C CAP.	470pF	50V	J	*
C0261-62	NDC21HJ-681X	C CAP.	680pF	50V	J	*
C0263	NDC21HJ-101X	C CAP.	100pF	50V	J	*
C0270-78	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0302	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0304	QENC1HM-475Z	BP E CAP.	4.7μF	50V	M	*
C0305	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0308	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C0310	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0312	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C0331	NCB21HK-103X	C CAP.	0.01μF	50V	K	*
C0332-33	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C0334	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0401	QETN1CM-107Z	E CAP.	100μF	16V	M	*
C0402	NDC21HJ-820X	C CAP.	82pF	50V	J	*
C0404-06	QETN1HM-475Z	E CAP.	4.7μF	50V	M	*
C0407	QETN1CM-476Z	E CAP.	47μF	16V	M	*
C0408-10	QETN1HM-106Z	E CAP.	10μF	50V	M	*

COIL

L0101	QQL03BJ-100Z	COIL	10μH	J	*
L0103	QQL03BJ-150Z	COIL	15μH	J	*
L0106	QQL03BJ-820Z	COIL	82μH	J	*
L0107	QQL03BJ-150Z	COIL	15μH	J	*

DIODE

D0201	1SS133-T2	SI DIODE			*
D0402-03	1SS133-T2	SI DIODE			*

TRANSISTOR

Q0101-05	2SC2412K/QR/-X	SI TRANSISTOR			*
Q0106	2SA1037AK/QR/-X	SI TRANSISTOR			*
Q0201	2SA1037AK/QR/-X	SI TRANSISTOR			*
Q0301-09	2SC2412K/QR/-X	SI TRANSISTOR			*
Q0401	2SC2412K/QR/-X	SI TRANSISTOR			*
Q0402	2SA1037AK/QR/-X	SI TRANSISTOR			*
Q0403-09	2SC2412K/QR/-X	SI TRANSISTOR			*

IC

IC0101	LA7403	I.C. (MONO-ANA)			*
IC0102	K1A7809PI	I.C. (MONO-ANA)			*
IC0103	K1A7805PI	I.C. (MONO-ANA)			*
IC0201	LC74411N	I.C. (DIGI-MOS)			*
IC0202	MN1381/Q/-T	I.C. (MONO-ANA)			*
IC0301	BA7655AF-X	I.C. (MONO-ANA)			*
IC0401	AN5860	I.C. (MONO-ANA)			*

△ Symbol No. Part No. Part Name Description Local

OTHERS


	CM36337-A01-H	SHIELD COVER			*
W0001	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0006-07	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0011	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0014-20	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0022-30	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0033-41	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0044-53	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0061-68	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0070-73	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0075-77	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0079-81	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0083-88	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0099	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0100-05	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0107-14	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0115	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0132-33	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0135-36	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
W0141	NRSA02J-OROX	MG R	0.0Ω	1/10W	J *
X0101	CSB503F30-T2	CER. RESONATOR			*
X0102	CE41651-001Z	CRYSTAL			*

AV-27950

REMOTE CONTROL UNIT PARTS LIST (RM-C755-1C)

△ Ref.No.	Part No.	Part Name	Description	Local
	2AA015250	BATTERY COVER		*

PACKING

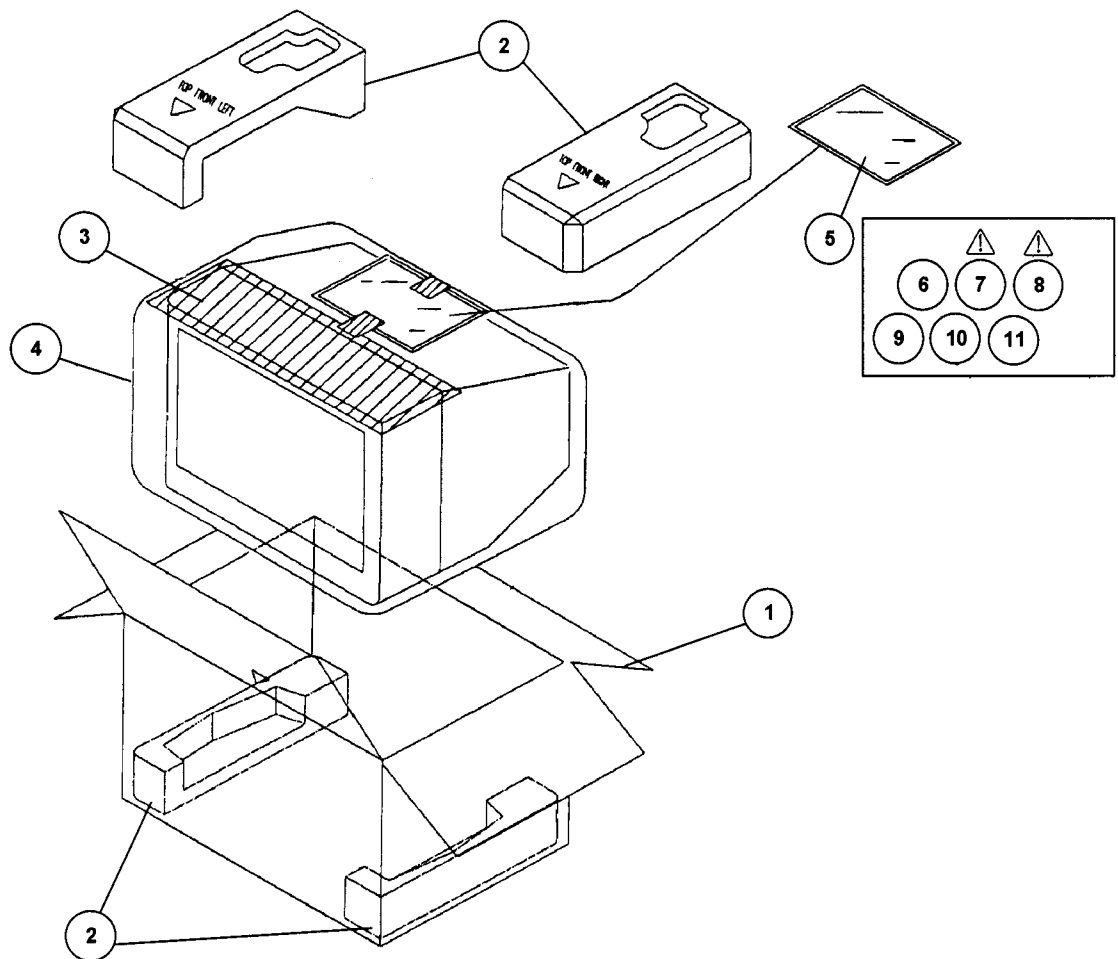

AV-27950


PACKING PARTS LIST

△ Ref.No.	Part No.	Part Name	Description	Local
[America Model]				
1	CP11499-016-A	PACKING CASE		*
2	LC10083-004B-A	CUSHION ASSY	4pcs in 1set	*
3	CP30055-001-A	TOP COVER		*
4	CP30056-008-A	POLY BAG		*
5	QPGA025-03505A	POLY BAG		*
6	RM-C755-1C	REMOCON UNIT		*
△ 7	LCT0139-001A-A	INST BOOK	(ENGLISH)	*
9	BT-51006-1Q	REGISTER CARD		*
[Canada Model]				
1	CP11499-016-A	PACKING CASE		*
2	LC10083-004B-A	CUSHION ASSY	4pcs in 1set	*
3	CP30055-001-A	TOP COVER		*
4	CP30056-008-A	POLY BAG		*
5	QPGA025-03505A	POLY BAG		*
6	RM-C755-1C	REMOCON UNIT		*
△ 7	LCT0139-001A-A	INST BOOK	(ENGLISH)	*
△ 8	LCT0140-001A-A	INST BOOK	(FRENCH)	*
10	BT-52002-1Q	WARRANTY CARD		*
11	BT-20071B-Q	SVC CENTER LIST		*

AV-27980 (US&CA)**EXPLODED VIEW PARTS LIST**

△ Ref.No.	Part No.	Part Name	Description	Local
△ L01	CE41329-00DJB	DEG COIL		*
△ V01	A68ADT25X01	ITC TUBE(C)	(Inc.DY)	*
△ T1522	QQH0032-001	F B T	(Within MAIN PWB)	*
△ 1	CM12919-006-MA	FRONT CABINET		*
2	CHGB0015-0B	BRAIDED WIRE		*
3	CHGB0016-0C	BRAIDED SUB WIRE		*
△ 4	CEBSS12D-04KJ2	SPEAKER	(×2)SP01,SP02	*
5	CM36568-B01-VA	PUSH KNOB		*
6	CM12689-B01-VA	CHASSIS BASE		*
7	CEGA008-001	ANT.SPLITTER		*
△ 8	CM48140-A03-A	CORD CLAMP		*
△ 9	QMPD070-200-JC	POWER CORD	(SERVICE)	*
△ 10	LC20087-001B-A	TERMINAL BOARD		*
11	SBSB3010Z	TAPPING SCREW	(×3)	*
△ 12	CM12920-D01-MA	REAR COVER		*
13	GBSB4016Z	TAPPING SCREW	(×9)	*
△ 14	CM22999-001-A	RATING LABEL	(CA)	*
△ 14	CM23034-001-A	RATING LABEL	(US)	*
15	CM35983-001-H	REMOCON WINDOW		*
16	CM48006-A03-H	JVC MARK		*

EXPLODED VIEW

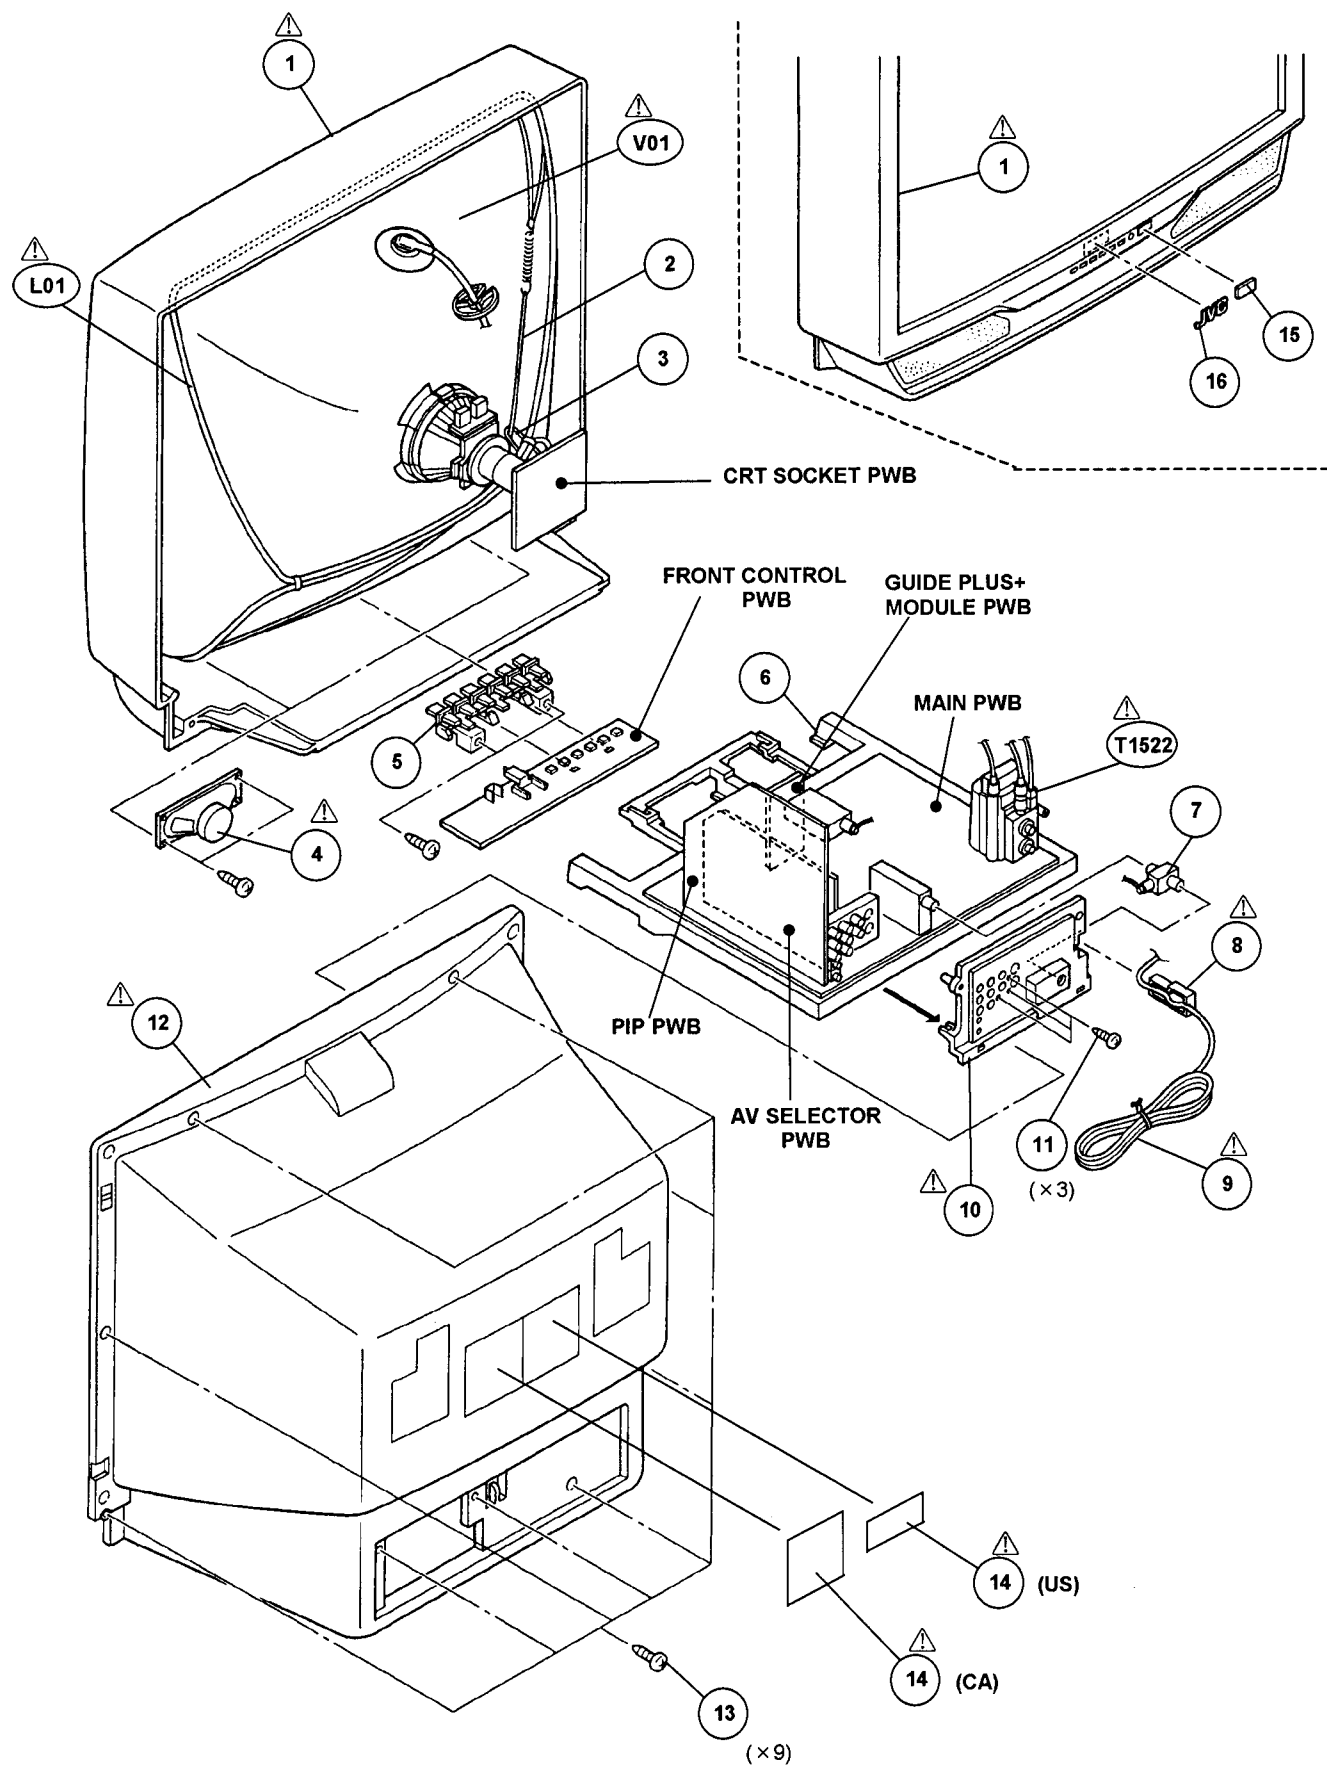

AV-2/980

PRINTED WIRING BOARD PARTS LIST

MAIN P.W. BOARD ASS'Y (SGV-1005A-M2)

Δ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R1001	QRJ146J-5R6X	C R	5.6Ω 1/4W J	*
R1003-04	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1005	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1101	NRSA02J-820X	MG R	82Ω 1/10W J	*
R1102	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1103	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1104	QRE121J-331Y	C R	330Ω 1/2W J	*
R1105	NRSA02J-100X	MG R	10Ω 1/10W J	*
R1106	NRSA02J-390X	MG R	39Ω 1/10W J	*
R1108	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1110	QRL029J-330	OM R	33Ω 2W J	*
R1131	NRSA02J-181X	MG R	180Ω 1/10W J	*
R1132-33	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1134	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R1135	NRSA02J-331X	MG R	330Ω 1/10W J	*
R1136	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1137	NRSA02J-561X	MG R	560Ω 1/10W J	*
R1139	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1161-62	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1163	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R1164	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1201	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1202	NRSA02J-154X	MG R	150kΩ 1/10W J	*
R1203	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1204	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1205	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1206	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R1207	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R1208	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1209	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R1210	NRSA02J-821X	MG R	820Ω 1/10W J	*
R1211	NRSA02J-683X	MG R	68kΩ 1/10W J	*
R1212	NRSA02J-224X	MG R	220kΩ 1/10W J	*
R1213	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1214	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1215	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1216	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1217	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R1218	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1221	NRSA02J-221X	MG R	220Ω 1/10W J	*
R1222	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R1223	QRE121J-391Y	C R	390Ω 1/2W J	*
R1225	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1231	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1232	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1233	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R1236	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1237	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1238	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1239	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R1301	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1302	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R1303-04	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1305	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1421	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1422	QRE121J-391Y	C R	390Ω 1/2W J	*
R1423	QRT029J-R82	MF R	0.82Ω 2W J	*
R1424	QRE121J-102Y	C R	1kΩ 1/2W J	*
R1425	NRSA02J-683X	MG R	68kΩ 1/10W J	*
R1427	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1428	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1429	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1430	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1501	NRSA02J-361X	MG R	360Ω 1/10W J	*
R1502	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*

Δ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R1504	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1505	NRSA02J-822X	MG R	8.2kΩ 1/10W J	*
R1506	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1507	NRSA02J-563X	MG R	56kΩ 1/10W J	*
R1511	NRSA02J-391X	MG R	390Ω 1/10W J	*
R1521	NRSA02J-391X	MG R	390Ω 1/10W J	*
R1522	NRSA02J-271X	MG R	270Ω 1/10W J	*
R1523	QRE121J-103Y	C R	10kΩ 1/2W J	*
R1524	QRG029J-182	OM R	1.8kΩ 2W J	*
R1525	QRG029J-152	OM R	1.5kΩ 2W J	*
R1531	QRE121J-220Y	C R	22Ω 1/2W J	*
R1532	QRE121J-681Y	C R	680Ω 1/2W J	*
R1533	QRL039J-103	OM R	10kΩ 3W J	*
Δ R1541	QRK129J-150	C R	15Ω 1/2W J	*
R1542	QRX029J-6R8	MF R		*
R1544	QRK129J-4R7	C R	4.7Ω 1/2W J	*
R1545	QRE121J-822Y	C R	8.2kΩ 1/2W J	*
R1547	QRE121J-184Y	C R	180kΩ 1/2W J	*
R1548	QRE121J-184Y	C R	180kΩ 1/2W J	*
R1553	NRSA02J-333X	MG R	33kΩ 1/10W J	*
Δ R1556	QRA14CF-7501Y	MF R	7.5kΩ 1/4W F	*
Δ R1557	QRA14CF-2871Y	MF R	2.87kΩ 1/4W F	*
R1558	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R1559	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R1560	NRSA02J-273X	MG R	27kΩ 1/10W J	*
R1561	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1601	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1602	NRSA02J-221X	MG R	220Ω 1/10W J	*
R1603	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R1604	NRSA02J-221X	MG R	220Ω 1/10W J	*
R1605	QRT039J-2R2	MF R	2.2Ω 3W J	*
R1606-07	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1611	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R1612	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1613	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R1614	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1615-16	NRSA02J-271X	MG R	270Ω 1/10W J	*
R1701	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1703	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R1704	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1705	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1706	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1710	NRSA02J-331X	MG R	330Ω 1/10W J	*
R1713	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1714	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1716	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1717	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1718	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1719	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1720	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1721	NRSA02J-471X	MG R	470Ω 1/10W J	*
R1724	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1725	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1726-27	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1728	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1729	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1730	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1731	NRSA02J-561X	MG R	560Ω 1/10W J	*
R1732	NRSA02J-224X	MG R	220kΩ 1/10W J	*
R1733-34	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1735	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1736	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1739	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R1740	NRSA02J-101X	MG R	100Ω 1/10W J	*
R1741	NRSA02J-223X	MG R	22kΩ 1/10W J	*

△ Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R1742	NRSA02J-822X	MG R	8.2kΩ 1/10W J	*
R1743	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1744	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1745	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R1746	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1747	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1755	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1756-57	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1758-59	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1760	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1761	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1762	NRSA02J-822X	MG R	8.2kΩ 1/10W J	*
R1763	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1772	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1773	NRSA02J-121X	MG R	120Ω 1/10W J	*
R1781	QRL029J-221	OM R	220Ω 2W J	*
R1791-95	NRSA02J-561X	MG R	560Ω 1/10W J	*
R1801-03	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1804-06	NRSA02J-101X	MG R	100Ω 1/10W J	*
△ R1901	QRF074K-847	UNF R	0.47 Ω 7W K	*
R1902	QRE121J-333Y	C R	33kΩ 1/2W J	*
R1903	NRSA02J-681X	MG R	680Ω 1/10W J	*
R1904-05	QRT029J-R22	MF R	0.22Ω 2W J	*
R1907-08	QRL039J-393	OM R	39kΩ 3W J	*
R1909	QRE121J-332Y	C R	3.3kΩ 1/2W J	*
R1912-13	QRE121J-333Y	C R	33kΩ 1/2W J	*
R1914	QRE121J-2R2Y	C R	2.2Ω 1/2W J	*
R1915-16	NRSA02J-392X	MG R	3.9kΩ 1/10W J	*
R1917	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1918	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1920	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1924	QRG016J-221	OM R	220Ω 1W J	*
R1925	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1926	QRT029J-R82	MF R	0.82Ω 2W J	*
R1928	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R1931	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R1933	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R1934	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1936	QRE121J-222Y	C R	2.2kΩ 1/2W J	*
R1940	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1941	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1942	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1943	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R1944	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1945-46	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R1947	NRSA02J-472X	MG R	4.7kΩ 1/10W J	*
R1948	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1949	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R1951	QRT029J-1R2	MF R	1.2Ω 2W J	*
R1952	QRT029J-1R0	MF R	1.0Ω 2W J	*
R1954	QRE121J-272Y	C R	2.7kΩ 1/2W J	*
R1955	QRE121J-473Y	C R	47kΩ 1/2W J	*
R1956	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1957	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R1961	QRJ146J-3R3X	C R	3.3Ω 1/4W J	*
R1962	QRL029J-472	OM R	4.7kΩ 2W J	*
R1963	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R1964	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R1966	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R1967	QRE121J-683Y	C R	68kΩ 1/2W J	*
△ R1998	QRZ904J-275	C R	2.7MΩ 1/2W K	*
△ R1999	QRE121J-121Y	C R	120Ω 1/2W J	*
CAPACITOR				
C1001	QETN1HM-475Z	E CAP.	4.7μF 50V M	*
C1003	QETN1AM-477Z	E CAP.	470μF 10V M	*
C1004	QETN1CM-227Z	E CAP.	220μF 16V M	*
C1005	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1006	NCB21HK-103X	C CAP.	0.01μF 50V K	*

△ Symbol No.	Part No.	Part Name	Description	Local
CAPACITOR				
C1007	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1011	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1101	QFLC11HJ-104Z	M CAP.	0.1μF 50V J	*
C1102	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1103	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1104-05	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1106	NDC21HJ-680X	C CAP.	68pF 50V J	*
C1107	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1108	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1110	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1111	NCB21HK-222X	C CAP.	2200pF 50V K	*
C1131	QFV71HJ-154Z	MF CAP.	0.15μF 50V J	*
C1132	QFN31HJ-152Z	M CAP.	1500pF 50V J	*
C1133	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1134	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1135	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1137	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1161	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1162	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1163	NDC21HJ-220X	C CAP.	22pF 50V J	*
C1164-65	NDC21HJ-470X	C CAP.	47pF 50V J	*
C1166	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1168-70	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1171	NCB21HK-222X	C CAP.	2200pF 50V K	*
C1201	QENC1HM-475Z	BP E CAP.	4.7μF 50V M	*
C1202-04	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1205	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C1206	QETN1HM-105Z	E CAP.	1μF 50V M	*
C1207	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1208	NDC21HJ-680X	C CAP.	68pF 50V J	*
C1221	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1222-23	NDC21HJ-330X	C CAP.	33pF 50V J	*
C1224	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1225	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C1226	NDC21HJ-681X	C CAP.	680pF 50V J	*
C1228	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C1231	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1232	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1233	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1234-35	QETN1HM-105Z	E CAP.	1μF 50V M	*
C1301	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1302	NDC21HJ-100X	C CAP.	10pF 50V J	*
C1303	NCB21HK-223X	C CAP.	0.022μF 50V K	*
C1304	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1305	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1306	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1401	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C1402	QBHC1CK-225Z	TAN. CAP.	2.2μF 16V K	*
C1403	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1421	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1424	QETN1VM-107Z	E CAP.	100μF 35V M	*
C1425	QETM1VM-108	E CAP.	1000μF 35V M	*
C1426	QFLC2AK-563Z	M CAP.	0.056μF 100V K	*
C1427	QETM1EM-228	E CAP.	2200μF 25V M	*
C1428	QFV71HJ-684Z	MF CAP.	0.68μF 50V J	*
C1429	QFV71HJ-224Z	MF CAP.	0.22μF 50V J	*
C1501	QETN1CM-227Z	E CAP.	220μF 16V M	*
C1502	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1503	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1505	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1511	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1521	QCB32HK-151Z	C CAP.	150pF 500V K	*
C1522	QCB32HK-331Z	C CAP.	330pF 500V K	*
C1523	QETN2CM-105Z	E CAP.	1μF 160V M	*
△ C1531	QFZ0117-3501	M.PP CAPACITOR	3500pF 1.4kVH±2.5%	*
△ C1532	QFZ0117-1202	M.PP CAPACITOR	0.012μF 1.4kVH±2.5%	*
△ C1533	QFM72DK-124	M CAP.	0.12μF 200V K	*
C1534	QEHR2EM-225Z	E CAP.	2.2μF 250V M	*
△ C1535	QFZ0119-404	M.PP CAPACITOR	0.4μF 200V ±3%	*
C1536	QCB32HK-561Z	C CAP.	560pF 500V K	*

Symbol No.	Part No.	Part Name	Description	Local
CAPACITOR				
C1538	QE20420-107	E CAP.	100μF 160V M	*
C1541	QETN2EM-475Z	E CAP.	4.7μF 250V M	*
C1542	QETM1VM-228	E CAP.	2200μF 35V M	*
C1544	QETN1VM-107Z	E CAP.	100μF 35V M	*
C1545	QFLC2AJ-103Z	M CAP.	0.01μF 100V J	*
C1546	QFLC1HJ-473Z	M CAP.	0.047μF 50V J	*
C1548	QCB32HK-102Z	C CAP.	1000pF 500V K	*
C1551	QETN1HM-106Z	E CAP.	10μF 50V M	*
C1578-79	QEM61HK-475Z	E CAP.	4.7μF 50V K	*
C1602	QENC1HM-474Z	BP E CAP.	0.47μF 50V M	*
C1604	QENC1HM-474Z	BP E CAP.	0.47μF 50V M	*
C1605	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1606	QETN1EM-108Z	E CAP.	1000μF 25V M	*
C1607	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1608-09	QETN1CM-477Z	E CAP.	470μF 16V M	*
C1613	QETN1EM-476Z	E CAP.	47μF 25V M	*
C1614	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C1615	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1701-02	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1703	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1704	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1705	NDC21HJ-181X	C CAP.	180pF 50V J	*
C1706	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C1708	QETN1HM-105Z	E CAP.	1μF 50V M	*
C1709	NDC21HJ-221X	C CAP.	220pF 50V J	*
C1710-11	NDC21HJ-390X	C CAP.	39pF 50V J	*
C1712	NDC21HJ-270X	C CAP.	27pF 50V J	*
C1713	NDC21HJ-150X	C CAP.	15pF 50V J	*
C1714	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1715	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1716	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1717-18	NDC21HJ-330X	C CAP.	33pF 50V J	*
C1719	NDC21HJ-471X	C CAP.	470pF 50V J	*
C1720-21	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1724	NDC21HJ-471X	C CAP.	470pF 50V J	*
C1736	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1741	QFN31HJ-102Z	M CAP.	1000pF 50V J	*
C1743	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1744	NDC21HJ-681X	C CAP.	680pF 50V J	*
C1761	QFN31HJ-272Z	M CAP.	2700pF 50V J	*
C1771	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1772	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1773	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1774	QETN1CM-227Z	E CAP.	220μF 16V M	*
C1781	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1782	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C1783	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1784	QETN1HM-336Z	E CAP.	33μF 50V M	*
C1801-03	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
Δ C1901	QFZ9040-104	M.F. CAPACITOR	0.1μFAC275V M	*
Δ C1902	QFZ9040-473	M.M. CAPACITOR	0.047μFAC275V M	*
Δ C1903	QFZ9040-104	M.F. CAPACITOR	0.1μFAC275V M	*
Δ C1904	QCZ9052-102	C CAP.	1000pFAC125V M	*
Δ C1906	QCZ9078-102	C CAP.	1000pFAC250V M	*
Δ C1907	QCZ9078-102	C CAP.	1000pFAC250V M	*
Δ C1908	QCZ9078-102	C CAP.	1000pFAC250V M	*
Δ C1910	QE20169-477	E CAP.	470μF 200V M	*
C1911	QETN1VM-477Z	E CAP.	470μF 35V M	*
C1912	QFN31HJ-102Z	M CAP.	1000pF 50V J	*
C1913	QCZ0325-222	C CAP.	2200pF 2kV K	*
C1914	QCZ0325-391	C CAP.	390pF 2kV K	*
C1915	QFP326J-223	PP CAP.	0.022μF 400V J	*
C1916	QCZ0325-222	C CAP.	2200pF 2kV K	*
C1918	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1919	NCB21HK-222X	C CAP.	2200pF 50V K	*
C1920	QFLC1HJ-823Z	M CAP.	0.082μF 50V J	*
C1921-23	QCZ0132-152Z	C CAP.	1500pF 500V K	*
C1924	QE20420-107	E CAP.	100μF 160V M	*
C1925	QCZ0132-152Z	C CAP.	1500pF 500V K	*

Symbol No.	Part No.	Part Name	Description	Local
CAPACITOR				
C1926	QETM1CM-228	E CAP.	2200μF 16V M	*
C1927	QETN1CM-227Z	E CAP.	220μF 16V M	*
C1928	QETM1EM-108	E CAP.	1000μF 25V M	*
C1931-32	QETN1CM-476Z	E CAP.	47μF 16V M	*
C1934	NCB21HK-102X	C CAP.	1000pF 50V K	*
C1935	QETN2AM-106Z	E CAP.	10μF 100V M	*
C1937	QETN2CM-106Z	E CAP.	10μF 160V M	*
C1938	NDC21HJ-471X	C CAP.	470pF 50V J	*
C1951	QETN1CM-107Z	E CAP.	100μF 16V M	*
C1952	QETN1HM-476Z	E CAP.	47μF 50V M	*
C1954	QETN1HM-226Z	E CAP.	22μF 50V M	*
C1955	NCB21HK-473X	C CAP.	0.047μF 50V K	*
Δ C1990	QCZ9074-103	C CAP.	0.01μFAC125V M	*
Δ C1991	QCZ9074-103	C CAP.	0.01μFAC125V M	*

TRANSFORMER

Symbol No.	Part No.	Part Name	Description	Local
T1131	QOR0907-001	IFT		*
T1161	CEL7003-109J3	S.I.F. TRANSF.		*
T1521	CE42034-002	H.DRIVE TRANSF.		*
Δ T1522	QHM0032-001	F B T		*
Δ T1901	CET5107-001J8	SW TRANSF.		*

COIL

Symbol No.	Part No.	Part Name	Description	Local
L1001	QQL03BJ-101Z	COIL	100μH J	*
L1102	QQLZ014-R22	PEAKING COIL	0.22μH	*
L1103	QQLZ014-R68	PEAKING COIL	0.68μH	*
L1104	QQL03BJ-680Z	COIL	68μH J	*
L1131	QQL03BJ-330Z	COIL	33μH J	*
L1161	QQL03BJ-680Z	COIL	68μH J	*
L1162	QQL03BJ-220Z	COIL	22μH J	*
L1201	QQL03BJ-270Z	COIL	27μH J	*
Δ L1531	CELL009-003	LINIRITY COIL		*
L1532	QQLZ016-821	CHOKE COIL		*
Δ L1591	QQLZ018-340	HEATER CHOKE		*
L1701	QQL03BJ-SR6Z	COIL	5.6μH J	*
L1702	QQL244J-100Z	COIL	10μH J	*
L1707	QQL03BJ-SR6Z	COIL	5.6μH J	*
L1771	QQL03BJ-SR6Z	COIL	5.6μH J	*
L1921	QQL42AK-820Z	COIL	82μH K	*
L1922	QQL42AK-220Z	COIL	22μH K	*

DIODE

Symbol No.	Part No.	Part Name	Description	Local
D1001	MTZJ33A-T2	ZENER DIODE		*
D1221	MTZJ5.1B-T2	ZENER DIODE		*
D1231-34	1SS133-T2	SI. DIODE		*
D1421	1N4003-T2	SI. DIODE		*
D1422	MTZJ75-T2	ZENER DIODE		*
D1501	1SS133-T2	SI. DIODE		*
D1511	MTZJ3.3A-T2	ZENER DIODE		*
Δ D1531	RH3G-F1	SI. DIODE		*
Δ D1532	RU3AM-LFC4	SI. DIODE		*
D1533	RGP10J-5025-T3	SI. DIODE		*
D1541	RH1S-T3	SI. DIODE		*
D1542	RGP10J-5025-T3	SI. DIODE		*
D1544	1SS81-T2	SI. DIODE		*
D1546	1SR124-400A-T2	SI. DIODE		*
D1549	MTZJ9.1B-T2	ZENER DIODE		*
Δ D1551	MA4068N/Z1/-T2	ZENER DIODE		*
D1560-61	1SS133-T2	SI. DIODE		*
D1601-02	1SS133-T2	SI. DIODE		*
D1609	1SS133-T2	SI. DIODE		*
D1702-04	1SS133-T2	SI. DIODE		*
D1741-42	1SS133-T2	SI. DIODE		*
D1744	1SS133-T2	SI. DIODE		*
D1771-72	1SS133-T2	SI. DIODE		*
D1774	1SS133-T2	SI. DIODE		*

Symbol No.	Part No.	Part Name	Description	Local
DIODE				
D1801	MTZJ5.1B-T2	ZENER DIODE		*
D1804	1SS133-T2	SI DIODE		*
Δ D1901	D3SBA60-S1	BRIDGE DIODE		*
Δ D1902	RGP10J-5025-T3	SI DIODE		*
D1903-04	1SS133-T2	SI DIODE		*
D1905	EG1A-T3	SI DIODE		*
D1909	MTZJ15A-T2	ZENER DIODE		*
D1910	RGP10J-5025-T3	SI DIODE		*
D1911	1SS133-T2	SI DIODE		*
D1912	MTZJ15A-T2	ZENER DIODE		*
D1913-14	RGP10J-5025-T3	SI DIODE		*
D1916	RGP10J-5025-T3	SI DIODE		*
D1918	MTZJ13B-T2	ZENER DIODE		*
D1921	RU3AM-LFC4	SI DIODE		*
D1922	RU3YX-LFC4	SI DIODE		*
D1923	RGP10J-5025-T3	SI DIODE		*
D1925	RGP10J-5025-T3	SI DIODE		*
D1926-28	1SS133-T2	SI DIODE		*
D1931	1SS133-T2	SI DIODE		*
D1933	1SS133-T2	SI DIODE		*
D1941	MTZJ11A-T2	ZENER DIODE		*
D1942	MTZJ6.8C-T2	ZENER DIODE		*
D1951	MTZJ7.55-T2	ZENER DIODE		*

TRANSISTOR				
Q1101	2SC5083/L-P/-T	SI TRANSISTOR		*
Q1131-32	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1161	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1201-03	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1204-05	2SA1037AK/QR/-X	SI TRANSISTOR		*
Q1231-32	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1521	2SC4212/Z1/	SI TRANSISTOR		*
Δ Q1531	2SD2499-LB	SI TRANSISTOR	H. OUT	*
Q1541	2SA1037AK/QR/-X	SI TRANSISTOR		*
Δ Q1542	2SC2785/JH/-T	SI TRANSISTOR		*
Q1601	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1602	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1603	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1604	2SA1037AK/QR/-X	SI TRANSISTOR		*
Q1701	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1702	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1741	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1742	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1743-44	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1911	2SA1037AK/QR/-X	SI TRANSISTOR		*
Q1912	2SD2088-T	SI TRANSISTOR		*
Q1921	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1922	2SD1383K/AB/-X	SI TRANSISTOR		*
Q1923	2SA1020/Y/-T	SI TRANSISTOR		*
Q1924	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1925	2SA949/Y/Z1-T	SI TRANSISTOR		*
Q1926	2SC2240/GL/-T	SI TRANSISTOR		*
Q1927-28	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1929	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1931	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1942-43	2SC2412K/QR/-X	SI TRANSISTOR		*
Q1944	DTC124EKA-X	DIGI. TRANSISTOR		*
Q1951	2SA949/Y/Z1-T	SI TRANSISTOR		*

IC				
IC1001	K1A78L05BP-T	I.C. (MONO-ANA)		*
IC1101	UPC2409AHF	I.C. (MONO-ANA)		*
IC1201	TA1242N	I.C. (MONO-ANA)		*
IC1202	TC4066BP	I.C. (DIGI-MOS)		*
IC1221	MSM5256RS	I.C. (DIGI-MOS)		*
Δ IC1421	LA7832	I.C. (MONO-ANA)		*
Δ IC1601	LA4485	I.C. (MONO-ANA)		*
IC1701	MN1876478JC	I.C.		*

Symbol No.	Part No.	Part Name	Description	Local
IC				
IC1702	AT24C08-27985U	I.C.	(SERVICE)	*
IC1703	MN1381/Q/-T	I.C. (MONO-ANA)		*
IC1771	AN77L05-T	I.C. (MONO-ANA)		*
IC1781	AN7705F	I.C. (MONO-ANA)		*
Δ IC1901	STR-F6626	I.C.		*
Δ IC1941	SE135N	I.C. (HYBRID)		*

OTHERS				
CF1001	FTP47.25MF	CERAMIC FILTER		*
CF1131	QAX0339-001	CERAMIC FILTER		*
CF1161	SF5H4.5MCB	CERAMIC FILTER		*
CF1501	CSB503F30-T2	CER. RESONATOR		*
CF1701	FCR12.0M2S	CER. RESONATOR		*
CN1001	CHB303W-35R-J	RECEPTACLE		*
Δ CN10PW	QMPD070-200-JC	POWER CORD		*
Δ F1901	QMF0007-5R0J1	FUSE	5.0A	*
K1421	QQR0582-001Z	BEADS CORE		*
K1901	CE41433-001Z	BEADS CORE		*
K1903	CE41433-001Z	BEADS CORE		*
K1921	CE41433-001Z	BEADS CORE		*
K1922	QQR0621-001Z	BEADS CORE		*
Δ LF1901	CELF008-001J5	LINE FILTER		*
Δ LF1902	CE42335-001J1	LINE FILTER		*
Δ PC1901	TLP621(B)	I.C. (PH. COUPLER)		*
Δ PC1902	TLP621(B)	I.C. (PH. COUPLER)		*
Δ RY1901	CESK028-001	RELAY		*
Δ RY1921	CESK028-001	RELAY		*
S1421	QSL4A13-C02	LEVER SWITCH	(V. CENTER SW)	*
SF1101	CE42604-201	SAW FILTER		*
Δ TH1901	CEKP007-002	P. THERMISTOR		*
Δ TU1001	QAU0071-001	TUNER		*
Δ VA1901	ERZV10V361CS	VARISTOR		*
W1156-57	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1159	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1161	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1164	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1166-67	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1170-71	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1175-76	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1178	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1180	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1187	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1191	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1193-94	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1201	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1205	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1263	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1267-68	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1276-78	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1293-95	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1297	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1299	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W1300	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
X1221	QAX0271-001Z	CRYSTAL		*
X1301	QAX0310-001Z	CRYSTAL		*
Y1705	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
Y1710	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*

CRT SOKET P.W. BOARD ASS'Y (SGV-3003A-M2)

Symbol No.	Part No.	Part Name	Description	Local
------------	----------	-----------	-------------	-------

RESISTOR

R3351-53	NRSA02J-221X	MG R	220Ω 1/10W J	*
R3354-56	NRSA02J-181X	MG R	180Ω 1/10W J	*
R3357-59	NRSA02J-101X	MG R	100Ω 1/10W J	*
R3360-62	QRZ0111-152	C R	1.5kΩ 1/2W K	*
R3363-65	QRG029J-103	OM R	10kΩ 2W J	*
R3366-68	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R3381	QRE121J-394Y	C R	390kΩ 1/2W J	*

CAPACITOR

C3354-55	NCS21HJ-331X	C CAP.	330pF 50V J	*
C3356	NCS21HJ-391X	C CAP.	390pF 50V J	*
C3357	QETN1CM-107Z	E CAP.	100μF 16V M	*
C3381	QETN2EM-225Z	E CAP.	2.2μF 250V M	*
Δ C3382	QCZ9074-103	C CAP.	0.01μFAC125V M	*

COIL

L3381	QQL39BK-101Z	COIL	100μH K	*
-------	--------------	------	---------	---

TRANSISTOR

Q3351-53	25C4544-LB	SI. TRANSISTOR		*
----------	------------	----------------	--	---

OTHERS

Δ SK3351	CE42535-001J1	CRT SOCKET		*
----------	---------------	------------	--	---

AV SELECTOR P.W. BOARD ASS'Y**(SGV-8003A-M2)**

Symbol No.	Part No.	Part Name	Description	Local
------------	----------	-----------	-------------	-------

RESISTOR

R8002	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8003-04	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R8005	QRJ146J-5R6X	C R	5.6Ω 1/4W J	*
R8101	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8102	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8103	NRSA02J-182X	MG R	1.8kΩ 1/10W J	*
R8104	NRSA02J-180X	MG R	18Ω 1/10W J	*
R8105	NRSA02J-270X	MG R	27Ω 1/10W J	*

R8106	QRE121J-101Y	C R	100Ω 1/2W J	*
R8109	NRVA02D-221X	MF R	220Ω 1/10W D	*
R8110-11	NRSA02J-104X	MG R	100kΩ 1/10W J	*
R8112	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8113	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8115	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8117	NRSA02J-181X	MG R	180Ω 1/10W J	*
R8119	NRSA02J-821X	MG R	820Ω 1/10W J	*

R8120	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8121	NRSA02J-330X	MG R	33Ω 1/10W J	*
R8124	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R8125	NRSA02J-334X	MG R	330kΩ 1/10W J	*
R8126	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8201	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8202	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8203	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*

R8204	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8211	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8212	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8213	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8215-16	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8217	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8271	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8272	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*

R8273	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R8275	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8276	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*
R8301-02	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8303	NRSA02J-393X	MG R	39kΩ 1/10W J	*
R8304	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R8305	NRSA02J-272X	MG R	2.7kΩ 1/10W J	*
R8306	NRSA02J-471X	MG R	470Ω 1/10W J	*

R8308	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8310-11	NRSA02J-153X	MG R	15kΩ 1/10W J	*
R8371	NRSA02J-222X	MG R	2.2kΩ 1/10W J	*
R8372	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8375	NRSA02J-183X	MG R	18kΩ 1/10W J	*
R8376	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8377	NRSA02J-152X	MG R	1.5kΩ 1/10W J	*
R8378	NRSA02J-0R0X	MG R	0.0Ω 1/10W J	*

R8601	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8602-03	NRSA02J-682X	MG R	6.8kΩ 1/10W J	*
R8604	NRSA02J-683X	MG R	68kΩ 1/10W J	*
R8605	NRSA02J-332X	MG R	3.3kΩ 1/10W J	*
R8606	NRSA02J-333X	MG R	33kΩ 1/10W J	*
R8607	NRVA02D-153X	MF R	15kΩ 1/10W D	*
R8609	NRVA02D-152X	MF R	1.5kΩ 1/10W D	*
R8611	NRSA02J-512X	MG R	5.1kΩ 1/10W J	*

R8613-16	NRSA02J-101X	MG R	100Ω 1/10W J	*
R8661	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R8662	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R8663-64	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R8665	NRSA02J-473X	MG R	47kΩ 1/10W J	*
R8666	NRSA02J-123X	MG R	12kΩ 1/10W J	*
R8667-68	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8671	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*

R8672	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8683-86	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8691-94	NRSA02J-221X	MG R	220Ω 1/10W J	*

FRONT CONTROL P.W. BOARD ASS'Y (SGV-4001A-M2)

Refer to PARTS LIST in page 38 for this P.W. board.

Symbol No.	Part No.	Part Name	Description	Local
RESISTOR				
R8695-96	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R8801-03	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8804-05	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R8806-07	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8808	NRSA02J-820X	MG R	82Ω 1/10W J	*
R8809-10	NRSA02J-823X	MG R	82kΩ 1/10W J	*
R8813	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8814-16	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8817	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8818	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8819	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8820-21	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8822-23	NRSA02J-221X	MG R	220Ω 1/10W J	*
R8824	NRSA02J-102X	MG R	1kΩ 1/10W J	*
R8829	NRSA02J-103X	MG R	10kΩ 1/10W J	*
R8831-33	NRSA02J-563X	MG R	56kΩ 1/10W J	*
R8851	NRSA02J-562X	MG R	5.6kΩ 1/10W J	*
R8852	NRSA02J-223X	MG R	22kΩ 1/10W J	*
R8854	NRSA02J-101X	MG R	100Ω 1/10W J	*

CAPACITOR

C8001	QETN1HM-475Z	E CAP.	4.7μF 50V M	*
C8003	QETN1CM-107Z	E CAP.	100μF 16V M	*
C8004	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8005	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8006	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8007-08	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8101-03	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8104	NCB21HK-222X	C CAP.	2200pF 50V K	*
C8105	QETN1CM-107Z	E CAP.	100μF 16V M	*
C8106	NCB21HK-222X	C CAP.	2200pF 50V K	*
C8107	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8108	NDC21HJ-101X	C CAP.	100pF 50V J	*
C8109-10	QFV71HJ-224Z	MF CAP.	0.22μF 50V J	*
C8112	NCB21HK-222X	C CAP.	2200pF 50V K	*
C8113	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8114	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C8115	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8116	QETN1CM-107Z	E CAP.	100μF 16V M	*
C8117	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8118	QFV71HJ-474Z	MF CAP.	0.47μF 50V J	*
C8201	QETN1CM-107Z	E CAP.	100μF 16V M	*
C8211	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8212	NDC21HJ-330X	C CAP.	33pF 50V J	*
C8216	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8271	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8303	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8306	NDC21HJ-680X	C CAP.	68pF 50V J	*
C8307	NDC21HJ-271X	C CAP.	270pF 50V J	*
C8308	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8371	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8375	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8601	QETN1CM-107Z	E CAP.	100μF 16V M	*
C8602	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8603	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8604	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C8605	QENC1HM-475Z	BP E CAP.	4.7μF 50V M	*
C8606	QENC1HM-105Z	BP E CAP.	1μF 50V M	*
C8607	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C8608	NCB21HK-473X	C CAP.	0.47μF 50V K	*
C8609	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C8610-11	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C8612	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8613	QBTC1CK-335Z	TAN. CAP.	3.3μF 16V K	*
C8614	QBTC1CK-106Z	TAN. CAP.	10μF 16V K	*
C8615-16	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8617	QETN1HM-475Z	E CAP.	4.7μF 50V M	*
C8618	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8619	NCB21HK-273X	C CAP.	0.027μF 50V K	*

Symbol No.	Part No.	Part Name	Description	Local
CAPACITOR				
C8620	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C8621	NCB21HK-222X	C CAP.	2200pF 50V K	*
C8622	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C8623	QETN1HM-225Z	E CAP.	2.2μF 50V M	*
C8624	NCB21HK-222X	C CAP.	2200pF 50V K	*
C8625	NCB21HK-104X	CHIP CAP.	0.1μF 50V K	*
C8628	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8661-62	QENC1HM-105Z	BP E CAP.	1μF 50V M	*
C8664	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8691-92	QETN1HM-474Z	E CAP.	0.47μF 50V M	*
C8814	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8815-16	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8817-18	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8819	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8820-21	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8822	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8823	QETN1HM-105Z	E CAP.	1μF 50V M	*
C8833-37	NCB21HK-102X	C CAP.	1000pF 50V K	*
C8842-43	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8845	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8846-47	NCB21HK-103X	C CAP.	0.01μF 50V K	*
C8848-49	QENC1HM-105Z	BP E CAP.	1μF 50V M	*
C8850-51	QETN1CM-476Z	E CAP.	47μF 16V M	*
C8852	QENC1HM-105Z	BP E CAP.	1μF 50V M	*
C8854	QETN1HM-106Z	E CAP.	10μF 50V M	*
C8855	QENC1HM-105Z	BP E CAP.	1μF 50V M	*

COIL

L8003	QQL03BJ-150Z	COIL	15μH J	*
L8101	QQL2014-R22	PEAKING COIL	0.22μH	*
L8103	CE42452-003	COIL		*
L8104	QQL03BJ-180Z	PEAKING COIL	18μH	*
L8106	QQL03BJ-5R6Z	COIL	5.6μH J	*
L8211	QQL03BJ-220Z	COIL	22μH J	*
L8302	QQL03BJ-150Z	COIL	15μH J	*

DIODE

D8693-94	MTZJ9.1C-T2	ZENER DIODE		*
D8703	MTZJ5.6B-T2	ZENER DIODE		*
D8814-23	MTZJ9.1C-T2	ZENER DIODE		*

TRANSISTOR

Q8101	2SC5083/L-P/-T	SI. TRANSISTOR		*
Q8102	2SA1037AK/QR/-X	SI. TRANSISTOR		*
Q8201	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8211	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8212	2SA1037AK/QR/-X	SI. TRANSISTOR		*
Q8271	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8302	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8304-05	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8371	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8671-72	DTC124EKA-X	DIGI. TRANSISTOR		*
Q8683-86	2SC2412K/QR/-X	SI. TRANSISTOR		*
Q8803	2SA1037AK/QR/-X	SI. TRANSISTOR		*
Q8851-52	DTC124EKA-X	DIGI. TRANSISTOR		*

IC

IC8001	KIA78L05BP-T	I.C. (MONO-ANA)		*
IC8101	LA7583	I.C. (MONO-ANA)		*
IC8601	UPC1851BCU	I.C.		*
IC8661	BA15218N	I.C. (MONO-ANA)		*
IC8671	TC4066BP	I.C. (DIGI-MOS)		*
IC8801	CXA1545A5	I.C. (MONO-ANA)		*
IC8803	TC4066BP	I.C. (DIGI-MOS)		*

△ Symbol No.	Part No.	Part Name	Description	Local
OTHERS				
CF8102	FCR5.71M2SF3	CER. RESONATOR		*
CF8103	QAX0339-001	CERAMIC FILTER		*
CM8201	CE42599-001	COMB FILTER		*
CN8001	CHB303W-35P-J	PLUG		*
DL8201	CE42464-001	BPF&DL MODULE		*
J8801-02	QNZ0117-001	PIN JACK		*
J8803	QNN0181-001	PIN JACK		*
J8804-05	QNS0001-001	JACK		*
SF8101	QAX0483-001	SAW FILTER		*
△ TU8001	QAU0071-001	TUNER		*
W8071	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8072	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8096	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8102-03	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8108	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8159	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8162	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8169	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*
W8172	NRSA02J-OROX	MG R	0.0Ω 1/10W J	*

PIP P.W. BOARD ASS'Y (SGV0P001A-M2)

Refer to PARTS LIST in page 40 for this P.W. board.


GUIDE PLUS + MODULE P.W. BOARD ASS'Y (SGV0T001A-M2)

△ Symbol No.	Part No.	Part Name	Description	Local
OTHERS				
	SGV0T001A-M2	GUIDE PULS + MODULE		

REMOTE CONTROL UNIT PARTS LIST (RM-C752-1C)

△ Ref.No.	Part No.	Part Name	Description	Local
	2AA015250	BATTERY COVER		*

PACKING

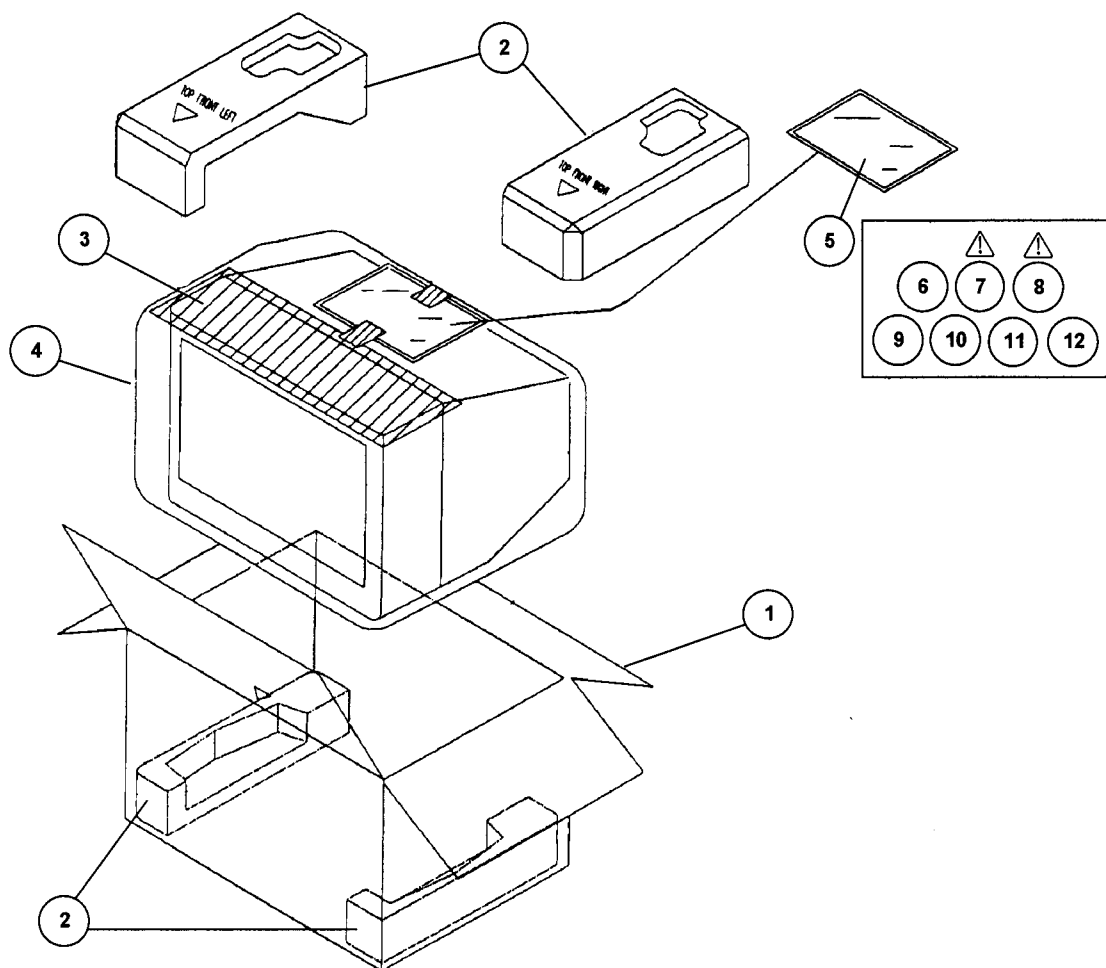

AV-27980


PACKING PARTS LIST

△ Ref.No.	Part No.	Part Name	Description	Local
[America Model]				
1	CP11499-016-A	PACKING CASE	4pcs in 1set	*
2	LC10083-004B-A	CUSHION ASSY		*
3	CP30055-001-A	TOP COVER		*
4	CP30056-008-A	POLY BAG		*
5	QPGA025-03505A	POLY BAG		*
6	RM-C752-1C	REMOCON UNIT		*
△ 7	LCT0135-001A-A	INST BOOK	(ENGLISH)	*
9	BT-51006-1Q	REGISTER CARD		*
12	CE42597-00A	IR MOUSE		*
[Canada Model]				
1	CP11499-016-A	PACKING CASE	4pcs in 1set	*
2	LC10083-004B-A	CUSHION ASSY		*
3	CP30055-001-A	TOP COVER		*
4	CP30056-008-A	POLY BAG		*
5	QPGA025-03505A	POLY BAG		*
6	RM-C752-1C	REMOCON UNIT		*
△ 7	LCT0135-001A-A	INST BOOK	(ENGLISH)	*
△ 8	LCT0136-001A-A	INST BOOK	(FRENCH)	*
10	BT-52002-1Q	WARRANTY CARD		*
11	BT-20071B-Q	SVC CENTER LIST		*
12	CE42597-00A	IR MOUSE		*

AV-27985 (US&CA)**EXPLODED VIEW PARTS LIST**

△ Ref.No.	Part No.	Part Name	Description	Local
△ L01	CE41329-00DJB	DEG COIL		*
△ V01	A68ADT25X01	ITC TUBE(C)	(Inc.DY)	*
△ T1522	QQH0032-001	F B T	(Within MAIN PWB)	*
△ 1	CM12919-006-MA	FRONT CABINET		*
2	CHGB0015-0B	BRAIDED WIRE		*
3	CHGB0016-0C	BRAIDED SUB WIRE		*
△ 4	CEB5S12D-04KJ2	SPEAKER	(×2)SP01,SP02	*
5	CM36568-B01-VA	PUSH KNOB		*
6	CM12689-B01-VA	CHASSIS BASE		*
7	CEGA008-001	ANT.SPLITTER		*
△ 8	CM48140-A03-A	CORD CLAMP		*
△ 9	QMPD070-200-JC	POWER CORD	(SERVICE)	*
△ 10	LC20087-001B-A	TERMINAL BOARD		*
11	SB5B3010Z	TAPPING SCREW	(×3)	*
△ 12	CM12920-D01-MA	REAR COVER		*
13	GB5B4016Z	TAPPING SCREW	(×9)	*
△ 14	CM23034-001-A	RATING LABEL	(US)	*
△ 14	CM22999-001-A	RATING LABEL	(CA)	*
15	CM35983-001-H	REMOCON WINDOW		*
16	CM48006-A03-H	JVC MARK		*

EXPLODED VIEW

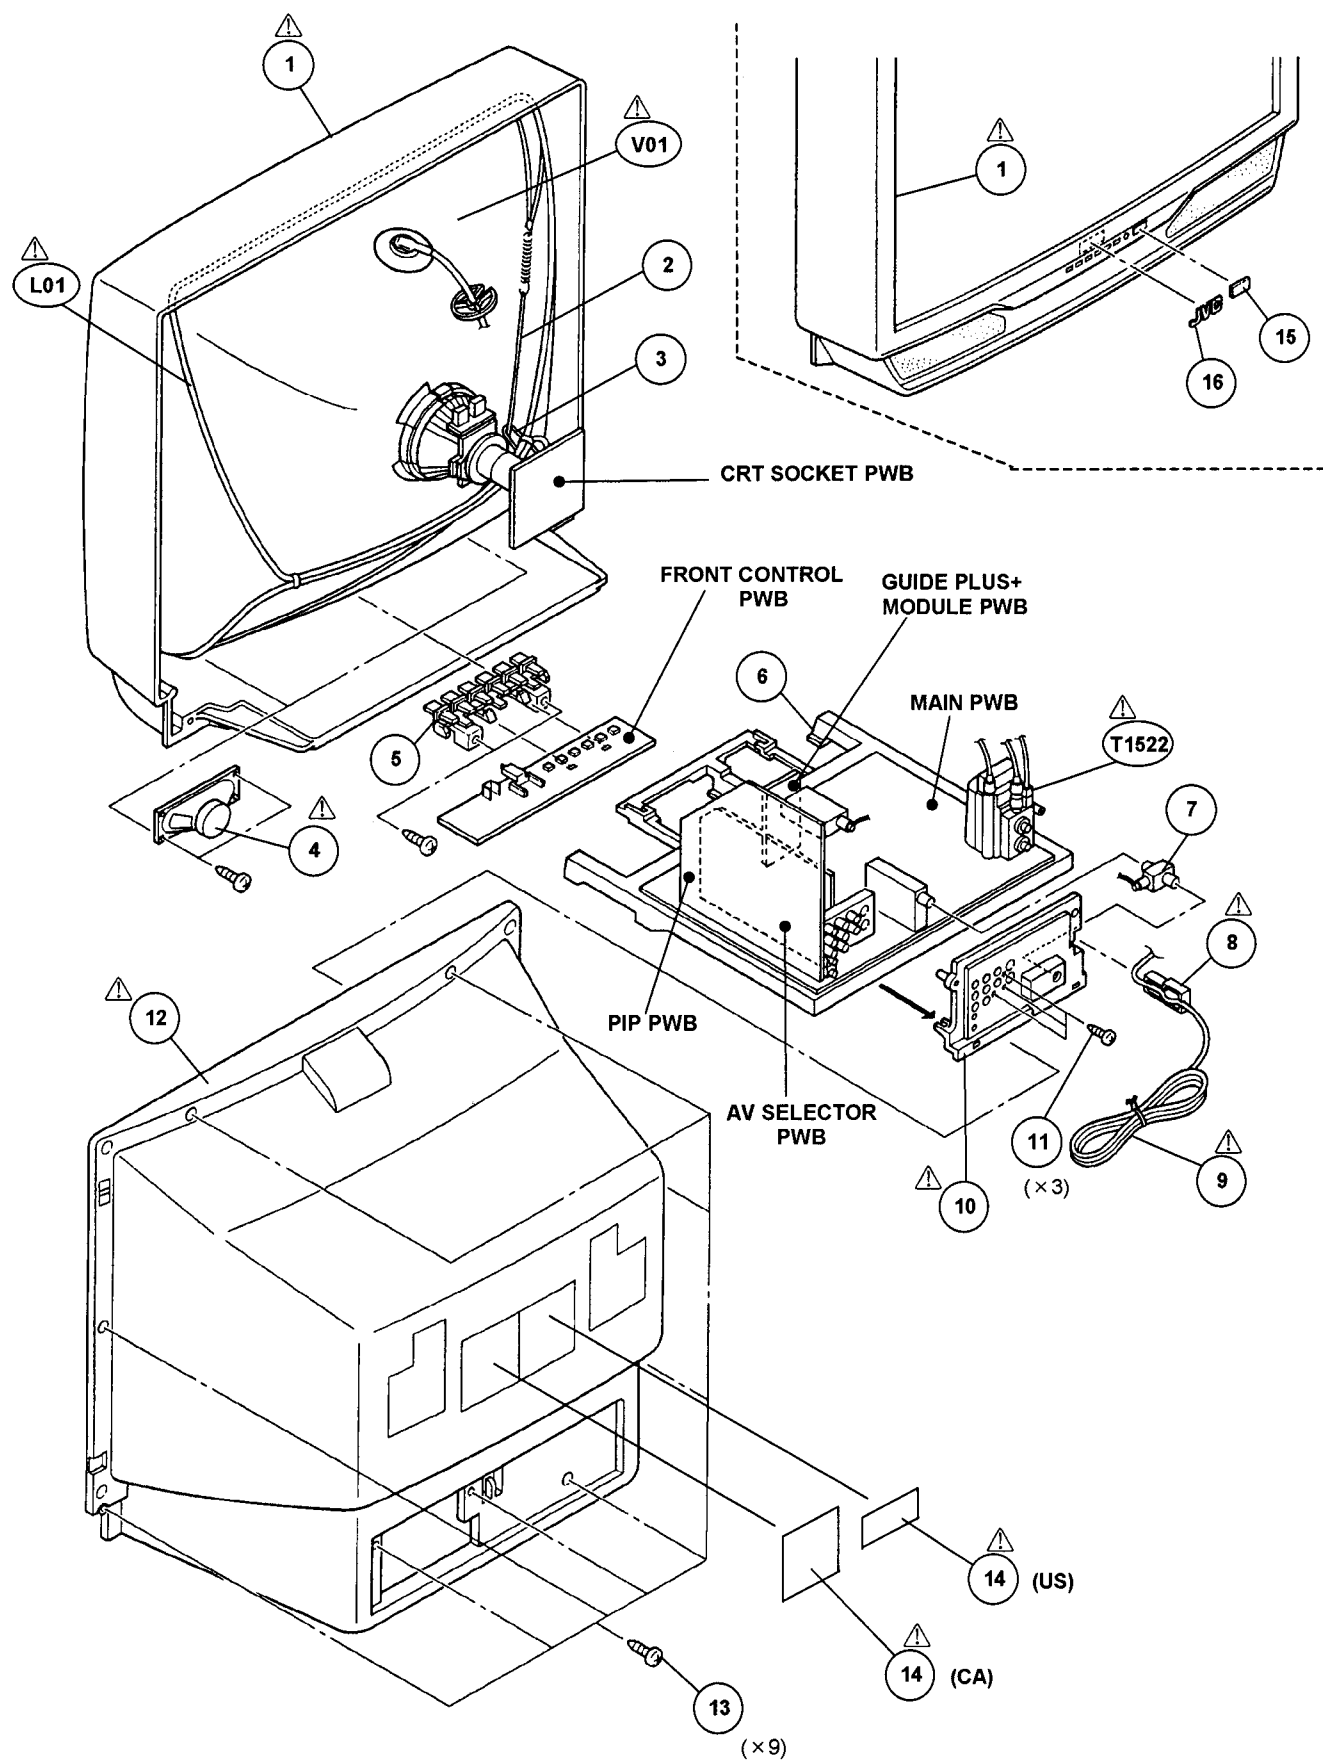

AV-27985

PRINTED WIRING BOARD PARTS LIST

MAIN P.W. BOARD ASS'Y (SGV-1005A-M2)
Refer to PARTS LIST in page 46 for this P.W. board.

AV SELECTOR P.W. BOARD ASS'Y
(SGV-8003A-M2)
Refer to PARTS LIST in page 50 for this P.W. board.

CRT SOKET P.W. BOARD ASS'Y (SGV-3003A-M2)
Refer to PARTS LIST in page 50 for this P.W. board.

PIP P.W. BOARD ASS'Y (SGV0P001A-M2)
Refer to PARTS LIST in page 40 for this P.W. board.


FRONT CONTROL P.W. BOARD ASS'Y
(SGV-4001A-M2)
Refer to PARTS LIST in page 38 for this P.W. board.

GUIDE PLUS + MODULE P.W. BOARD ASS'Y
(SGV0T001A-M2)
Refer to PARTS LIST in page 52 for this P.W. board.

REMOTE CONTROL UNIT PARTS LIST (RM-C888-1A)

△ Ref.No.	Part No.	Part Name	Description	Local
	103RRC-AAA-01R	BATTERY COVER		*

PACKING

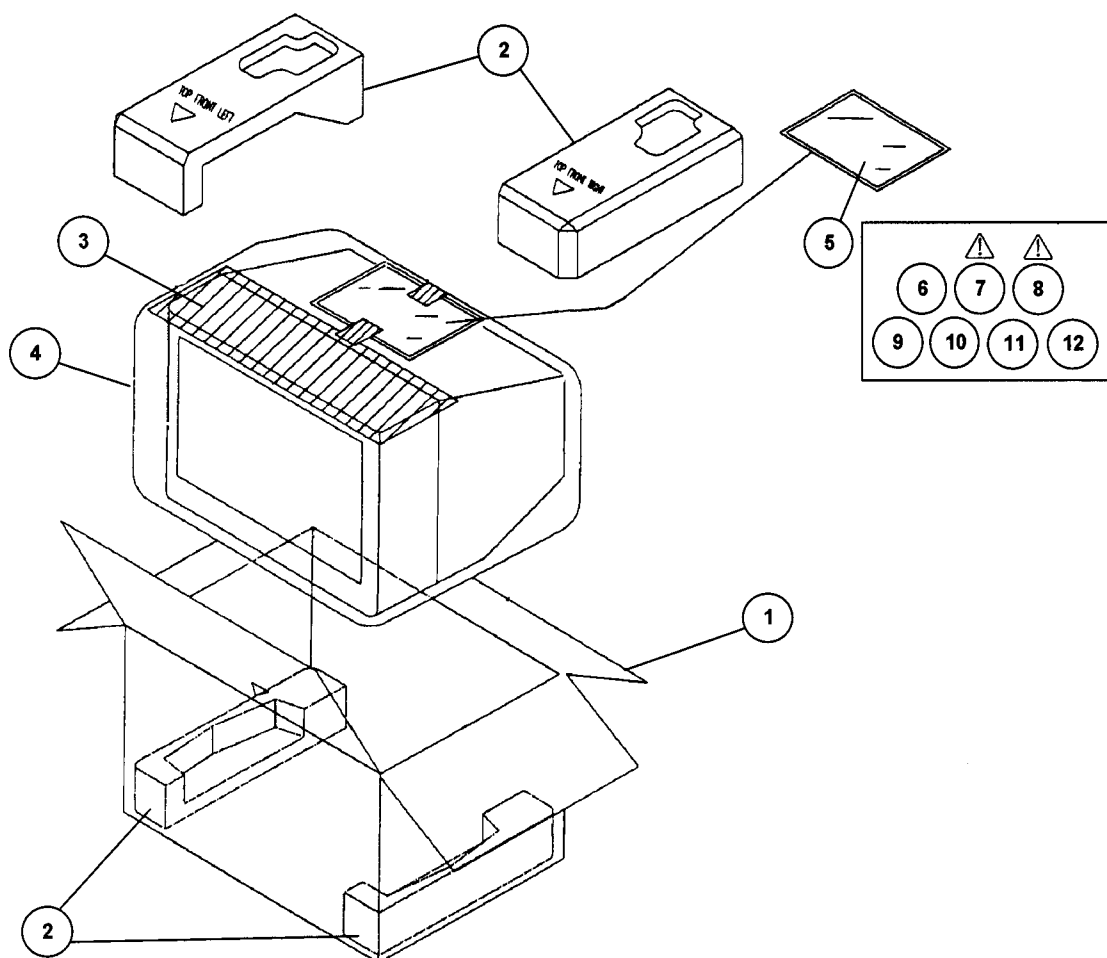

PACKING PARTS LIST

△ Ref.No.	Part No.	Part Name	Description	Local
[America Model]				
1	CP11499-016-A	PACKING CASE		*
2	LC10083-004B-A	CUSHION ASSY	4pcs in 1set	*
3	CP30055-001-A	TOP COVER		*
4	CP30056-008-A	POLY BAG		*
5	QPGA025-03505A	POLY BAG		*
6	RM-C888-1A	REMOCON UNIT		*
△ 7	LCT0137-001A-A	INST BOOK	(ENGLISH)	*
9	BT-51006-1Q	REGISTER CARD		*
12	CE42597-00A	IR MOUSE		*
[Canada Model]				
1	CP11499-016-A	PACKING CASE		*
2	LC10083-004B-A	CUSHION ASSY	4pcs in 1set	*
3	CP30055-001-A	TOP COVER		*
4	CP30056-008-A	POLY BAG		*
5	QPGA025-03505A	POLY BAG		*
6	RM-C888-1A	REMOCON UNIT		*
△ 7	LCT0137-001A-A	INST BOOK	(ENGLISH)	*
△ 8	LCT0138-001A-A	INST BOOK	(FRENCH)	*
10	BT-52002-1Q	WARRANTY CARD		*
11	BT-20071B-Q	SVC CENTER LIST		*
12	CE42597-00A	IR MOUSE		*

AV-27950
AV-27980
AV-27985

MEMO

MEMO

JVC SERVICE & ENGINEERING COMPANY OF AMERICA

DIVISION OF US JVC CORP.

Head office :	107 Little Falls Road, Fairfield, New Jersey 07004	(973)808-9279
(East Coast)		
Midwest :	705 Enterprise St. Aurora, Illinois 60504	(630)851-7855
West Coast :	5665 Corporate Avenue, Cypress, California 90630	(714)229-8011
Southeast :	1500 Lakes Parkway, Lawrenceville, Georgia 30243	(770)339-2522
Hawaii :	2969 Mapunapuna Place, Honolulu, Hawaii 96819	(808)833-5828

JVC CANADA INC.

Head office :	21 Finchdene Square Scarborough, Ontario M1X 1A7	(416)293-1311
Vancouver :	13040 Worster Court Richmond B.C. V6V 2B3	(604)270-1311

JVC